

圆形线卡
Circle Cable Clips

- 1、 Features: Nail inserted in the clip, used to fix cables and pipes, not easy to aging.

2、 Material: Clip is made of PE, nail is made of high strength carbon steel.



3、 Color: White, Black, other colors are available as requested.

4、 Certificates: CE, RoHS
- 1、 特点：高强度钢钉嵌入塑料件中，用于固定电缆和管道，不易老化。

2、 材质：全新PE材料和高强度碳钢制成。

3、 颜色：白色、黑色，其他颜色可根据要求提供。

4、 认证：CE、RoHS

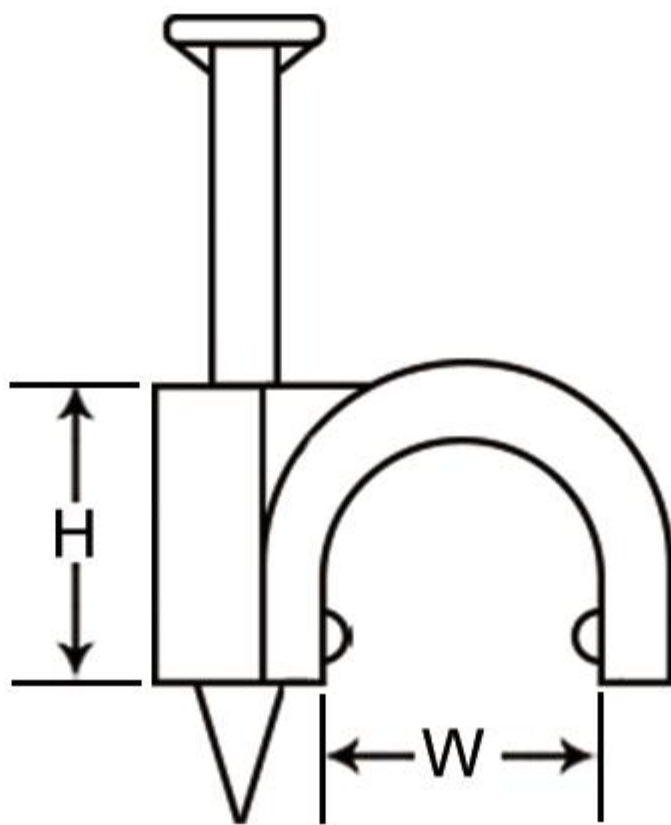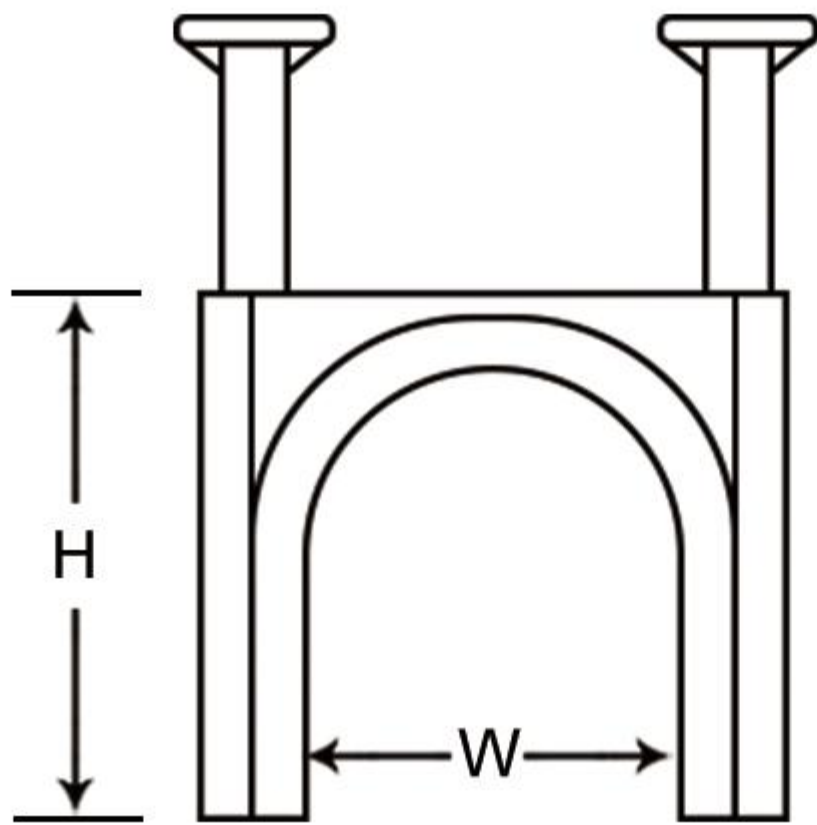

Item No.	Width(W)		Height(H)		Nail Dia. * Length
	mm	inch	mm	inch	mm*mm
NL-NC03	3	0.12	4	0.16	1.7*15
NL-NC04	4	0.16	4.8	0.19	1.7*15
NL-NC05	5	0.2	5.6	0.22	1.7*15
NL-NC06	6	0.24	7.9	0.31	1.8*16
NL-NC07	7	0.28	9.2	0.36	1.8*18
NL-NC08	8	0.31	9.7	0.38	1.9*19
NL-NC09	9	0.35	10.9	0.43	2.0*20
NL-NC10	10	0.39	12.4	0.49	2.0*22
NL-NC12	12	0.47	14.8	0.58	2.0*25
NL-NC14	14	0.55	17.6	0.69	2.3*30
NL-NC16	16	0.63	18	0.71	2.3*30
NL-NC18	18	0.71	19	0.75	2.5*38
NL-NC20	20	0.79	22	0.87	2.5*38
NL-NC22	22	0.87	25	0.98	2.8*40
NL-NC25	25	0.98	27.3	1.07	2.8*40
NL-NC30	30	1.18	33	1.3	3.0*52
NL-NC32	32	1.26	35	1.38	3.0*52
NL-NC35	35	1.38	36.6	1.44	3.0*57
NL-NC40	40	1.57	45.2	1.78	3.0*60
NL-NC50	50	1.97	50	1.97	3.5*75

方形线卡
Flat Cable Clips

- 1、Features: Nail inserted in the clip, used to fix cables and pipes, not easy to aging.

2、Material: Clip is made of PE, nail is made of high strength carbon steel.


3、Color: White, Black, other colors are available as requested.

4、Certificates: CE, RoHS
- 1、特点：高强度钢钉嵌入塑料件中，用于固定电缆和管道，不易老化。

2、材质：全新PE材料和高强度碳钢制成。

3、颜色：白色、黑色，其他颜色可根据要求提供。

4、认证：CE、RoHS

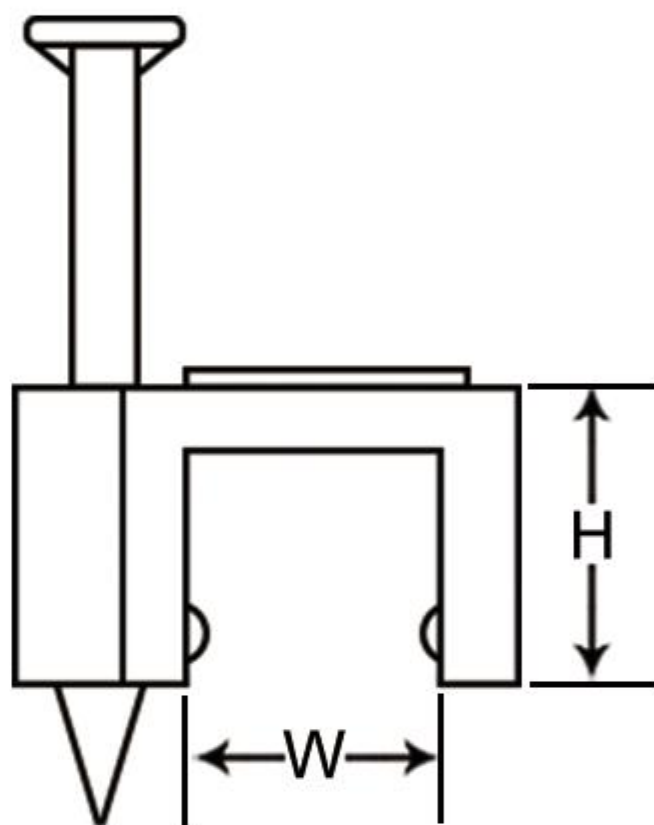

Item No.	Width(W)		Height(H)		Nail Dia. * Length
	mm	inch	mm	inch	mm*mm
NL-NC04F	4	0.16	4.8	0.19	1.7*15
NL-NC05F	5	0.2	5.3	0.21	1.7*15
NL-NC06F	6	0.24	6.2	0.24	1.8*16
NL-NC07F	6.8	0.27	6.3	0.25	1.8*16
NL-NC08F	8	0.31	6.8	0.27	1.8*16
NL-NC09F	9	0.35	7.1	0.28	1.8*18
NL-NC10F	10	0.39	7.4	0.29	1.8*18
NL-NC12F	12	0.47	7.5	0.3	1.9*19
NL-NC14F	13.5	0.53	8.5	0.33	2.0*20
NL-NC16F	16	0.63	11	0.43	2.0*25

超强线卡
Super Strong Cable Clips

- 1、Features: Nail inserted in the clip, the nail is bigger and longer, the clip is thicker and stronger, can fix the cables and pipes more stable, not easy to aging.

2、Material: Clip is made of PE, nail is made of medium carbon steel.

3、Color: White, Black, other colors are available as requested.

4、Certificates: CE, RoHS
- 1、特点：高强度钢钉嵌入塑料件，钉子更大更长，塑料件更厚更结实，能更稳固地固定电缆和管道，不易老化。

2、材质：全新PE材料和高强度碳钢。

3、颜色：白色、黑色，其他颜色可根据要求提供。

4、认证：CE、RoHS



Item No.	Width(W)		Height(H)		Nail Dia. * Length
	mm	inch	mm	inch	mm*mm
NL-NC04L	4	0.16	6.3	0.25	2.5*20
NL-NC05L	5	0.2	7.3	0.29	2.5*20
NL-NC06L	6	0.24	9.5	0.37	2.5*20
NL-NC07L	7	0.28	11.2	0.44	2.5*22
NL-NC08L	8	0.31	11.4	0.45	2.5*22
NL-NC09L	9	0.35	12	0.47	2.5*22
NL-NC10L	10	0.39	13	0.51	2.5*25
NL-NC12L	12	0.47	15.2	0.6	2.5*27
NL-NC14L	14	0.55	17	0.67	2.5*27
NL-NC16L	16	0.63	19.8	0.78	3.0*38
NL-NC18L	18	0.71	22	0.87	3.0*38
NL-NC20L	20	0.79	23.8	0.94	3.2*40
NL-NC22L	22	0.87	25.6	1.01	3.2*40
NL-NC25L	25	0.98	27.7	1.09	3.2*45
NL-NC30L	30	1.18	33	1.3	3.2*52
NL-NC32L	32	1.26	35	1.38	3.2*52
NL-NC35L	35	1.38	36.6	1.44	3.2*57
NL-NC40L	40	1.57	45.2	1.78	3.2*60
NL-NC07FL	7	0.28	6.7	0.26	2.5*20
NL-NC08FL	8	0.31	7.7	0.3	2.5*20
NL-NC09FL	9	0.35	8.5	0.33	2.5*22
NL-NC10FL	10	0.39	9.4	0.37	2.5*22
NL-NC12FL	12	0.47	10.6	0.42	2.5*25

膨胀管
Wall Plugs

- 1、 Features: Nail inserted in the clip, used to fix cables and pipes, not easy to aging.

2、 Material: Clip is made of PE, nail is made of high strength carbon steel.


3、 Color: White, Grey, other colors are available as requested.

4、 Certificates: CE, RoHS
- 1、 特点：高强度钢钉嵌入塑料件中，用于固定电缆和管道，不易老化。

2、 材质：全新PE材料和高强度碳钢制成。

3、 颜色：白色、灰色，其他颜色可根据要求提供。

4、 认证：CE、RoHS

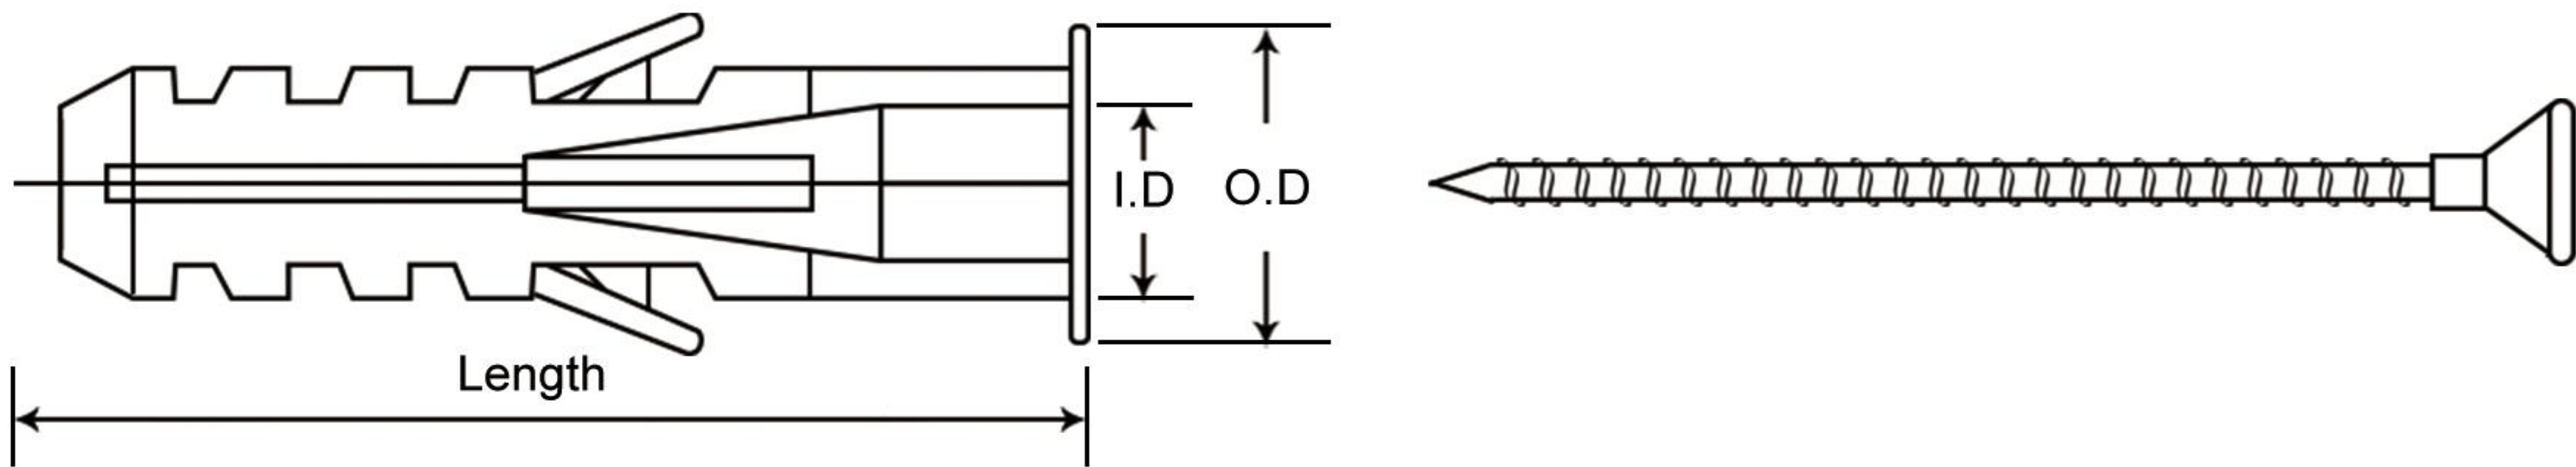

Item No.	Length(L)		Outer Diameter		Inner Diameter		Screw diameter*length	
	mm	inch	mm	inch	mm	inch	mm	inch
NL-WP4x20	20	0.79	4	0.16	3	0.12	2.0*20	0.08*0.79
NL-WP5x25	25	0.98	5	0.20	4	0.16	2.5*25	0.1*1
NL-WP6x30	30	1.18	6	0.24	5	0.20	4.0*30	0.16*1.2
NL-WP7x35	35	1.38	7	0.28	5.7	0.22	4.5*35	0.18*1.4
NL-WP8x40	40	1.57	8	0.31	5.9	0.23	5.0*40	0.2*1.6
NL-WP10x50	50	1.97	10	0.39	7.9	0.31	6.0*45	0.24*2
NL-WP12x60	60	2.36	12	0.47	11	0.43	8.0*60	0.31*2.4
NL-WP14x75	75	2.95	14	0.55	12	0.47	10.0*70	0.39*2.8



波纹管
Corrugated Tube

- 1、Features: smooth body without burr, good flexibility, anti-corrosion, waterproof and oilproof, high and low temperature resistant, insulation flame retardant(PA, PP).

2、Material: 100% new PE, PP, PA for chosen.


3、Color: Grey, Black, other colors are available as requested.

4、Usage: specially used for automobile wiring, and also used in machine tool, automatic instrumentation motors, to protect cables and wires from external force, and to resist abrasion and insulation.
- 1、特点：管身光滑无毛刺，柔韧性好，防腐、防水防油、耐高低温，绝缘阻燃（PA PP）。

2、材质：100%全新PE、PP、PA可选。

3、颜色：灰色、黑色，其他颜色可按要求定做。

4、用途：专用于汽车配线，也可用于机床、自动化仪表电机，保护电缆、电线不受外作用，耐磨、绝缘。

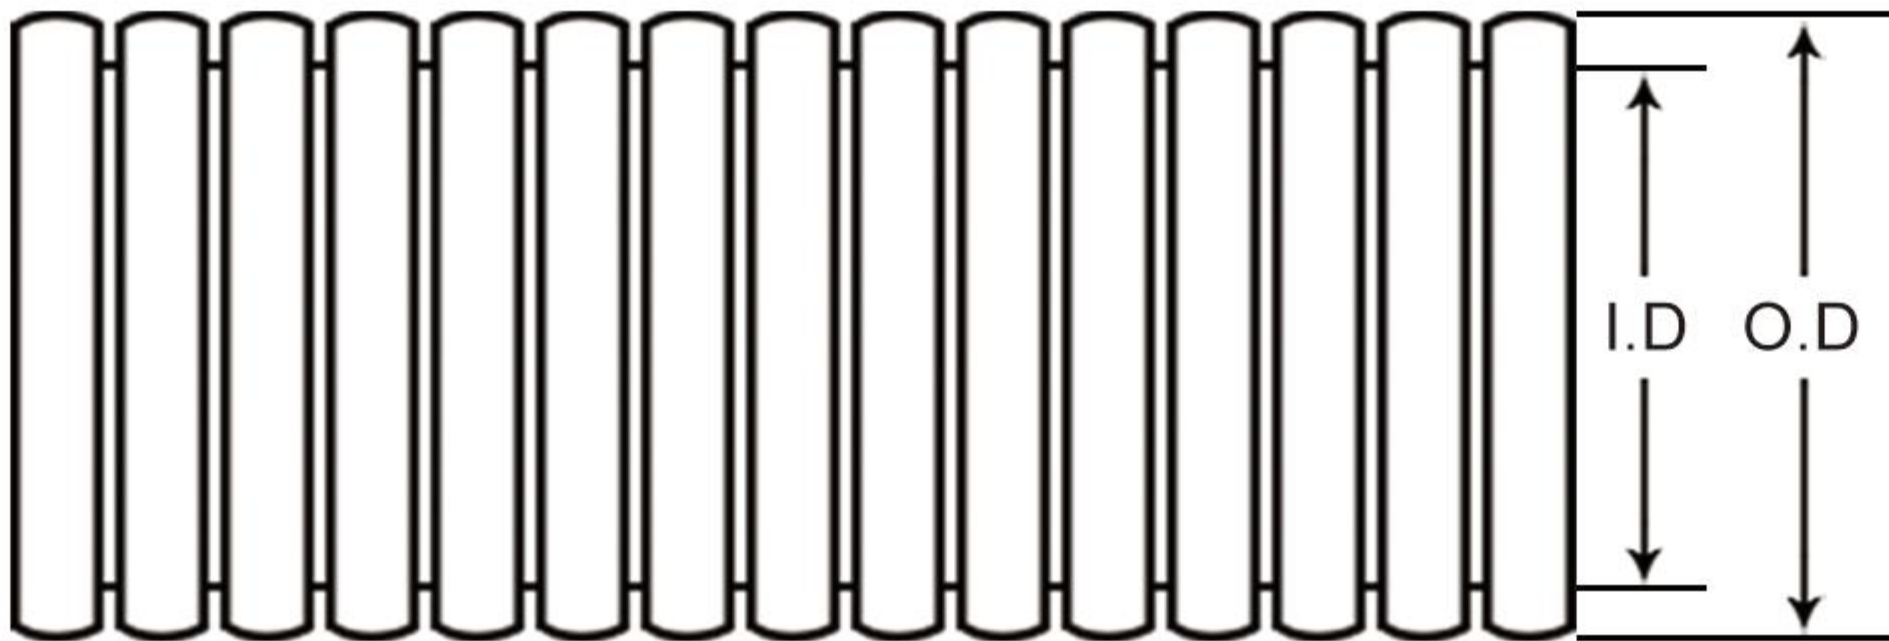


Item No.	Outer Diameter		Inner Diameter		Bending radius		Package
	mm	inch	mm	inch	mm	inch	meters/roll
NLCT-AD7.5	7.5	0.30	5.5	0.22	16	0.63	100
NLCT-AD10	10	0.39	6.5	0.26	16	0.63	100
NLCT-AD11.6	11.6	0.46	8	0.31	20	0.79	100
NLCT-AD13	13	0.51	10	0.39	20	0.79	100
NLCT-AD15.8	15.8	0.62	12	0.47	30	1.18	100
NLCT-AD18.5	18.5	0.73	14.3	0.56	40	1.57	100
NLCT-AD21.2	21.2	0.83	17	0.67	45	1.77	100
NLCT-AD25	25	0.98	20	0.79	45	1.77	100
NLCT-AD28.5	28.5	1.12	23	0.91	50	1.97	50
NLCT-AD34.5	34.5	1.36	29	1.14	60	2.36	50
NLCT-AD42.5	42.5	1.67	36	1.42	70	2.76	50
NLCT-AD54.5	54.5	2.15	48	1.89	90	3.54	25
NLCT-AD67.2	67.2	2.65	56	2.2	110	4.33	25
NLCT-AD80	80	3.15	69	2.72	140	5.51	25
NLCT-AD106	106	4.17	91	3.58	170	6.69	25

波纹管接头
Corrugated Tube Connector

- 1、Features: Used to connect the corrugated conduit with other device boxes, Anti-Acid, Anti-erosion, waterproof and dust-proof, not easy to get aging.
- 2、Material: 100% New fresh PA (PP can be customized).
- 3、Waterproof Rating: IP68.
- 4、Flammability: UL 94V-2.
- 5、Working temperature: -40°C to 100°C.
- 6、Color: Black, other colors are available as requested.

- 1、特性：用于连接波纹管与其他设备盒，防酸、防腐蚀、防水防尘、不易老化。
- 2、材质：100%全新PA（PP可定制）。
- 3、防水等级：IP68。
- 4、阻燃性：UL 94V-2。
- 5、工作温度：-40°C至100°C。
- 6、颜色：黑色，其他颜色可根据要求提供。

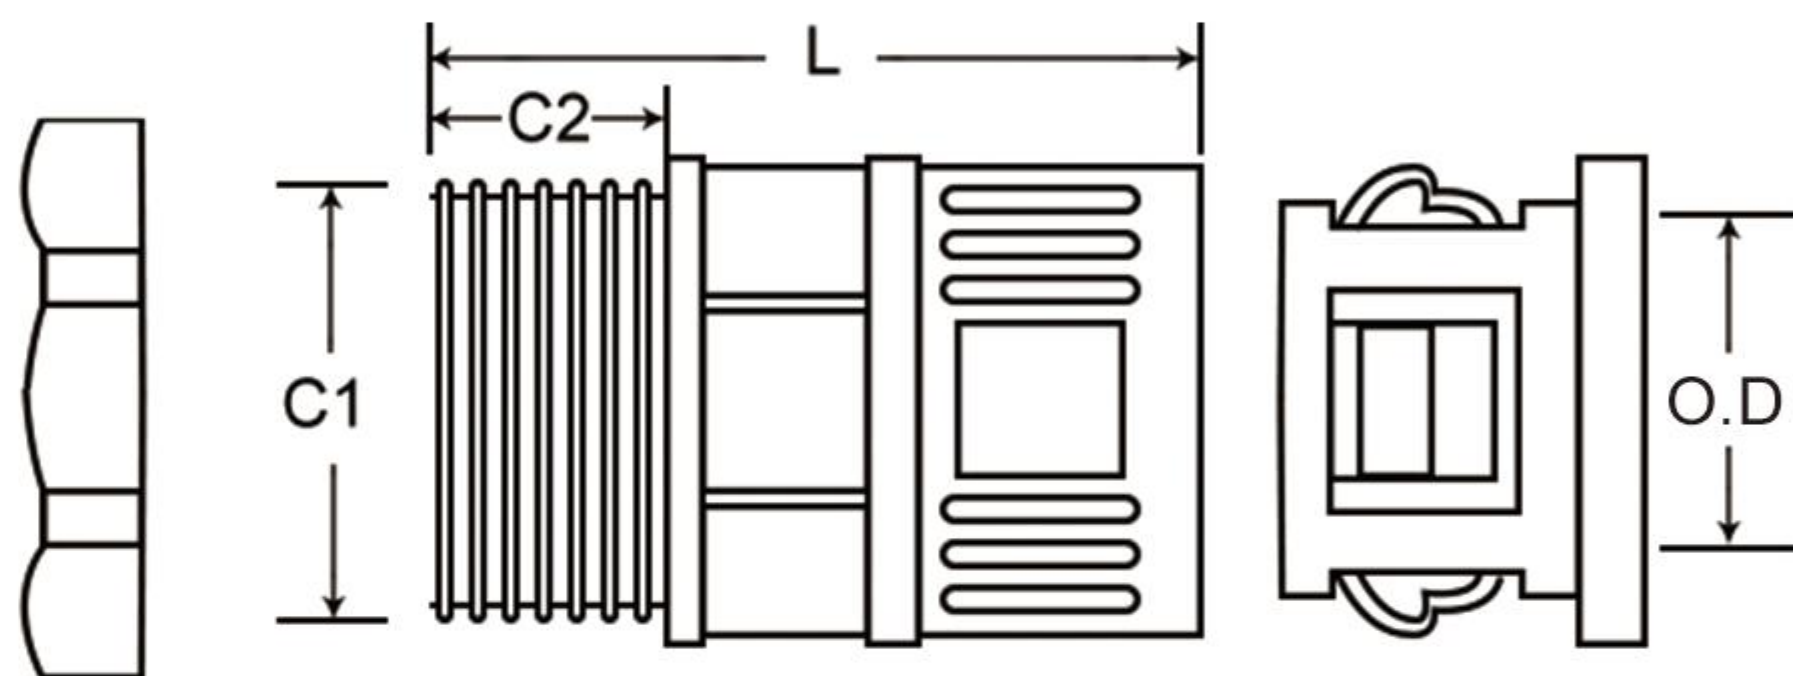

Suitable Pipe	Item No.	Thread O.D(C1)		Thread Length(C2)		Joint Length(L)	
		mm	inch	mm	inch	mm	inch
AD10.0	PG7	12.3	0.48	6.5	0.26	18	0.71
AD13.0	PG9	15	0.59	10	0.39	19	0.75
AD15.8	PG11	18.4	0.72	12.5	0.49	23	0.91
AD18.5	PG13.5	20.2	0.8	14.3	0.56	25	0.98
AD21.2	PG16	22.3	0.88	17	0.67	27	1.06
AD28.5	PG21	28	1.1	23	0.91	33	1.3
AD34.5	PG29	36.7	1.44	29	1.14	35	1.38
AD42.5	PG36	46.7	1.84	36	1.42	38.5	1.52
AD54.5	PG48	59	2.32	53	2.09	39	1.54
AD10.0	M12x1.5	12	0.47	6.5	0.26	22.5	0.89
AD13.0	M16x1.5	16	0.63	10	0.39	23	0.91
AD15.8	M16x1.5	18	0.71	12	0.47	24	0.94
AD18.5	M20x1.5	20	0.79	14.3	0.56	25.5	1
AD21.2	M24x1.5	24	0.94	17	0.67	27	1.06
AD25.0	M25x1.5	25	0.98	20	0.79	30	1.18
AD28.5	M27x1.5	27	1.06	23	0.91	34	1.34
AD34.5	M32x1.5	32	1.26	29	1.14	36	1.42
AD34.5	M36x1.5	36	1.42	29	1.14	36	1.42
AD34.5	M40x1.5	40	1.57	29	1.14	38.5	1.52
AD42.5	M48x1.5	48	1.89	36	1.42	38.5	1.52
AD54.5	M50x1.5	50	1.97	38	1.5	39	1.54
AD54.5	M60x1.5	60	2.36	53	2.09	39	1.54



螺旋缠绕管
Spiral Wrapping Bands


- 1、Features: smooth body without burr, flexible and firm, widely used in organizing and protecting cables, wires, etc.

2、Material: made of 100% brand new PE.

3、Color: White, Black, other colors are available as requested.
- 1、特点：光滑无毛刺，柔韧牢固，广泛用于整理保护电缆、电线等。

2、材质：采用 100% 全新 PE 制成。

3、颜色：白色、黑色，可根据要求提供其他颜色。

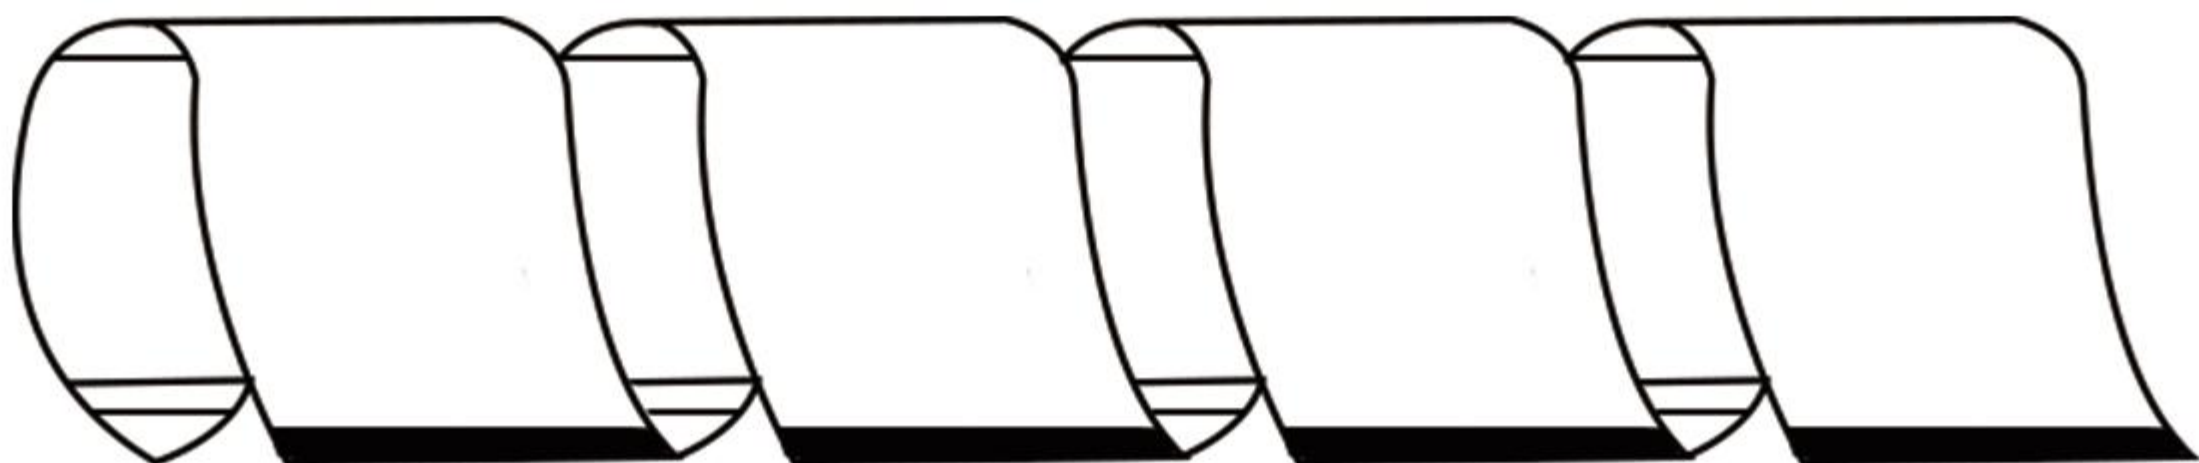

Item No.	Pitch		Outer Diameter		Inner Diameter		Wrapping range	
	mm	inch	mm	inch	mm	inch	mm	inch
NLWD-3	4	0.16	3	0.12	1.5	0.06	1.5-10	0.06-0.39
NLWD-4	4.5	0.18	4	0.16	2.5	0.10	2.5-20	0.1-0.78
NLWD-6	7	0.28	6	0.24	4	0.16	4-50	0.16-1.96
NLWD-8	10.8	0.43	8	0.31	6	0.24	6-60	0.24-2.36
NLWD-10	11.4	0.45	10	0.39	7.5	0.3	7.5-60	0.3-2.36
NLWD-12	13.9	0.55	12	0.47	9	0.35	9-65	0.35-2.55
NLWD-14	14.5	0.57	14	0.55	11	0.43	11-70	0.43-2.75
NLWD-15	15	0.59	15	0.59	12	0.47	12-75	0.47-2.95
NLWD-16	16	0.63	16	0.63	13	0.51	13-85	0.51-3.34
NLWD-18	17	0.67	18	0.71	14	0.55	14-90	0.55-3.54
NLWD-19	18.2	0.72	19	0.75	15	0.59	15-100	0.59-3.93
NLWD-20	18.5	0.73	20	0.79	17	0.67	17-105	0.67-4.13
NLWD-22	19	0.75	22	0.87	18	0.71	18-110	0.71-4.33
NLWD-24	19.6	0.77	24	0.94	20	0.79	20-130	0.79-5.11
NLWD-26	20	0.79	26	1.02	22	0.87	22-135	0.87-5.31
NLWD-28	28	1.1	28	1.1	24	0.94	24-140	0.94-5.51
NLWD-30	43	1.69	30	1.18	26	1.02	26-150	1.02-5.9

理线管
Cable Tidy Kit

- 1、 Features: Easier to install than normal wrapping band, smooth body without burr, flexible and firm, widely used in organizing and protecting cables, wires, etc.

2、 Material: made of 100% brand new PE.


3、 Color: White, Black, Grey, other colors are available as requested.

4、 Length: the length of one roll can be customized upon request, 1 meter to 100 meters, etc.
- 1、 特点：比普通缠绕管更易于安装，光滑无毛刺，柔韧牢固，广泛用于整理和保护电缆、电线等。


2、 材质：采用 100% 全新 PE 制成。

3、 颜色：白色、黑色、灰色，其他颜色可根据要求定制。

4、 长度：一卷长度可根据要求定制，如1 米至 100 米等。。

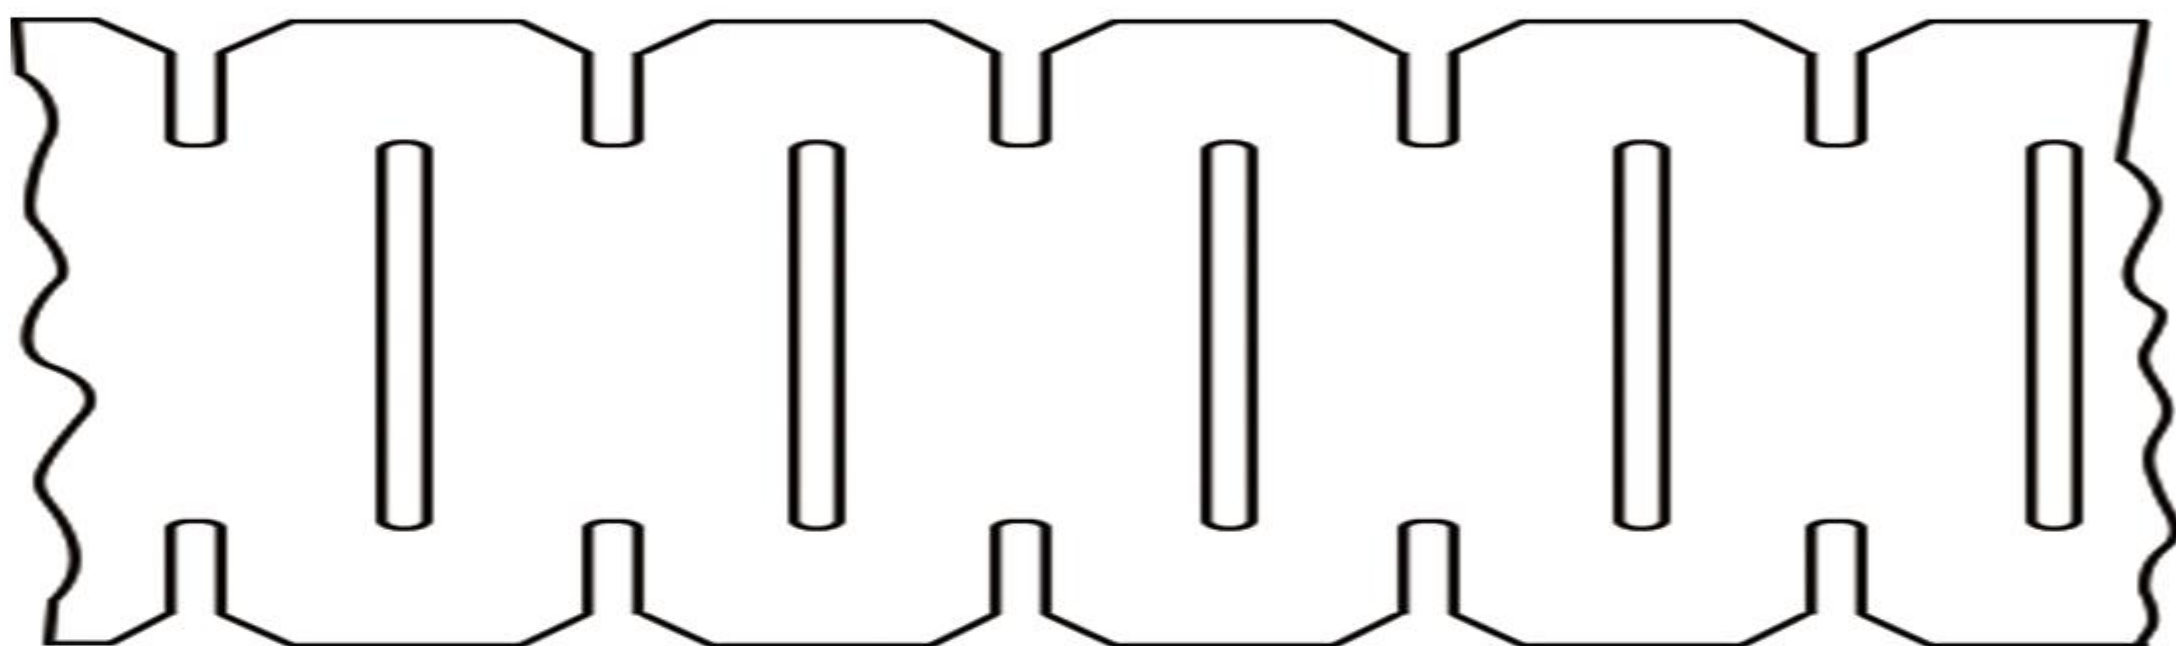

Item No.	Outer Diameter		Wrapping Range	
	mm	inch	mm	inch
NLCTK-8	8	0.31	6-9	0.24-0.35
NLCTK-10	10	0.39	7-11	0.28-0.43
NLCTK-16	16	0.63	13-17	0.51-0.67
NLCTK-22	22	0.87	19-24	0.75-0.94
NLCTK-28	28	1.10	25-30	0.99-1.18
NLCTK-32	32	1.26	29-34	1.14-1.33
NLCTK-42	42	1.65	38-44	1.50-1.73

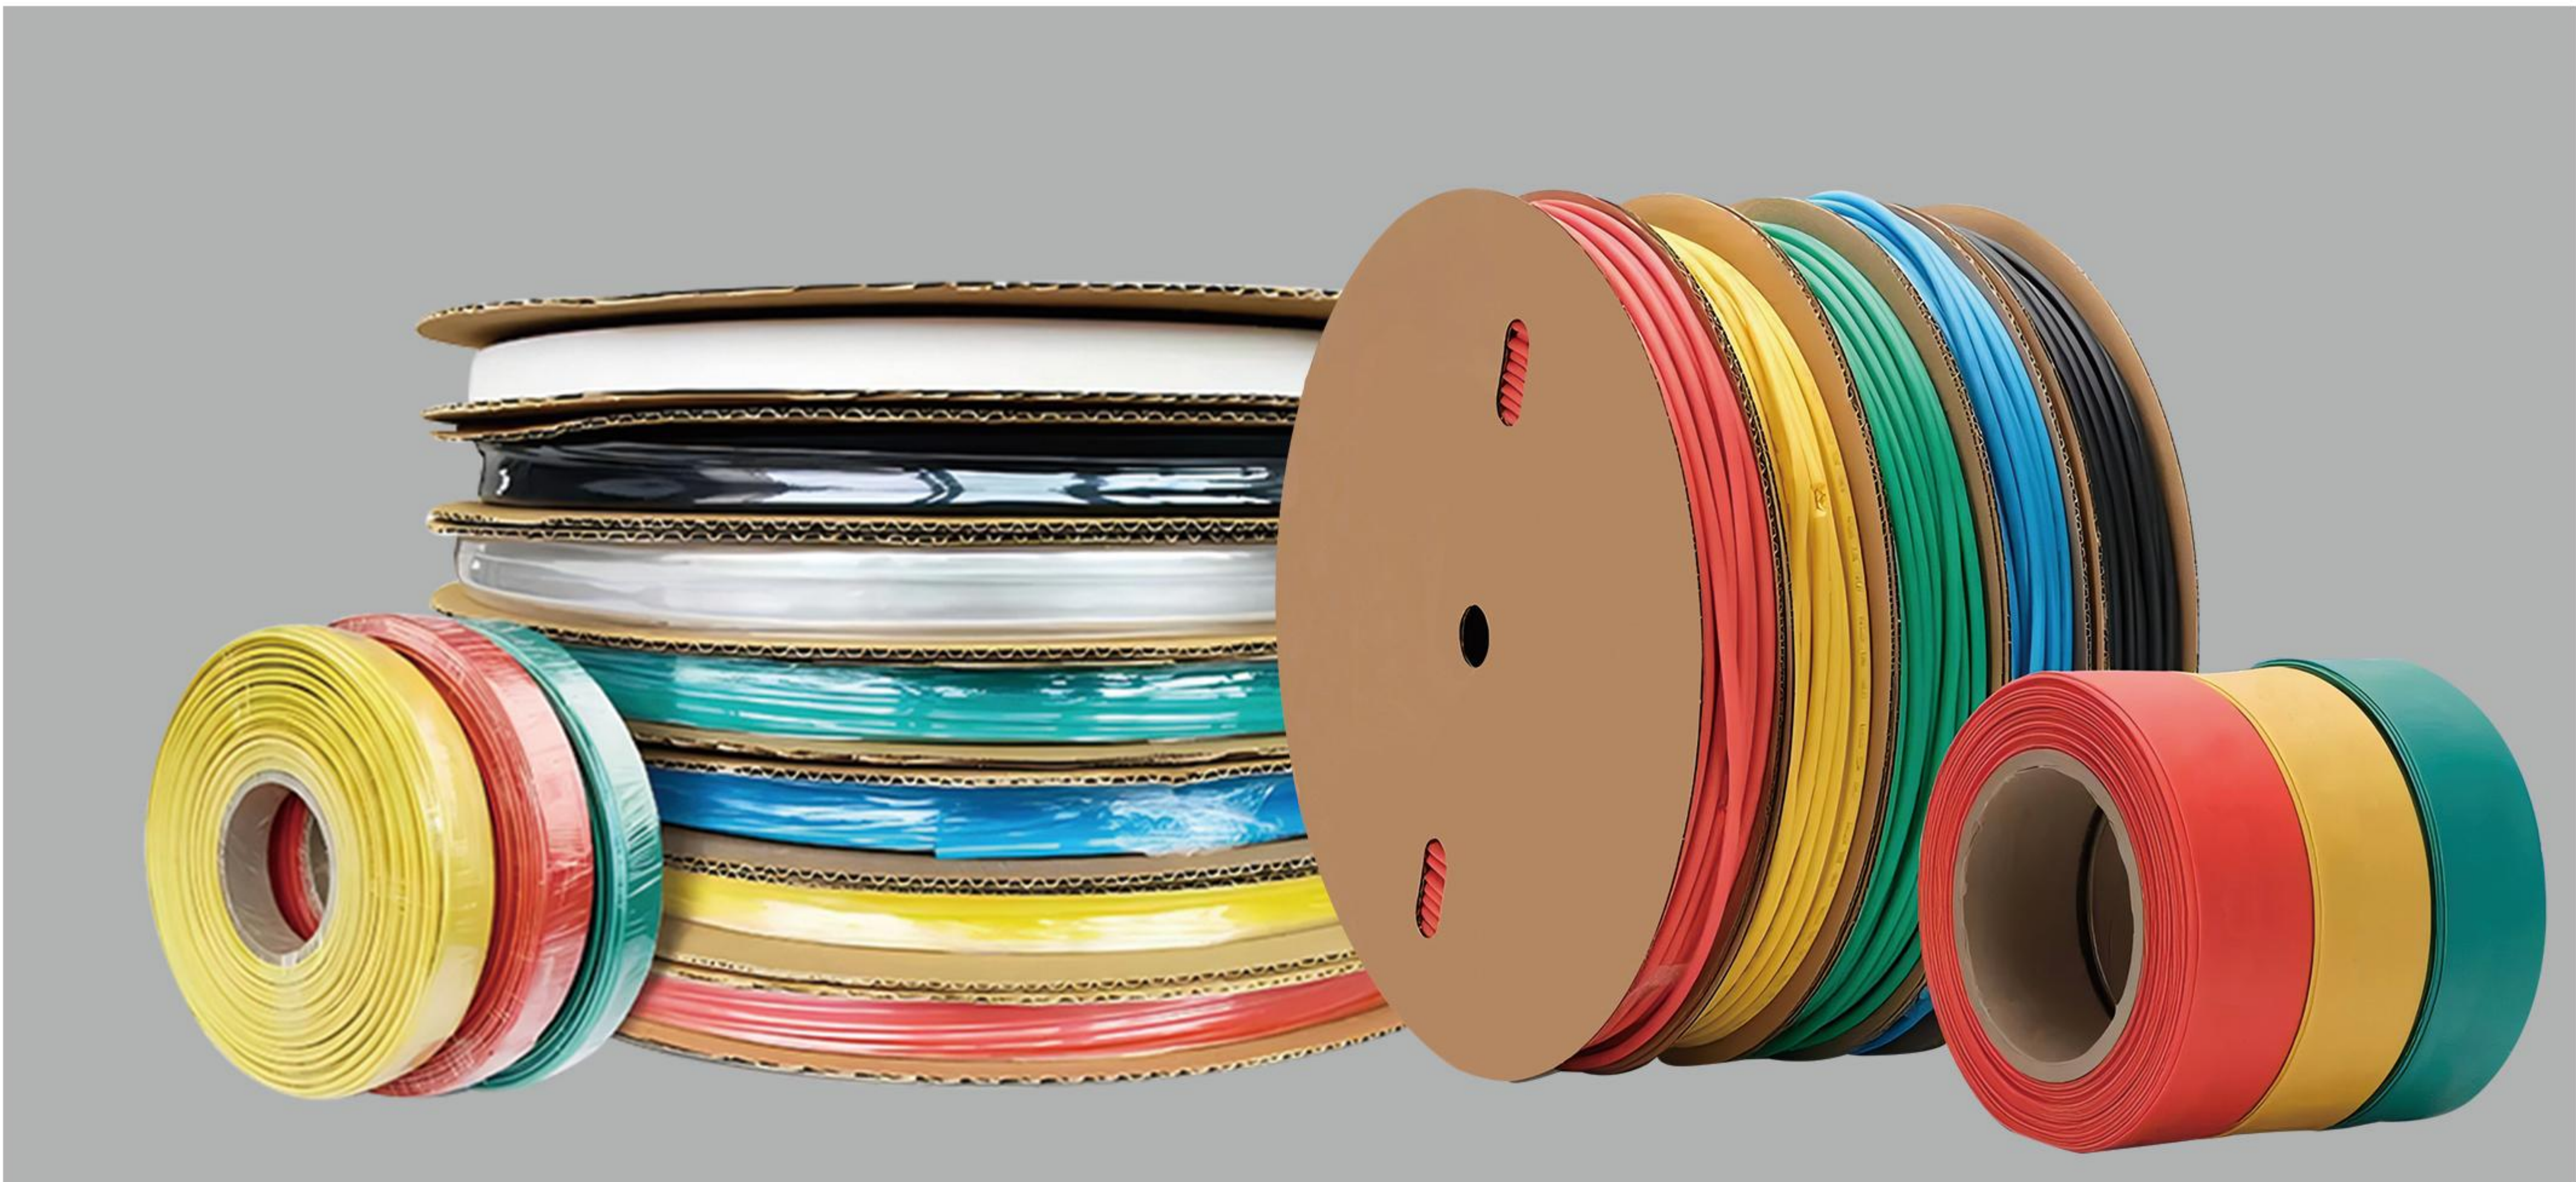

热缩管 Heat Shrink Tube

- 1、Features: Environmentally friendly, waterproof, insulation flame retardant, high and low temperature resistant, high toughness, anti-corrosion, long life.

2、Material: 100% new EVA (Ethylene Vinyl Acetate Copolymer).

3、Color: White, Black, Red, Yellow, Green, Blue, Transparent, Yellow&Green, other colors are available as requested.

4、Shrinkage rate: 2:1, 3:1, 4:1, etc.

5、Working temperature: -55 °C to 125 °C.

6、Usage: Widely used in the insulation protection of connectors, household appliances, wire ends, solder joint protection, wire marks, power equipment, communication equipment and other products, as well as corrosion and rust prevention of metal products.
- 1、特点：环保、防水、绝缘阻燃、耐高低温、高韧性、防腐、寿命长。

2、材质：100%全新EVA（乙烯-醋酸乙烯共聚物）。

3、颜色：白色、黑色、红色、黄色、绿色、蓝色、透明、黄绿，其他颜色可按要求 提供。

4、收缩率：2:1、3:1、4:1等。

5、工作温度：-55℃至125℃。

6、用途：广泛应用于连接器、家用电器、电线端部、焊点保护、电线标记、电力设备、通讯设备等产品的绝缘保护，以及金属制品的防腐防锈。

3:1

Size	As Supplied	After Recovered		Standard Package
mm	Internal Diameter （mm）	Internal Diameter Max （mm）	Wall Thickness Nom （mm）	m/roll
φ1.6	1.60	0.50	0.45±0.10	200
φ3.2	3.20	1.00	0.55±0.10	200
φ4.8	4.80	1.50	0.60±0.10	100
φ6.4	6.40	2.00	0.65±0.10	100
φ9.5	9.50	3.00	0.75±0.15	50
φ12.7	12.70	4.00	0.75±0.15	50
φ15.0	15.00	5.00	0.80±0.15	50
φ19.1	19.10	6.00	0.85±0.15	50
φ25.4	25.40	8.00	1.00±0.20	25
φ30.0	30.00	10.00	1.15±0.20	25
φ39.0	39.00	13.00	1.50±0.20	25

2:1

Size	As Supplied	After Recovered		Standard Package
mm	Internal Diameter (mm)	Internal Diameter Max (mm)	Wall Thickness Nom (mm)	m/roll
φ0.8	1.10±0.20	0.50	0.22±0.05	200
φ1.0	1.50±0.20	0.65	0.28	200
φ1.5	2.00±0.20	0.85	0.32	200
φ2.0	2.50±0.20	1.00	0.35	200
φ2.5	3.00±0.20	1.30	0.38	200
φ3.0	3.50±0.20	1.50	0.40	200
φ3.5	4.00±0.20	1.80	0.42	200
φ4.0	4.50±0.20	2.00	0.45	200
φ4.5	5.00±0.20	2.30	0.50	200
φ5.0	5.50±0.20	2.50	0.55	100
φ6.0	6.50±0.20	3.00	0.55	100
φ7.0	7.50±0.20	3.50	0.55	100
φ8.0	8.50±0.30	4.00	0.60	100
φ9.0	9.50±0.30	4.50	0.60	100
φ10.0	10.50±0.30	5.00	0.60	100
φ11.0	11.50±0.30	5.50	0.60	100
φ12.0	12.50±0.30	6.00	0.60	100
φ13.0	13.50±0.30	6.50	0.65	100
φ14.0	14.50±0.30	7.00	0.65	100
φ15.0	15.50±0.40	7.50	0.70	100
φ16.0	16.50±0.40	8.00	0.70	100
φ17.0	17.50±0.40	8.50	0.70	100
φ18.0	19.00±0.50	9.00	0.80	100
φ20.0	21.00±0.50	10.00	0.80	100
φ22.0	23.00±0.50	11.00	0.80	100
φ25.0	26.00±0.50	12.50	0.90	50
φ28.0	29.00±0.50	14.00	0.90	50
φ30.0	31.50±1.00	15.00	0.95	50
φ35.0	36.50±1.00	17.50	1.00	50
φ40.0	41.50±1.00	20.00	1.00	25
φ45.0	46.50±1.00	22.50	1.00	25
φ50.0	≥50.00	25.00	1.00	25
φ60.0	≥60.00	30.00	1.30	25
φ70.0	≥70.00	35.00	1.30	25
φ80.0	≥80.00	40.00	1.30	25
φ90.0	≥90.00	45.00	1.46	25
φ100.0	≥100.00	50.00	1.46	25
φ120.0	≥120.00	60.00	1.56	25
φ150.0	≥1500.00	75.00	1.56	25
φ180.0	≥180.00	90.00	1.56	25

防水盒（未开孔型） Waterproof Junction Box Without Hole


- 1、Material: Box made of ABS and Plug made of PVC;

2、Advantages: Compared with metal junction box,the ABS boxes are more insulative,waterproof and never be rusting;

3、Installation methods: The box can be directly fixed on the wall or other flat boards with nails via screw holes; there is convex base for Internal wiring, mounting circuit board or DIN rail; Outlet hole can be used at the reserved position. It is best to fix cables with glands for better water impervious and stability.
- 1、材质：盒体为ABS，胶塞为PVC；

2、优点：与金属接线盒相比，ABS接线盒绝缘性更好，防水性更好，永不生锈；

3、安装方式：可直接通过螺丝孔用螺钉固定在墙面或其他平板上；有凸台可供内部 布线，安装电路板或DIN导轨；预留位置可制作出线孔，最好用防水接头固定线缆，防水性能好，稳定性好。

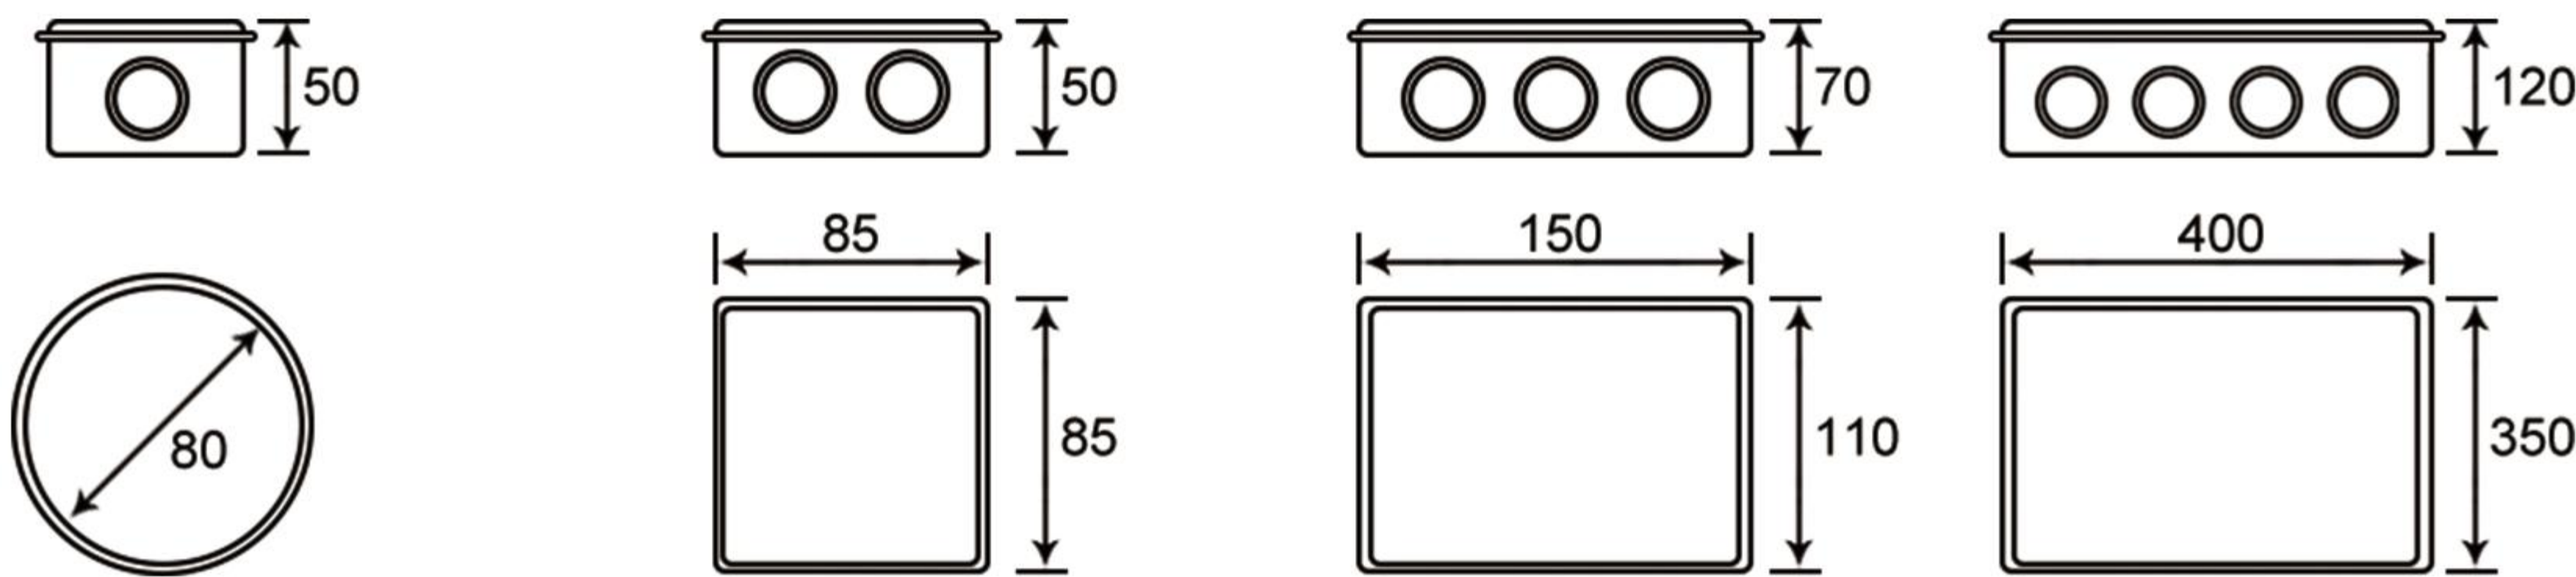

Item.No	IP Rating	Holes		Length	Width	Height	Remarks
		Qty	O.D(mm)	mm	mm	mm	
NLJC-50x50	IP55	4	25	50	50	/	Cylinder
NLJC-80x50	IP55	4	25	80	50	/	
NLJC-85x85x50	IP55	7	25	85	85	50	Cuboid
NLJC-100x100x70	IP65	7	25	100	100	70	
NLJC-150x110x70	IP65	10	25	150	110	70	
NLJC-150x150x70	IP65	8	25	150	150	70	
NLJC-200x100x70	IP65	8	25	200	100	70	
NLJC-200x155x80	IP65	10	36	200	155	80	
NLJC-200x200x80	IP65	12	36	200	200	80	
NLJC-255x200x80	IP65	12	36	255	200	80	
NLJC-255x200x120	IP65	12	36	255	200	120	
NLJC-300x250x120	IP65	12	36	300	250	120	
NLJC-400x350x120	IP65	16	36	400	350	120	

防水盒（开孔型）
Waterproof Junction Box With Hole


- 1、Material: Box made of ABS and Plug made of PVC;

2、Advantages: Compared with metal junction box,the ABS boxes are more insulative,waterproof and never be rusting;

3、Installation methods: The box can be directly fixed on the wall or other flat boards with nails via screw holes; there is convex base for Internal wiring, mounting circuit board or DIN rail; Outlet hole can be used at the reserved position. It is best to fix cables with glands for better water impervious and stability.
- 1、材质：盒体为ABS，胶塞为PVC；

2、优点：与金属接线盒相比，ABS接线盒绝缘性更好，防水性更好，永不生锈；

3、安装方式：可直接通过螺丝孔用螺钉固定在墙面或其他平板上；有凸台可供内部 布线，安装电路板或DIN导轨；预留位置可制作出线孔，最好用防水接头固定线缆，防水性能好，稳定性好。

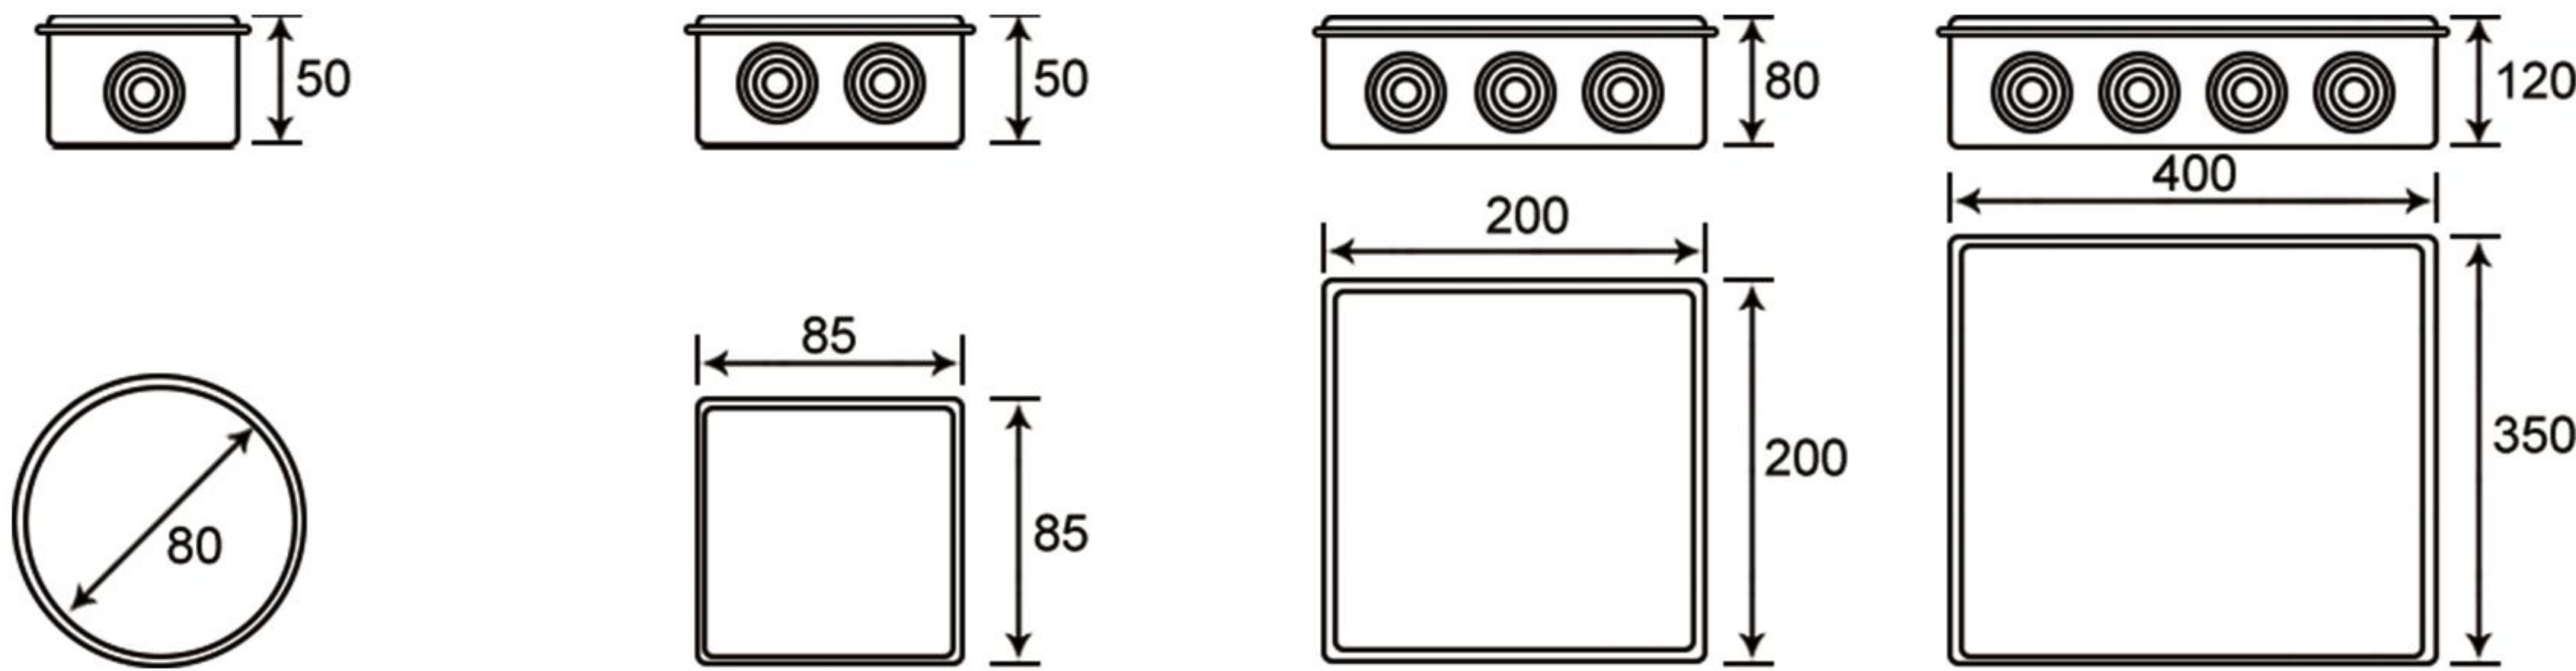

Item.No	IP Rating	Holes		Length	Width	Height	Remarks
		Qty	O.D(mm)	mm	mm	mm	
NLJD-50x50	IP55	4	25	50	50	/	Cylinder
NLJD-80x50	IP55	4	25	80	50	/	
NLJD-85x85x50	IP55	7	25	85	85	50	Cuboid
NLJD-100x100x70	IP65	7	25	100	100	70	
NLJD-150x110x70	IP65	10	25	150	110	70	
NLJD-150x150x70	IP65	8	25	150	150	70	
NLJD-200x100x70	IP65	8	25	200	100	70	
NLJD-200x155x80	IP65	10	36	200	155	80	
NLJD-200x200x80	IP65	12	36	200	200	80	
NLJD-255x200x80	IP65	12	36	255	200	80	
NLJD-255x200x120	IP65	12	36	255	200	120	
NLJD-300x250x120	IP65	12	36	300	250	120	
NLJD-400x350x120	IP65	16	36	400	350	120	

扎带固定插销

Cable Tie Mount Screw



- 1、Features: corrosion-resistant, anti-aging, anti-skid design, strong and not easy to break.

2、Material: UL approved nylon PA66.

3、Color: White, Black, other colors are available as requested.
- 1、特点：耐腐蚀、抗老化、防滑设计、坚固不易断裂。

2、材质：UL认可的尼龙PA66。

3、颜色：白色、黑色，其他颜色可根据要求定制。

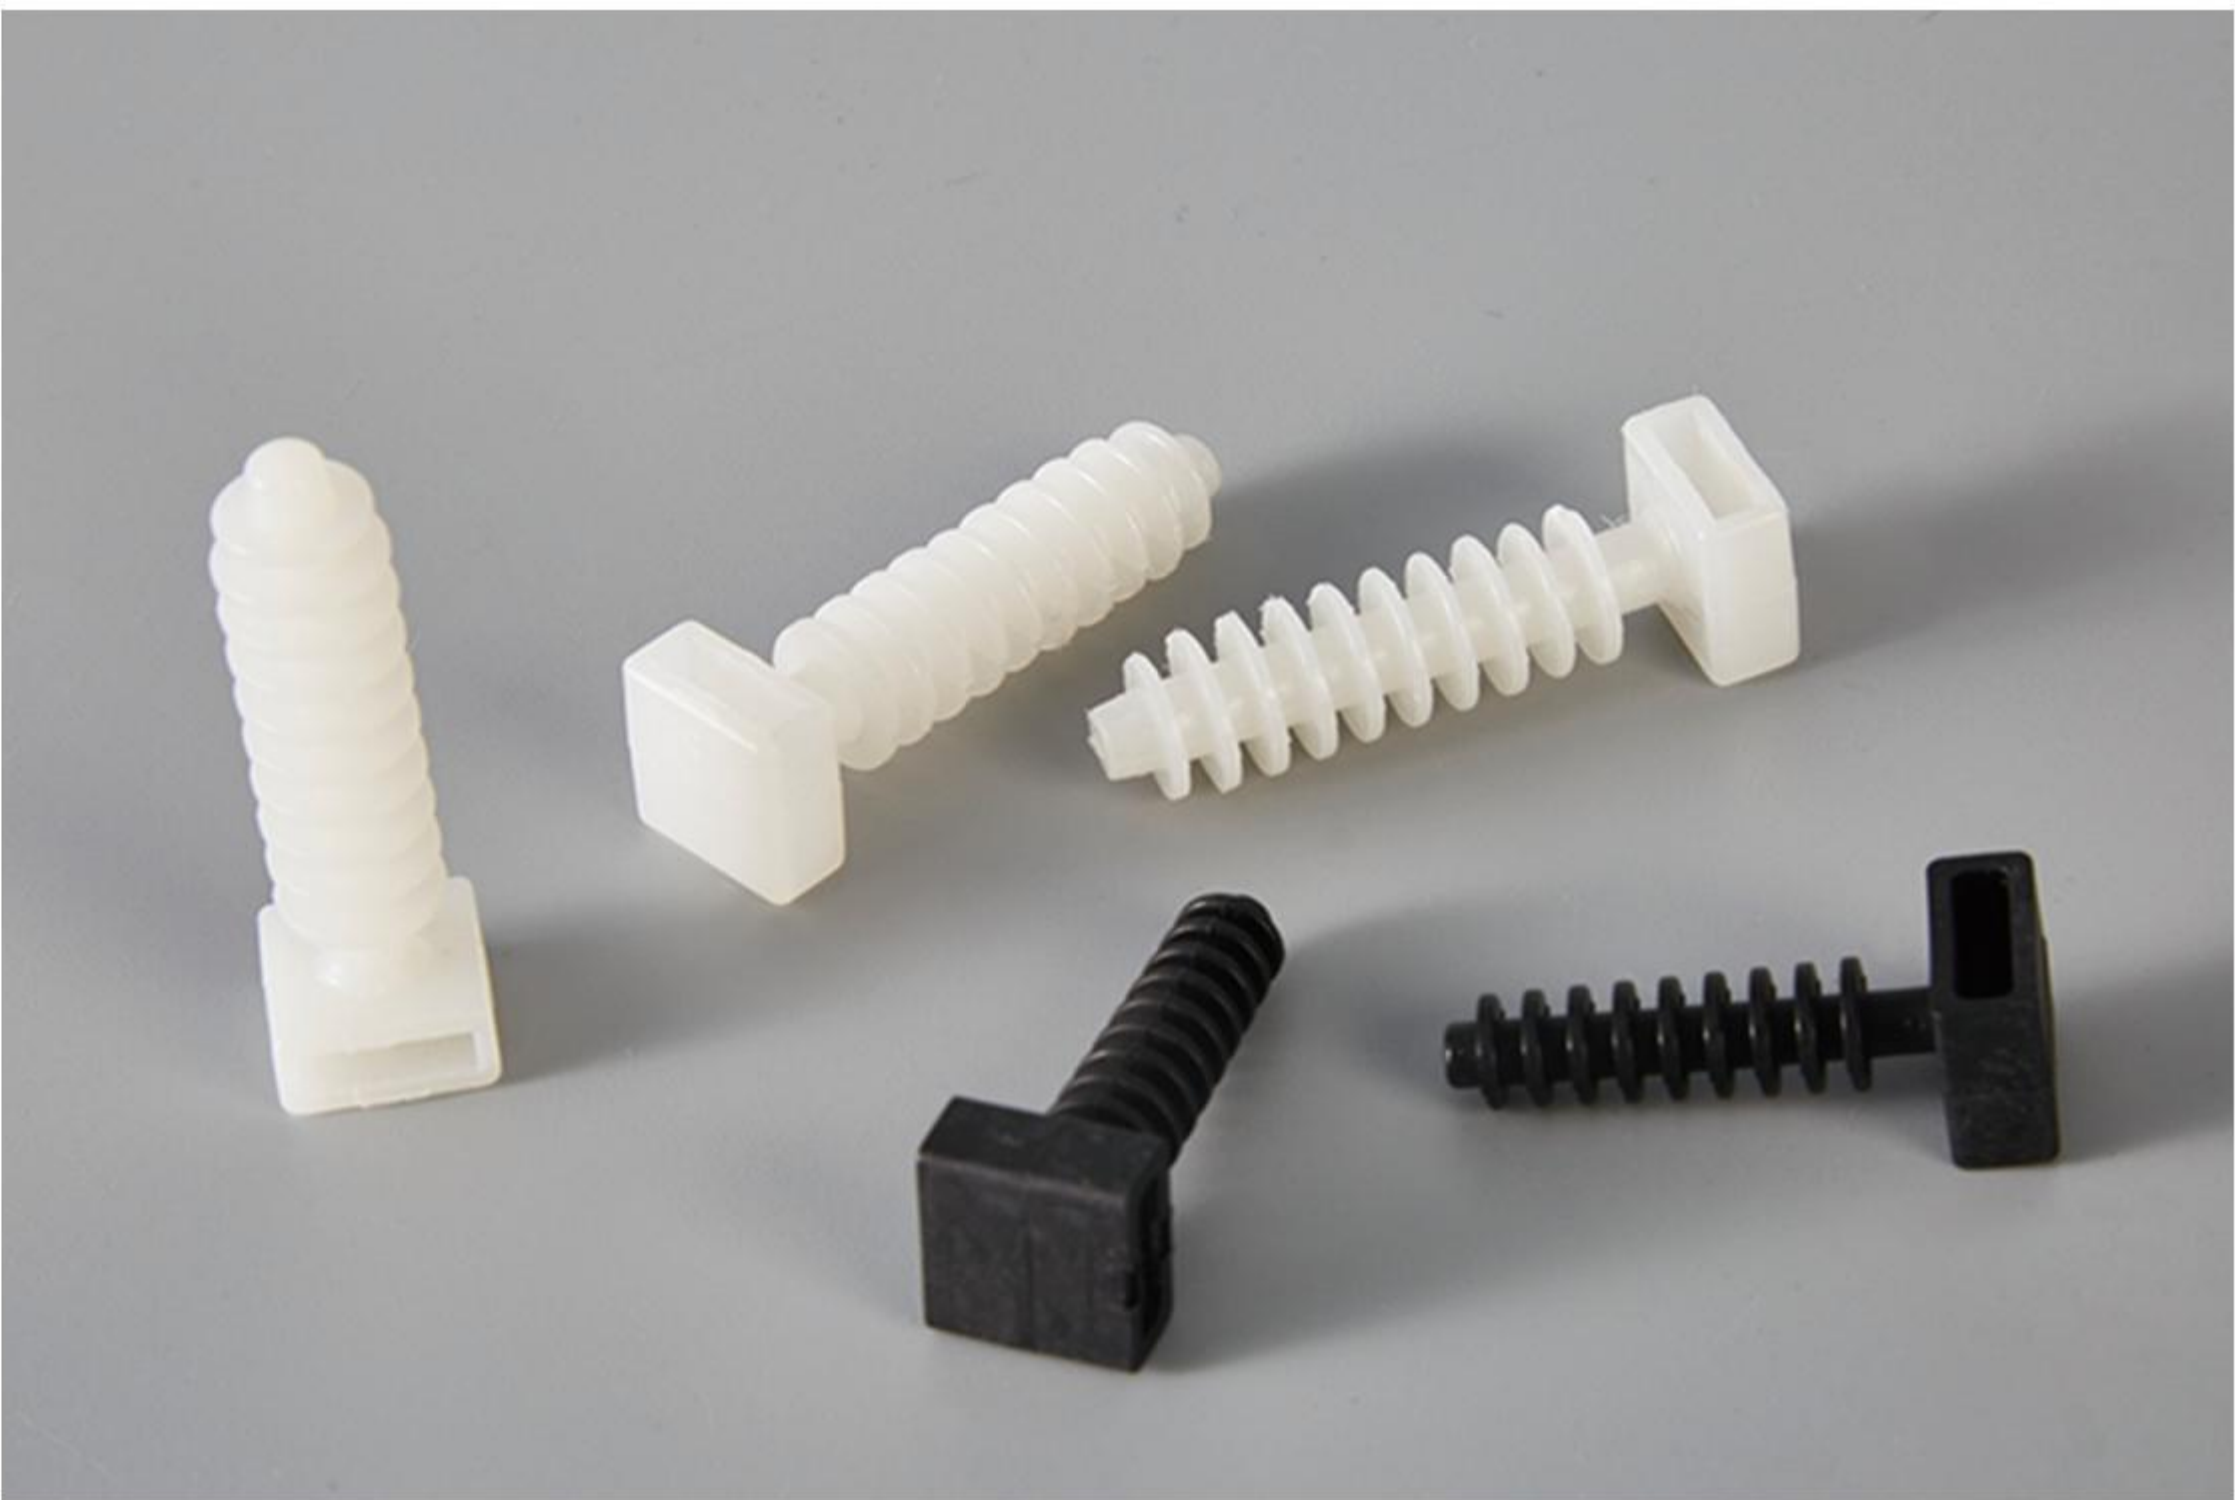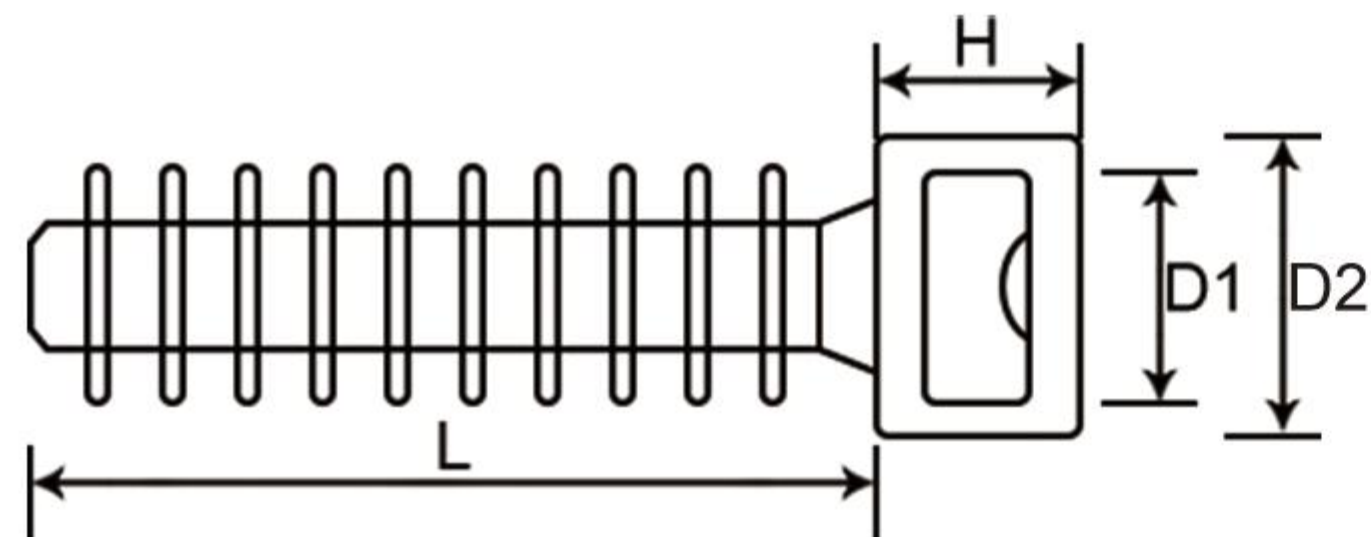

Item No.	Head height(H)		Length(L)		Head Width(D1)		Hole Width(D2)		Max Diameter(D)	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
NLMS-06	6	0.24	31	1.22	9.7	0.38	12.7	0.50	7.3	0.29
NLMS-08	6	0.24	37	1.46	9.7	0.38	12.7	0.50	9.5	0.37

自粘式扎带固定座

Adhesive Cable Tie Base


- 1、Features: strong stickiness, no need to staple, environmental protection, widely used.

2、Material: body is made of PE or PA, glue is normal or 3M adhesive.

3、Color: White, Black, other colors are available as requested.
- 1、特点：粘性强，无需螺丝，环保，用途广泛。

2、材质：主体由PE或PA制成，胶水为普通胶或3M胶。

3、颜色：白色，黑色，可根据要求定制其他颜色。

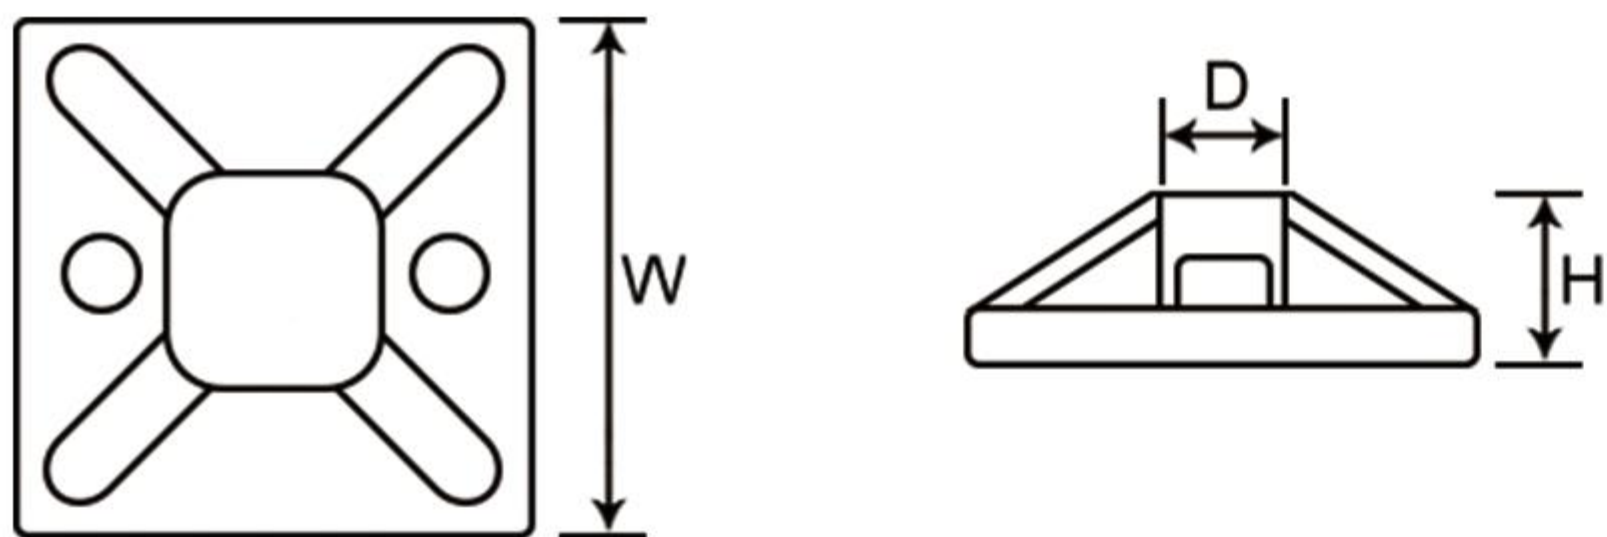

Item No.	Width(W)		Height(H)		Hole Width(D)	
	mm	inch	mm	inch	mm	inch
NLTM-20x20	20	0.79	6.4	0.25	5.7	0.22
NLTM-25x25	25	0.98	6.9	0.27	7.6	0.3
NLTM-30x30	30	1.18	7.4	0.29	9	0.35
NLTM-40x40	40	1.57	7.9	0.31	12.3	0.48
NLTM-50x50	50	1.97	6.6	0.26	24	0.94

线夹
Cable Clamp


- 1、Features: smooth body without burr, easy to install, durable and firm, anti-acid, anti-alkali , long using life.

2、Material: 100% new fresh PE or PA.

3、Color: White, Black, other colors are available as requested.
- 1、特点：光滑无毛刺，安装方便，坚固耐用，耐酸碱，使用寿命长。

2、材质：100%全新PE或PA。

3、颜色：白色，黑色，可根据要求定制其他颜色。

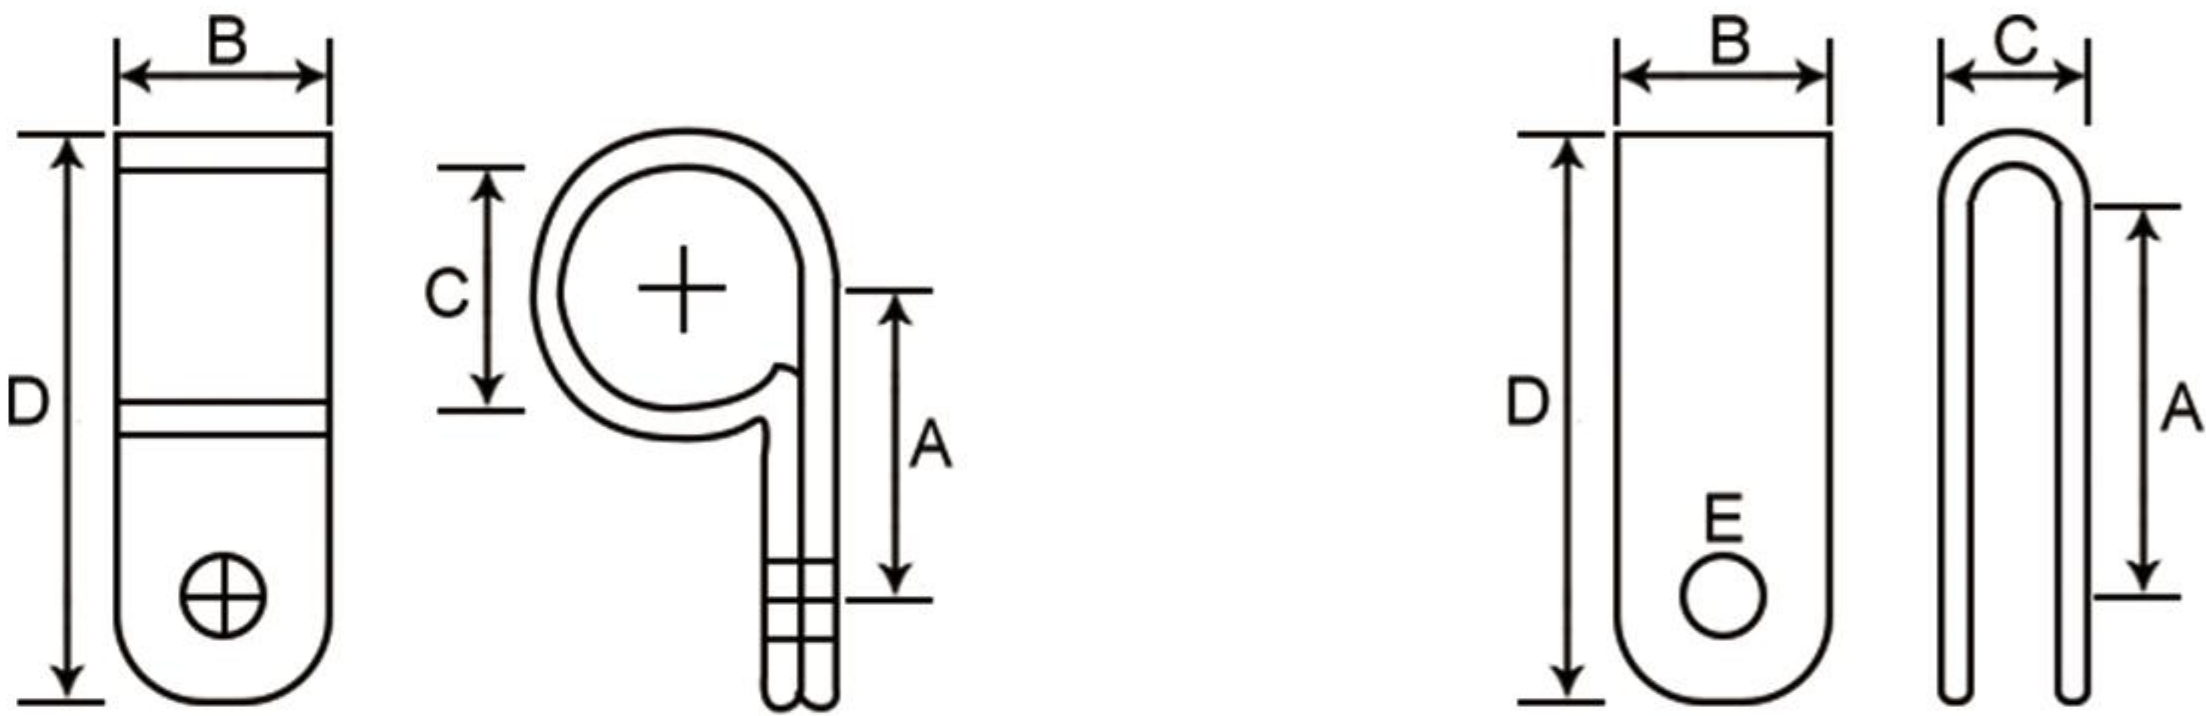

Item No.	Hole distance(A)		Width(B)		C		Lenght(D)		Mount hole dia.(E)	
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
NLCR-1/8	9.5	0.37	9	0.35	3.3	0.13	17	0.67	4	0.16
NLCR-3/16	11.3	0.44	9.5	0.37	5.5	0.22	18.5	0.73	4	0.16
NLCR-1/4	11.5	0.45	9.5	0.37	6.5	0.26	21	0.83	4.3	0.17
NLCR-5/16	11.5	0.45	9.5	0.37	8.5	0.33	21.7	0.85	4	0.16
NLCR-3/8	12.5	0.49	9.5	0.37	10.4	0.41	24	0.94	4.4	0.17
NLCR-1/2	14.5	0.57	9.5	0.37	12	0.47	25.5	1	4.3	0.17
NLCR-5/8	17	0.67	9.5	0.37	14	0.55	30.5	1.2	4	0.16
NLCR-3/4	19.5	0.77	12	0.47	19	0.75	35.5	1.4	4.7	0.19
NLCR-1	23	0.91	13	0.51	23	0.91	44	1.73	4.9	0.19
NLCR-1-3/16	23	0.91	12.5	0.49	30	1.18	47	1.85	5	0.2
NLCR-2	38	1.5	12.5	0.49	50	1.97	72	2.83	5	0.2
NLCU-1/8	8.2	0.32	9.5	0.37	3.2	0.13	17.5	0.69	5	0.2
NLCU-3/16	10.5	0.41	9.5	0.37	4.8	0.19	19	0.75	5	0.2
NLCU-1/4	10.1	0.4	10	0.39	6.4	0.25	20	0.79	5	0.2
NLCU-5/16	11.5	0.45	10	0.39	7.9	0.31	22.5	0.89	5	0.2
NLCU-3/8	12.3	0.48	12	0.47	9.5	0.37	24.7	0.97	5	0.2
NLCU-1/2	16.1	0.63	12	0.47	12.7	0.5	31.5	1.24	5	0.2
NLCU-5/8	18.3	0.72	12	0.47	15.8	0.62	33	1.3	5	0.2
NLCU-3/4	20.3	0.8	12	0.47	19.4	0.76	38.5	1.52	5	0.2
NLCU-1 1/2	35.5	1.4	12	0.47	36.7	1.44	91	3.58	5	0.2



瓷砖找平器
Tile Levelers

- 1、Features: Environmental protection, non-toxic, high toughness smooth body without burr, easy to install, long using life.

2、Material: 100% new fresh PE.

3、Color: White, Green, Red, Yellow, other colors are available as requested.
- 1、特点：环保、无毒、韧性强、光滑无毛刺、安装简便、使用寿命长。

2、材质：100%全新PE。

3、颜色：白色、绿色、红色、黄色，其他颜色可根据要求定制。



Item No.	Specification	Use Range	High(H)	Wide(W)	Thick(T1)	Thick(T2)
	mm	mm	mm	mm	mm	mm
Large Push-in Type Leveler 2-1.0	2-1.0	5-14	40.5	37	1	2.5
Large Push-in Type Leveler 2-1.5	2-1.5	5-14	40.5	37	1.5	2.5
Large Push-in Type Leveler 2-2.0	2-2.0	5-14	40.5	37	2	2.5
Large Push-in Type Leveler 2-3.0	2-3.0	5-14	40.5	37	3	2.5
Large Push-in Type Leveler 2-1.5	2-1.5	12-20	50	36	1.5	2.5




Item No.	Specification	Use Range	High(H)	Wide(W)	Thick(T1)
	mm	mm	mm	mm	mm
Nut Leveler 6-2-1.0(Cross type)	6-2-1.0	4-21	62	40	1
Nut Leveler 6-2-1.5(Cross type)	6-2-1.5	4-21	62	40	1.5
Nut Leveler 6-2-2.0(Cross type)	6-2-2.0	4-21	62	40	2
Nut Leveler 6-2-1.0(One-character model)	6-2-1.0	4-21	62	40	1
Nut Leveler 6-2-1.5(One-character model)	6-2-1.5	4-21	62	40	1.5
Nut Leveler 6-2-2.0(One-character model)	6-2-2.0	4-21	62	40	2

Tile Leveling System

- 1、Features: Environmental protection, non-toxic, high toughness smooth body without burr, easy to install, long using life.
- 2、Style: Push-in type.
- 3、Material: Pure new material PE.
- 4、Function: Universal insert.
- 5、Color: White, Green, Red, Yellow, other colors are available as requested.
- 6、Tile size: Most tiles.

- 1、特点：环保、无毒、韧性强、光滑无毛刺、安装简便、使用寿命长。
- 2、样式：插入式。
- 3、材料：纯新材料PE。
- 4、功能：万能插入。
- 5、颜色：白色、绿色、红色、黄色，其他颜色可根据要求定制。
- 6、瓷砖大小：大多数瓷砖。

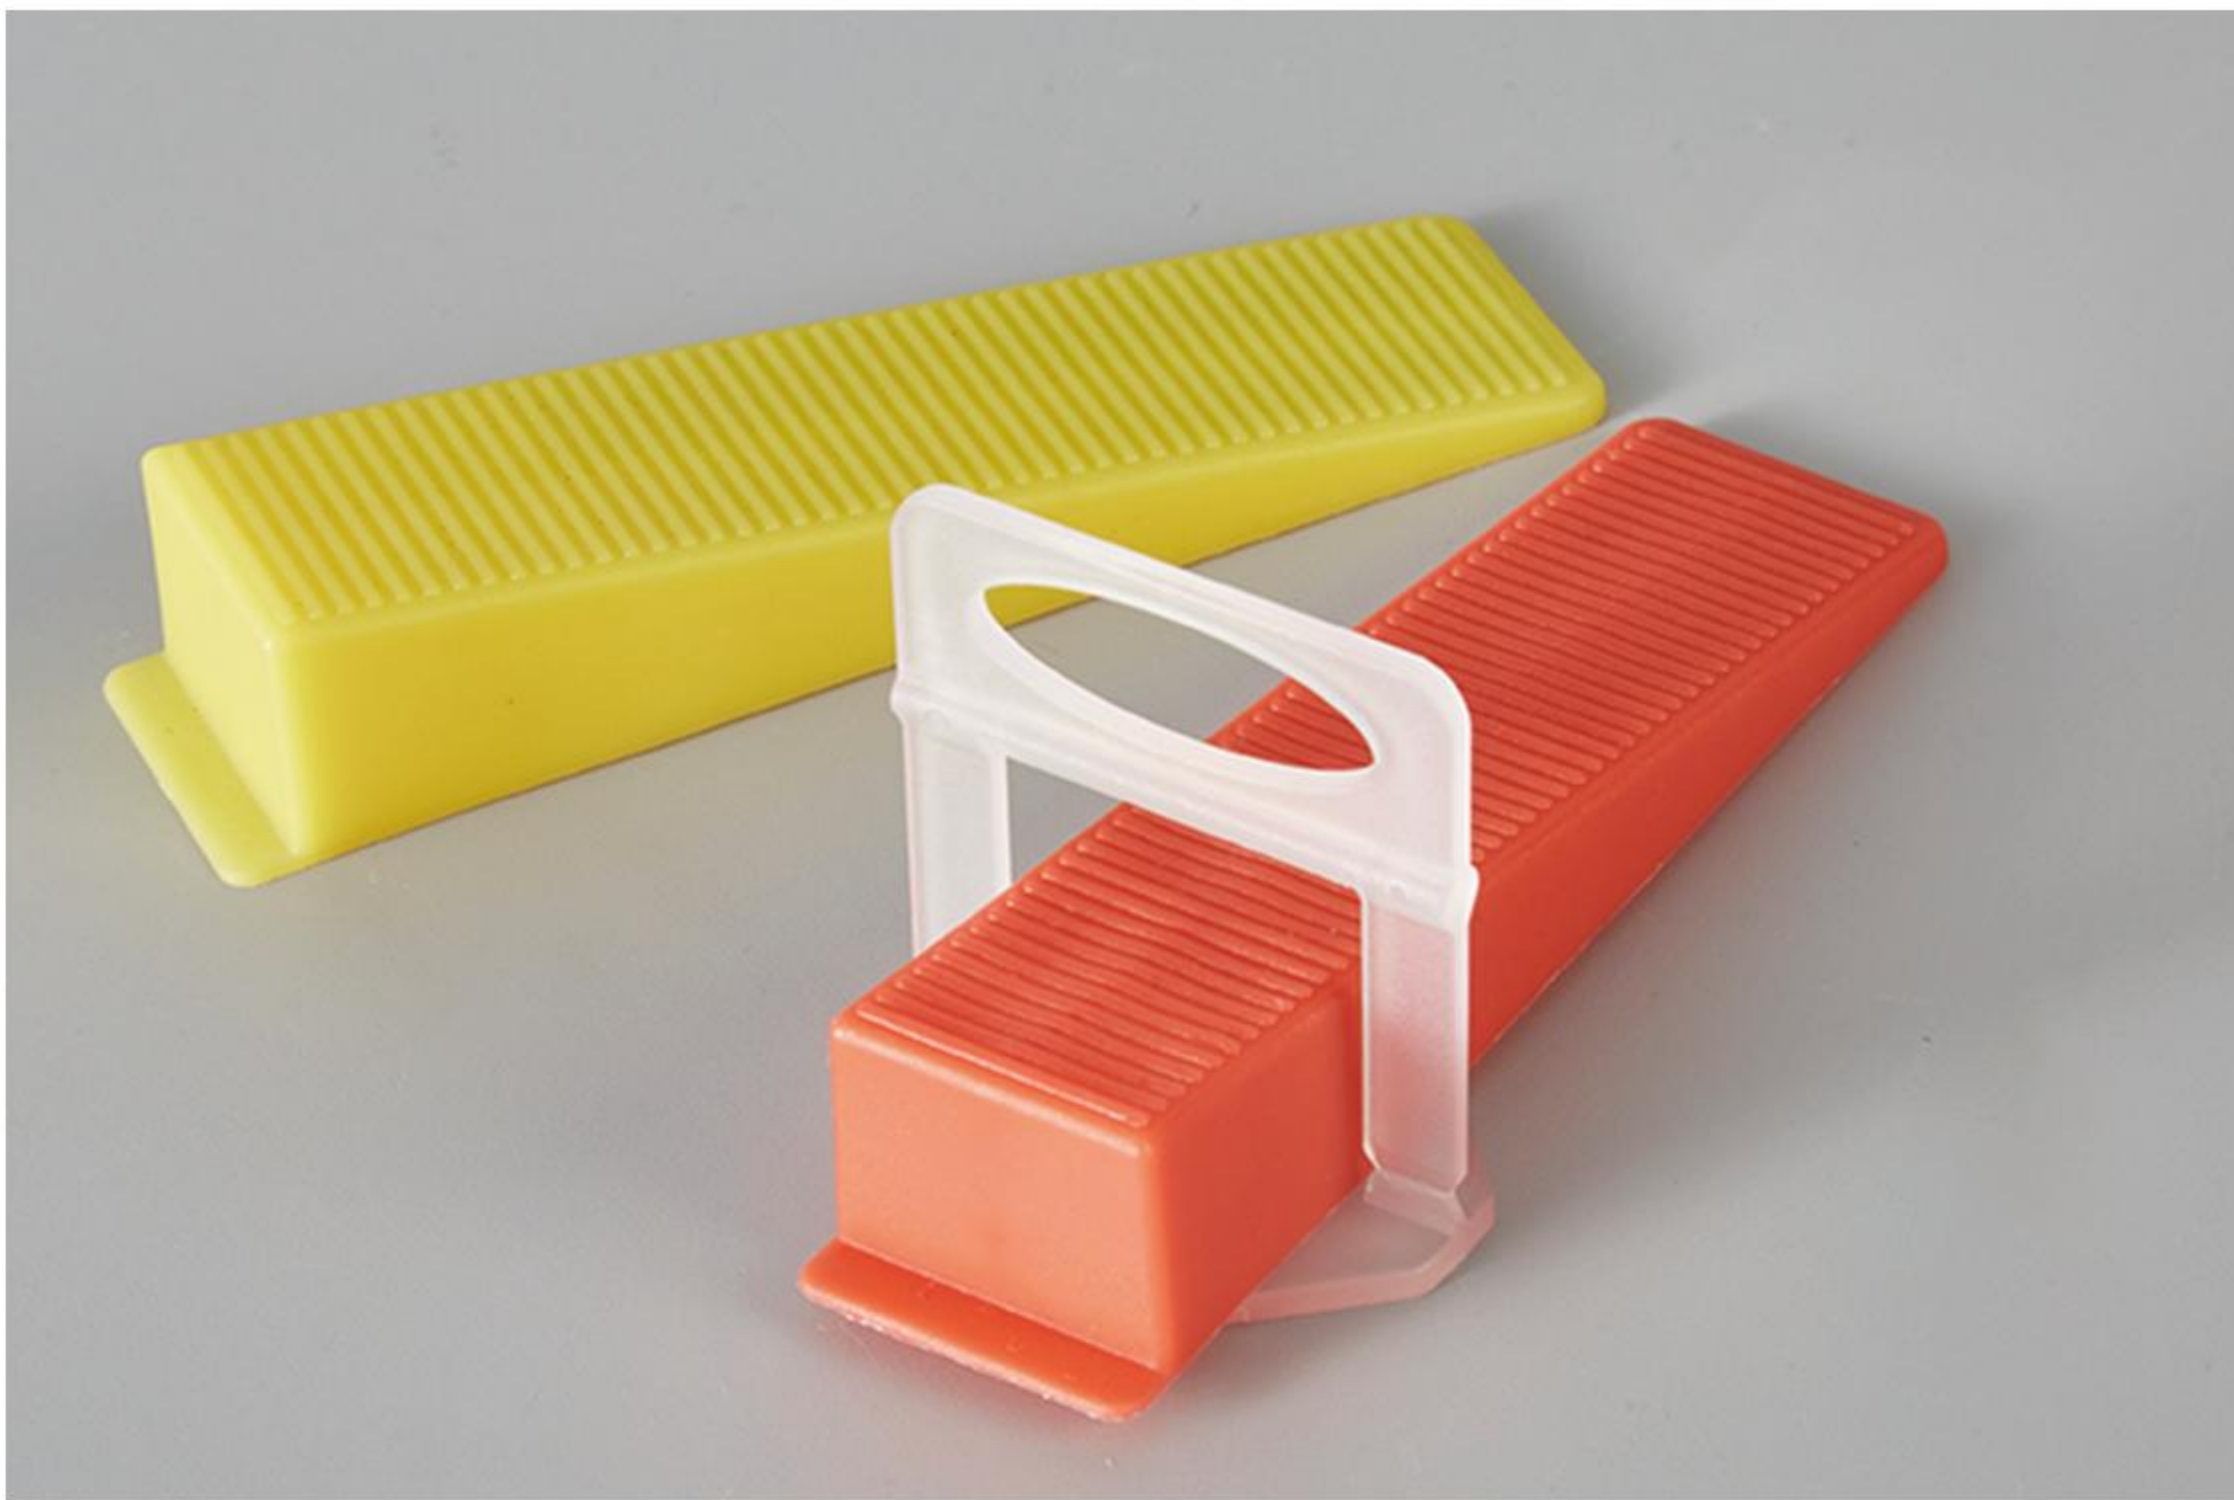

Rotating Nut

- 1、Features: Environmental protection, non-toxic, high toughness smooth body without burr, easy to install, long using life.
- 2、Specification: 6-1 rotating nut (Universal).
- 3、Material: Pure PP.
- 4、Function: Used in combination with 6-2.
- 5、Color: White, Green, Red, Yellow, other colors are available as requested.
- 6、Tile size: Most tiles.

- 1、特点：环保、无毒、韧性强、光滑无毛刺、安装简便、使用寿命长。
- 2、规格：6-1旋转螺母(通用)。
- 3、材料：纯新材料PP。
- 4、颜色：白色、绿色、红色、黄色，其他颜色可根据要求定制。
- 5、功能：与6-2配合使用。
- 6、瓷砖大小：大多数瓷砖。



Tile Leveler

- 1、Features: Environmental protection, non-toxic, high toughness smooth body without burr, easy to install, long using life.
- 2、Material: PP plastic + Stainless steel.
- 3、Color: White, Green, Red, Yellow, other colors are available as requested.
- 4、Brick gap: 1.5mm-6mm.
- 5、Tile thickness: 3mm-16mm.

- 1、特点：环保、无毒、韧性强、光滑无毛刺、安装简便、使用寿命长。
- 2、材质：PP塑料+不锈钢。
- 3、颜色：白色、绿色、红色、黄色，其他颜色可根据要求定制。
- 4、砖间距：1.5mm-6mm。
- 5、功瓷砖厚度：3mm-16mm。



扎带枪

Cable Tie Cutting Tool



NL-GT600

NL-GT600 stainless steel cable tie tool
Fast tightening and cutting function.
Suitable for stainless steel cable ties with a width of 4.6-8mm and a thickness of 0.4mm.

NL-GT600不锈钢扎带工具
具有快速收紧和切断的功能。
适用于宽度4.6-8mm,厚度0.4mm以内的不锈钢扎带。



NL-GT335

NL-GT335 stainless steel cable tie tool
Fast tightening and cutting function.
Suitable for stainless steel cable ties with a width of 4.6-8mm and a thickness of 0.4mm.

NL-GT335不锈钢扎带工具
具有快速收紧和切断的功能。
适用于宽度4.6-8mm,厚度0.4mm以内的不锈钢扎带。



NL-GT338

NL-GT338 stainless steel cable tie tool
Fast tightening and cutting function.
Suitable for stainless steel cable ties with a width of 8-20mm and a thickness of 0.8mm.

NL-GT338不锈钢扎带工具
具有快速收紧和切断的功能。
适用于宽度8-20mm,厚度0.8mm以内的不锈钢扎带。

扎带枪 Cable Tie Cutting Tool



NL-GT800

NL-GT800 stainless steel cable tie tool
Fast tightening and cutting function.
Suitable for stainless steel cable ties with a width of 8-25mm
and a thickness of 1mm.

NL-GT800不锈钢扎带工具
具有快速收紧和切断的功能。
适用于宽度8-25mm,厚度1mm以内的不锈钢扎带。



NL-GT600A

NL-GT600A stainless steel cable tie tool
Fast tightening and cutting function.
Suitable for stainless steel cable ties with a width of 4.6-8mm
and a thickness of 0.4mm.

NL-GT600A不锈钢扎带工具
具有快速收紧和切断的功能。
适用于宽度2.2-4.8mm,厚度1.6mm以内的不锈钢扎带。