
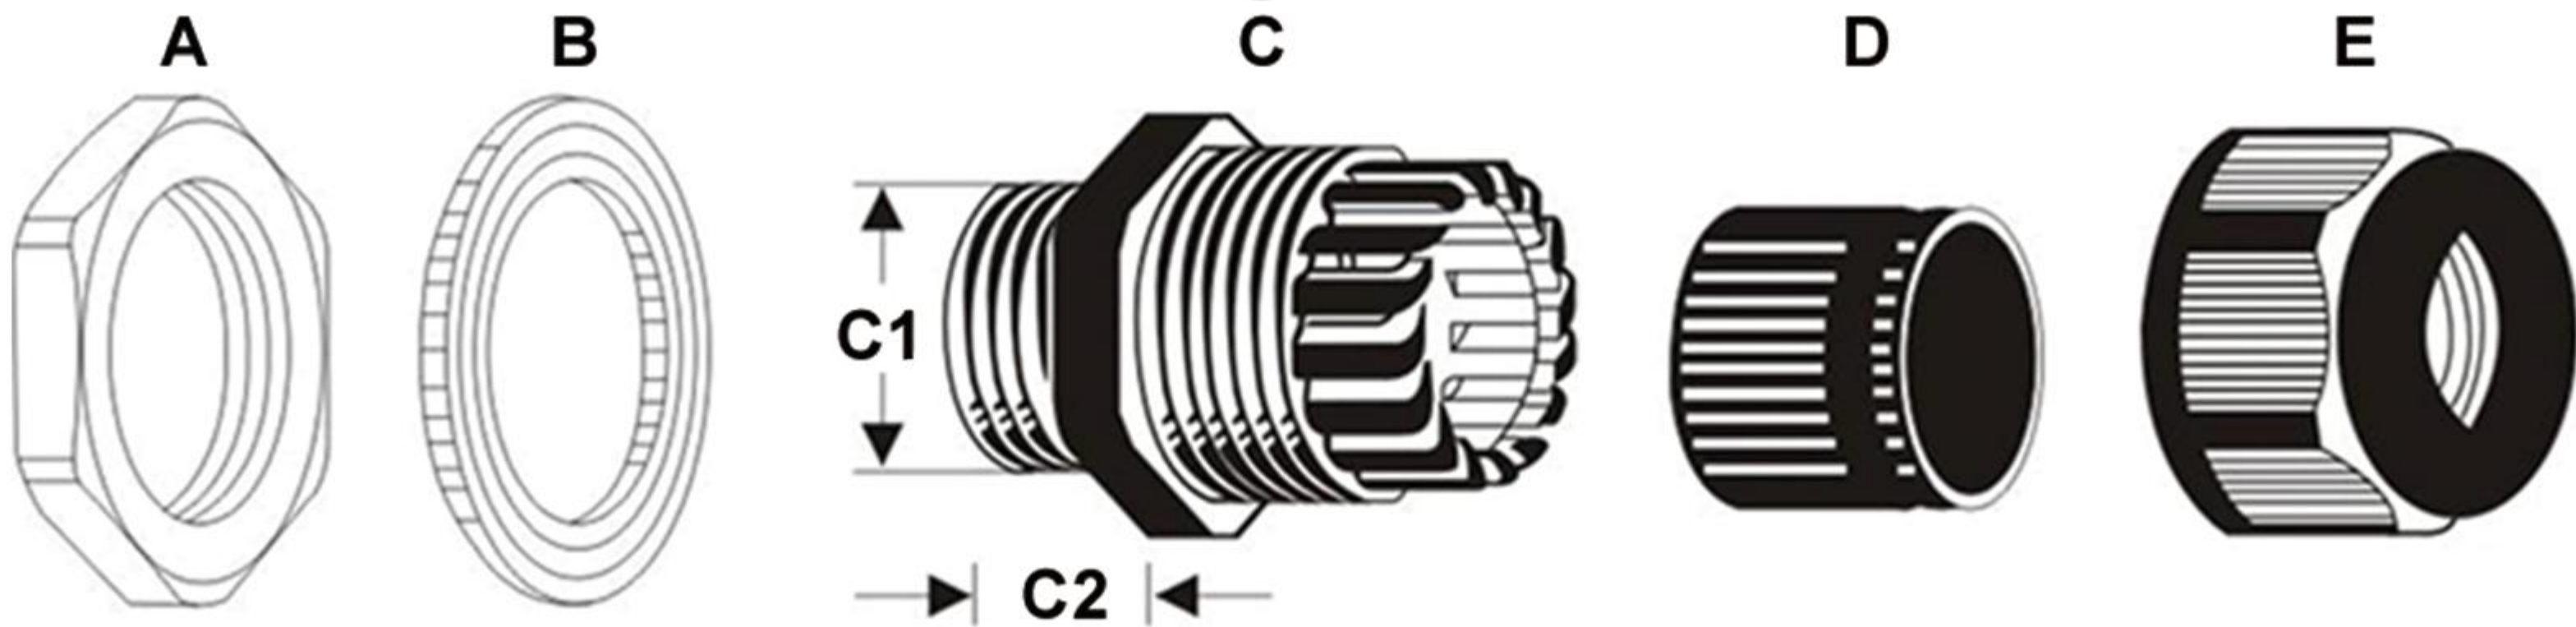


德制PG型电缆接头  
GER Standard Cable Glands (PG)

- 1、Features: The claws and seals with unique design can hold cable firmly and has a wider cable range. Anti-Acid, Anti-erosion, waterproof and dust-proof, not easy to get aging.
- 2、Material: Body and nut (Part A C E) are made of 100% fresh Nylon material (PP material can be customized), washer and seal (Part B D) are made of EPDM rubber.
- 3、Waterproof Rating: IP68.
- 4、Flammability: UL 94V-2.
- 5、Working temperature: -40°C to 100°C.
- 6、Color: Black, White-Grey, other colors are available as requested.

- 1、特点：独特的夹紧爪和垫片设计使得线缆连接更紧固，范围更大，耐酸、耐腐蚀、防水防尘、不易老化。
- 2、材质：主体和螺母（A、C、E部分）由100%全新尼龙料制成（可定制PP材质）垫圈和密封件（B、D部分）采用EPDM橡胶制成。
- 3、防水等级：IP68。
- 4、阻燃等级：UL 94V-2。
- 5、工作温度：-40°C至100°C。
- 6、颜色：黑色、白灰色，其他颜色可按要求提供。

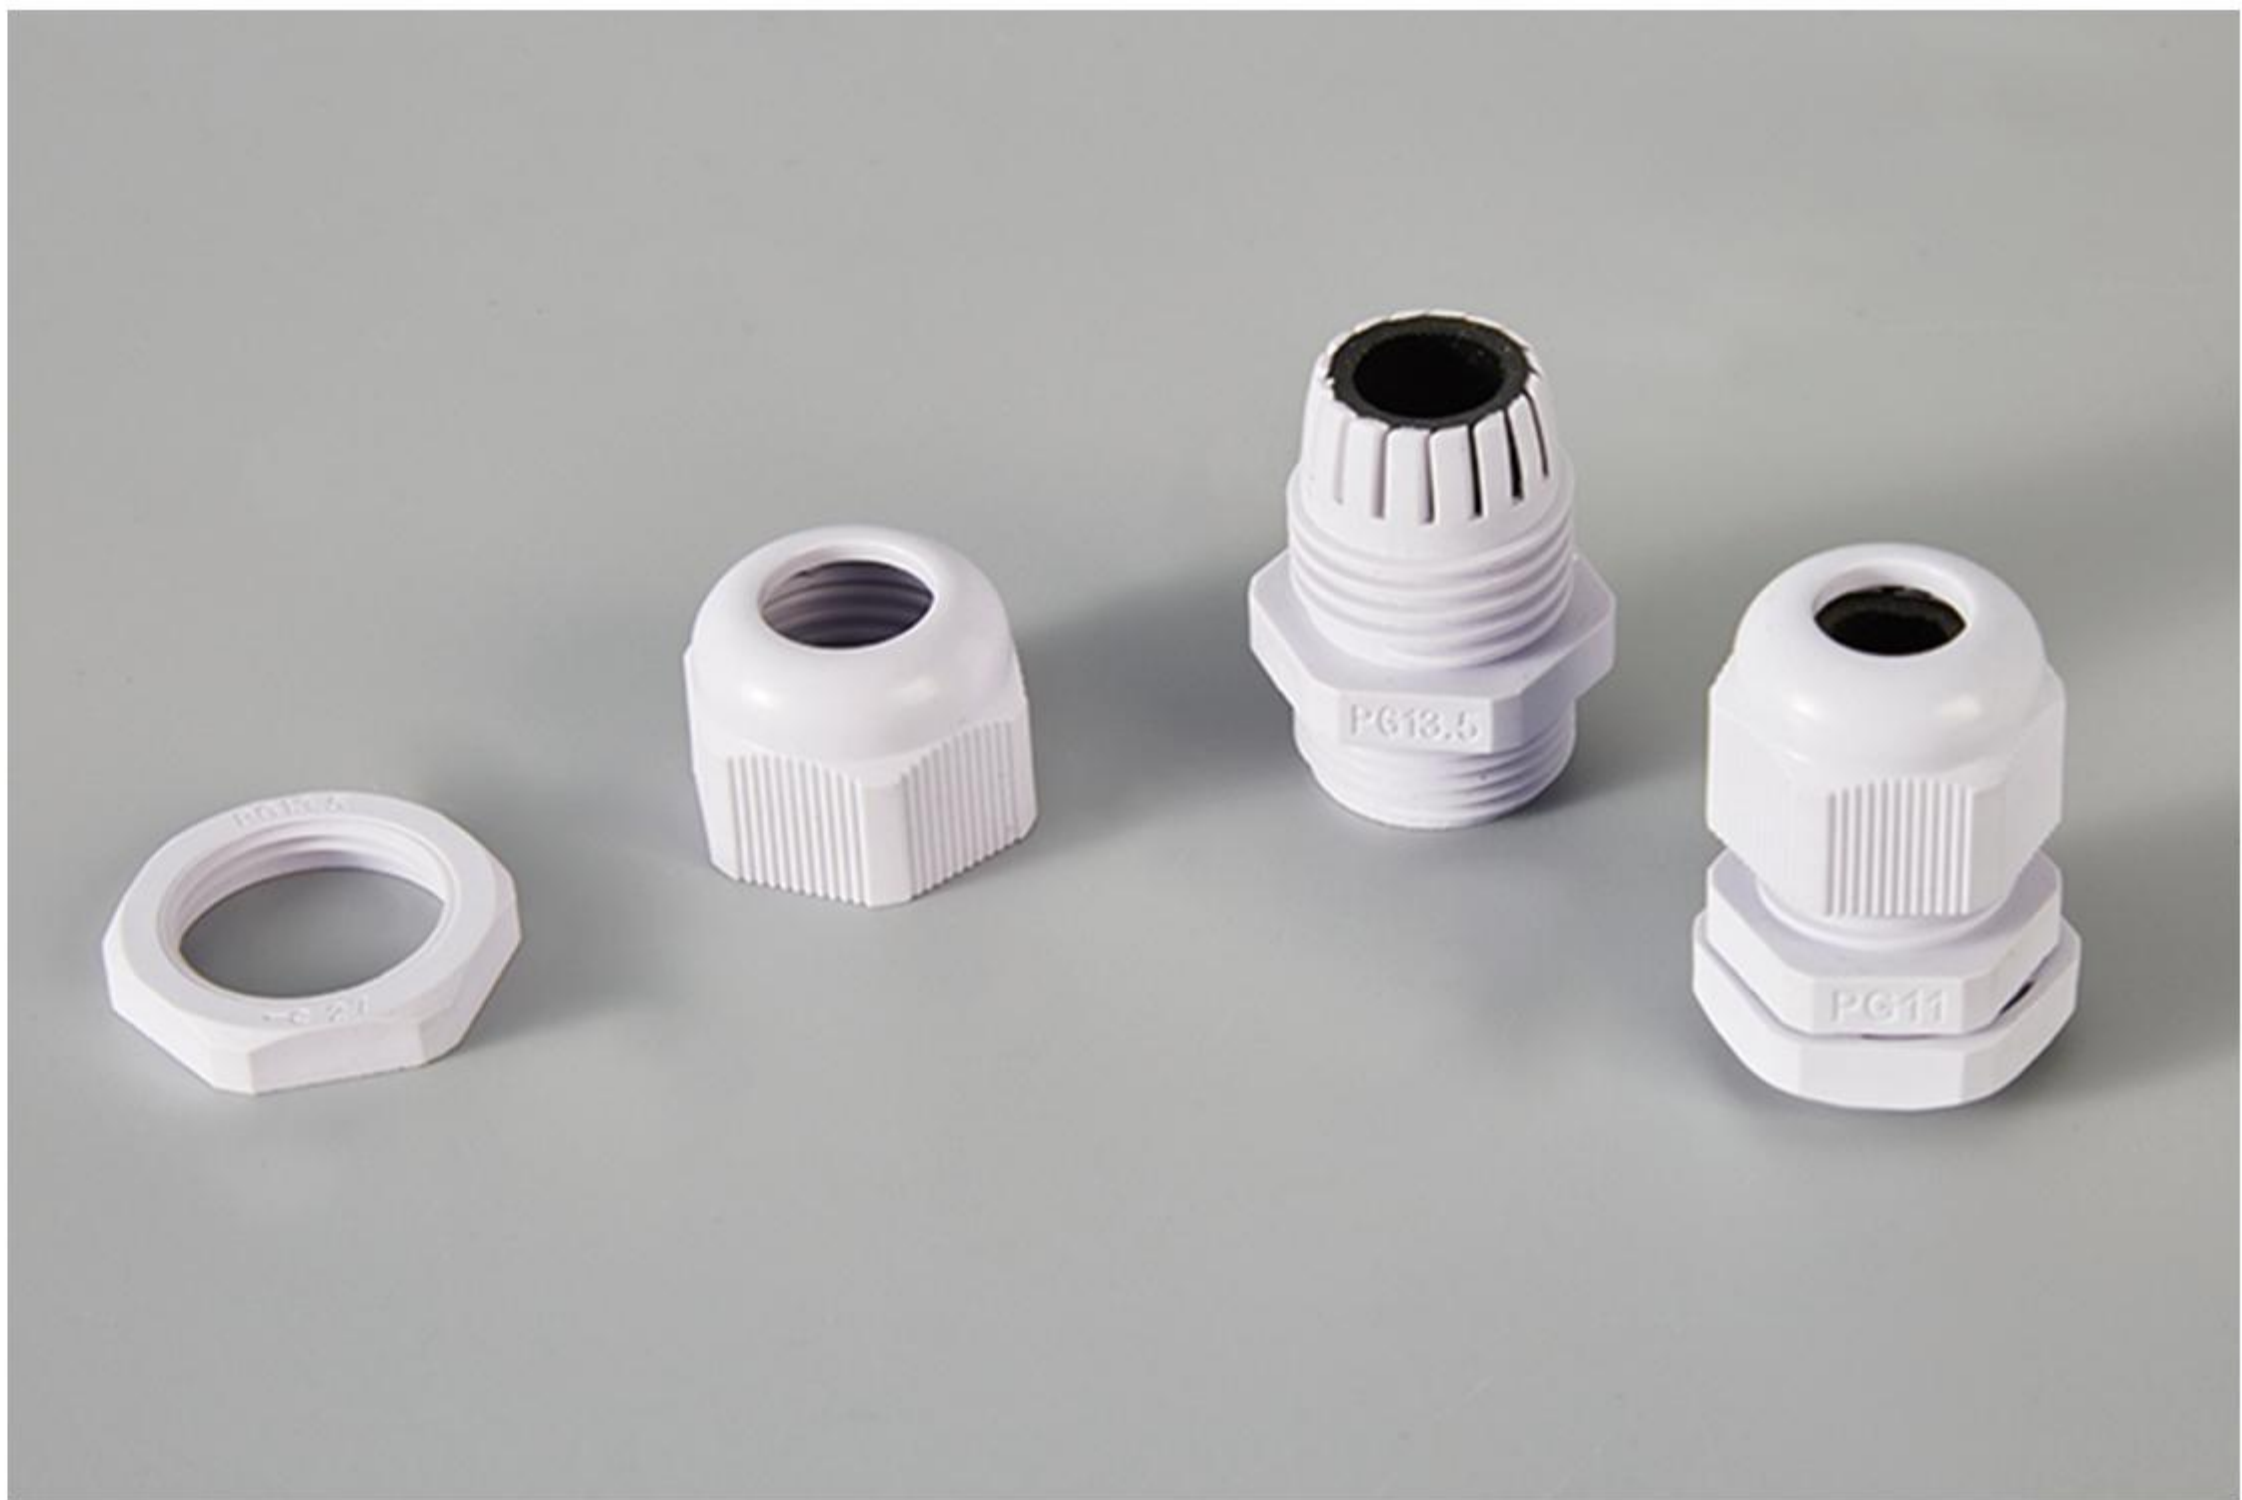


| Item No. | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|          | mm                   | inch      | mm                | inch | mm              | inch | mm           |
| PG7      | 3-6.5                | 0.12-0.25 | 8                 | 0.31 | 12.5            | 0.49 | 16           |
| PG7T     | 2-5                  | 0.08-0.2  | 8                 | 0.31 | 12.5            | 0.49 | 16           |
| PG9      | 4-8                  | 0.16-0.31 | 8                 | 0.31 | 15.2            | 0.6  | 19           |
| PG9T     | 2-6                  | 0.08-0.24 | 8                 | 0.31 | 15.2            | 0.6  | 19           |
| PG11     | 5-10                 | 0.2-0.39  | 8                 | 0.31 | 18.6            | 0.73 | 22           |
| PG11T    | 3-7                  | 0.12-0.27 | 8                 | 0.31 | 18.6            | 0.73 | 22           |
| PG13.5   | 6-12                 | 0.24-0.47 | 9                 | 0.35 | 20.4            | 0.8  | 24           |
| PG13.5T  | 5-9                  | 0.2-0.35  | 9                 | 0.35 | 20.4            | 0.8  | 24           |
| PG16     | 10-14                | 0.4-0.55  | 10                | 0.39 | 22.5            | 0.89 | 27           |
| PG16T    | 7-12                 | 0.28-0.47 | 10                | 0.39 | 22.5            | 0.89 | 27           |
| PG19     | 11-15                | 0.43-0.59 | 10                | 0.39 | 24              | 0.94 | 27           |
| PG19T    | 10-13                | 0.39-0.51 | 10                | 0.39 | 24              | 0.94 | 27           |
| PG21     | 13-18                | 0.51-0.71 | 10                | 0.39 | 28.3            | 1.11 | 33           |
| PG21T    | 9-16                 | 0.35-0.63 | 10                | 0.39 | 28.3            | 1.11 | 33           |
| PG25     | 16-20                | 0.63-0.79 | 11                | 0.43 | 30              | 1.18 | 35           |
| PG25T    | 13-18                | 0.51-0.71 | 11                | 0.43 | 30              | 1.18 | 35           |
| PG29     | 18-25                | 0.71-0.98 | 12                | 0.47 | 37              | 1.46 | 42           |
| PG29T    | 13-20                | 0.51-0.79 | 12                | 0.47 | 37              | 1.46 | 42           |
| PG36     | 25-32                | 0.98-1.26 | 15                | 0.59 | 47              | 1.85 | 52           |
| PG36T    | 20-26                | 0.79-1.02 | 15                | 0.59 | 47              | 1.85 | 52           |
| PG42     | 32-38                | 1.26-1.5  | 20                | 0.79 | 54              | 2.13 | 60           |
| PG42T    | 25-31                | 0.98-1.22 | 20                | 0.79 | 54              | 2.13 | 60           |
| PG48     | 37-44                | 1.46-1.73 | 20                | 0.79 | 59.3            | 2.33 | 64           |
| PG48T    | 29-35                | 1.14-1.38 | 20                | 0.79 | 59.3            | 2.33 | 64           |
| PG63     | 42-50                | 1.65-1.97 | 28                | 1.1  | 71              | 2.8  | 77           |
| PG63T    | 32-40                | 1.26-1.57 | 28                | 1.1  | 71              | 2.8  | 77           |



公制M型电缆接头  
Metric Cable Glands (M)

- 1、Features: The claws and seals with unique design can hold cable firmly and has a wider cable range. Anti-Acid, Anti-ero sion, waterproof and dust-proof, not easy to get aging.
- 2、Material: Body and nut (Part A C E) are made of 100% fresh Nylon material (PP material can be customized), washer and seal (Part B D) are made of EPDM rubber.
- 3、Waterproof Rating: IP68.
- 4、Flammability: UL 94V-2.
- 5、Working temperature: -40°C to 100°C.
- 6、Color: Black, White-Grey, other colors are available as re quested.

- 1、特点：独特的夹紧爪和垫片设计使得线缆连接更紧固，范围更大，耐酸、耐腐蚀、防水防尘、不易老化。
- 2、材质：主体和螺母（A、C、E部分）由100%全新尼龙料制成(可定制PP材质) 垫圈和密封件（B、D部分）采用EPDM橡胶制成。
- 3、防水等级：IP68。
- 4、阻燃等级：UL 94V-2。
- 5、工作温度：-40°C至100°C。
- 6、颜色：黑色、白灰色，其他颜色可按要求提供。

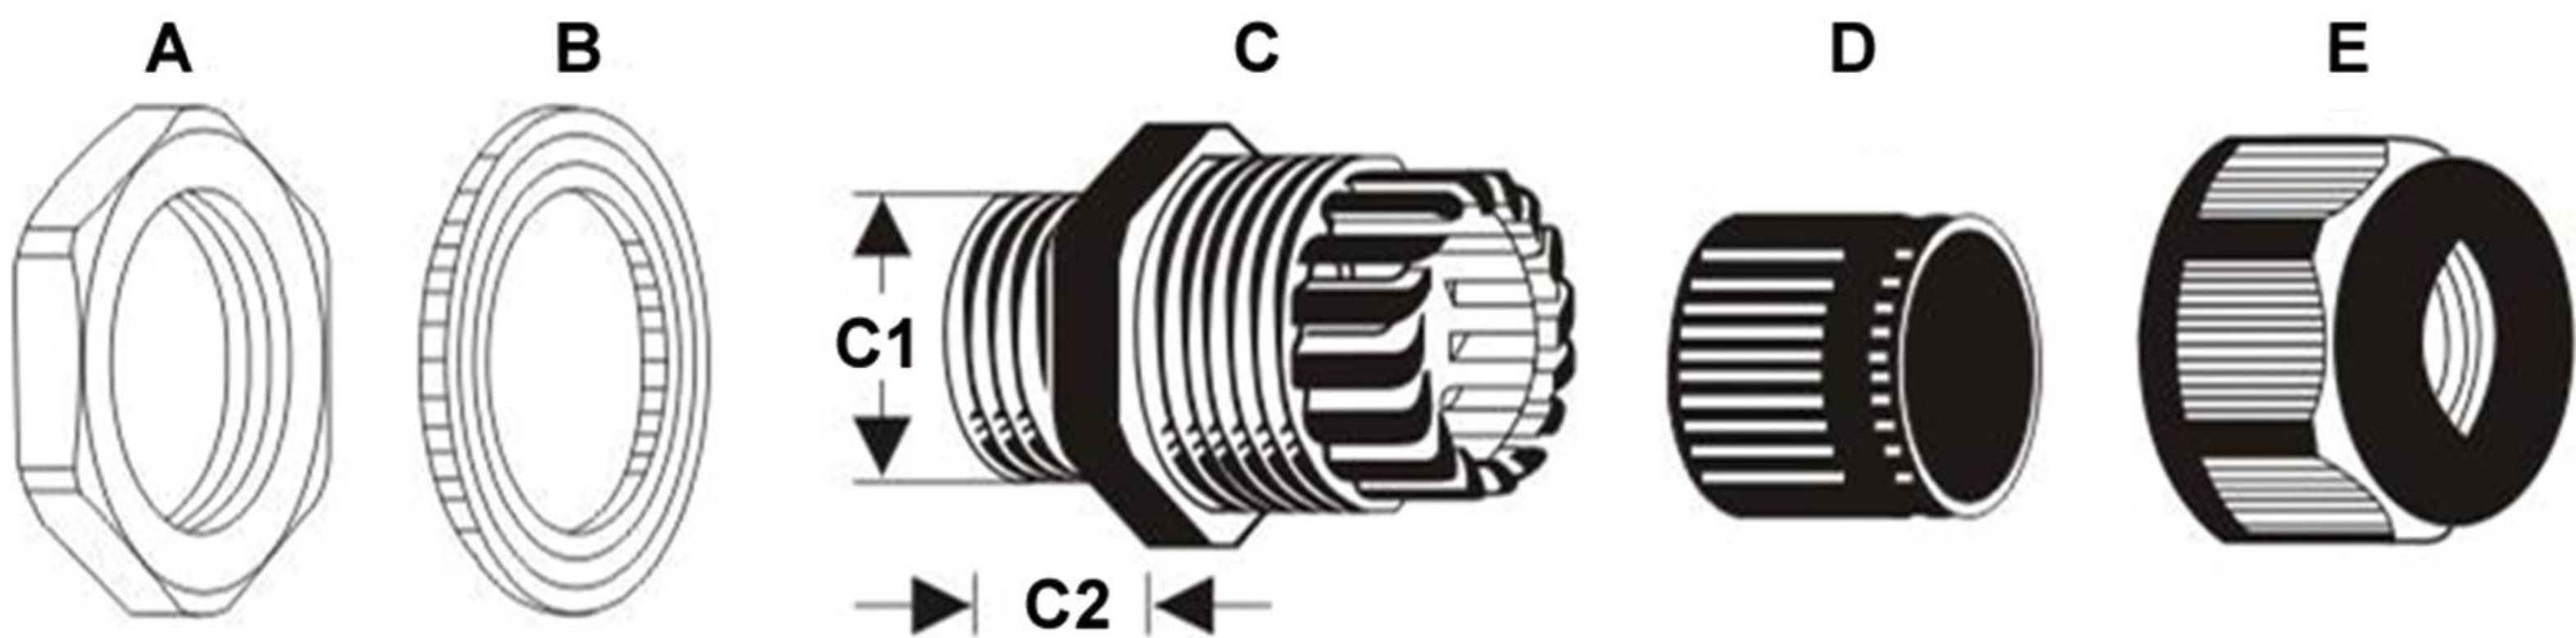

| Item No. | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|          | mm                   | inch      | mm                | inch | mm              | inch | mm           |
| M12x1.5  | 3-6.5                | 0.12-0.25 | 8                 | 0.31 | 12              | 0.47 | 16           |
| M12x1.5T | 2-5                  | 0.08-0.2  | 8                 | 0.31 | 12              | 0.47 | 16           |
| M16x1.5  | 4-8                  | 0.16-0.31 | 8                 | 0.31 | 16              | 0.63 | 19           |
| M16x1.5T | 2-6                  | 0.08-0.24 | 8                 | 0.31 | 16              | 0.63 | 19           |
| M18x1.5  | 5-10                 | 0.2-0.39  | 8                 | 0.31 | 18              | 0.71 | 22           |
| M18x1.5T | 3-7                  | 0.12-0.27 | 8                 | 0.31 | 18              | 0.71 | 22           |
| M20x1.5  | 6-12                 | 0.24-0.47 | 9                 | 0.35 | 20              | 0.79 | 24           |
| M20x1.5T | 5-9                  | 0.2-0.35  | 9                 | 0.35 | 20              | 0.79 | 24           |
| M22x1.5  | 10-14                | 0.4-0.55  | 10                | 0.39 | 22              | 0.87 | 27           |
| M22x1.5T | 7-12                 | 0.28-0.47 | 10                | 0.39 | 22              | 0.87 | 27           |
| M24x1.5  | 11-15                | 0.43-0.59 | 10                | 0.39 | 24              | 0.94 | 27           |
| M24x1.5T | 10-13                | 0.39-0.51 | 10                | 0.39 | 24              | 0.94 | 27           |
| M25x1.5  | 13-18                | 0.51-0.71 | 10                | 0.39 | 25              | 0.98 | 33           |
| M25x1.5T | 9-16                 | 0.35-0.63 | 10                | 0.39 | 25              | 0.98 | 33           |
| M32x1.5  | 16-20                | 0.63-0.79 | 12                | 0.47 | 32              | 1.26 | 35           |
| M32x1.5T | 13-18                | 0.51-0.71 | 12                | 0.47 | 32              | 1.26 | 35           |
| M36x1.5  | 18-25                | 0.71-0.98 | 15                | 0.59 | 36              | 1.42 | 42           |
| M36x1.5T | 13-20                | 0.51-0.79 | 15                | 0.59 | 36              | 1.42 | 42           |
| M40x1.5  | 25-32                | 0.98-1.26 | 15                | 0.59 | 40              | 1.57 | 52           |
| M40x1.5T | 20-26                | 0.79-1.02 | 15                | 0.59 | 40              | 1.57 | 52           |
| M50x1.5  | 32-38                | 1.26-1.5  | 20                | 0.79 | 50              | 1.97 | 60           |
| M50x1.5T | 25-31                | 0.98-1.22 | 20                | 0.79 | 50              | 1.97 | 60           |
| M63x1.5  | 37-44                | 1.46-1.73 | 20                | 0.79 | 63              | 2.48 | 64           |
| M63x1.5T | 29-35                | 1.14-1.38 | 20                | 0.79 | 63              | 2.48 | 64           |






MG分体式电缆接头  
Metric Cable Glands (MG)

- 1、Features: The claws and seals with unique design can hold cable firmly and has a wider cable range. Anti-Acid, Anti-erosion, waterproof and dust-proof, not easy to get aging.
- 2、Material: Body and nut (Part A C E) are made of 100% fresh Nylon material (PP material can be customized), washer and seal (Part B D) are made of EPDM rubber.
- 3、Waterproof Rating: IP68.
- 4、Flammability: UL 94V-2.
- 5、Working temperature: -40℃ to 100℃.
- 6、Color: Black, White-Grey, other colors are available as requested.

- 1、特点：独特的夹紧爪和垫片设计使得线缆连接更紧固，范围更大，耐酸、耐腐蚀、防水防尘、不易老化。
- 2、材质：主体和螺母（A、C、E部分）由100%全新尼龙料制成(可定制PP材质)垫圈和密封件（B、D部分）采用EPDM橡胶制成。
- 3、防水等级：IP68。
- 4、阻燃等级：UL 94V-2。
- 5、工作温度：-40℃至100℃。
- 6、颜色：黑色、白灰色，其他颜色可按要求提供。

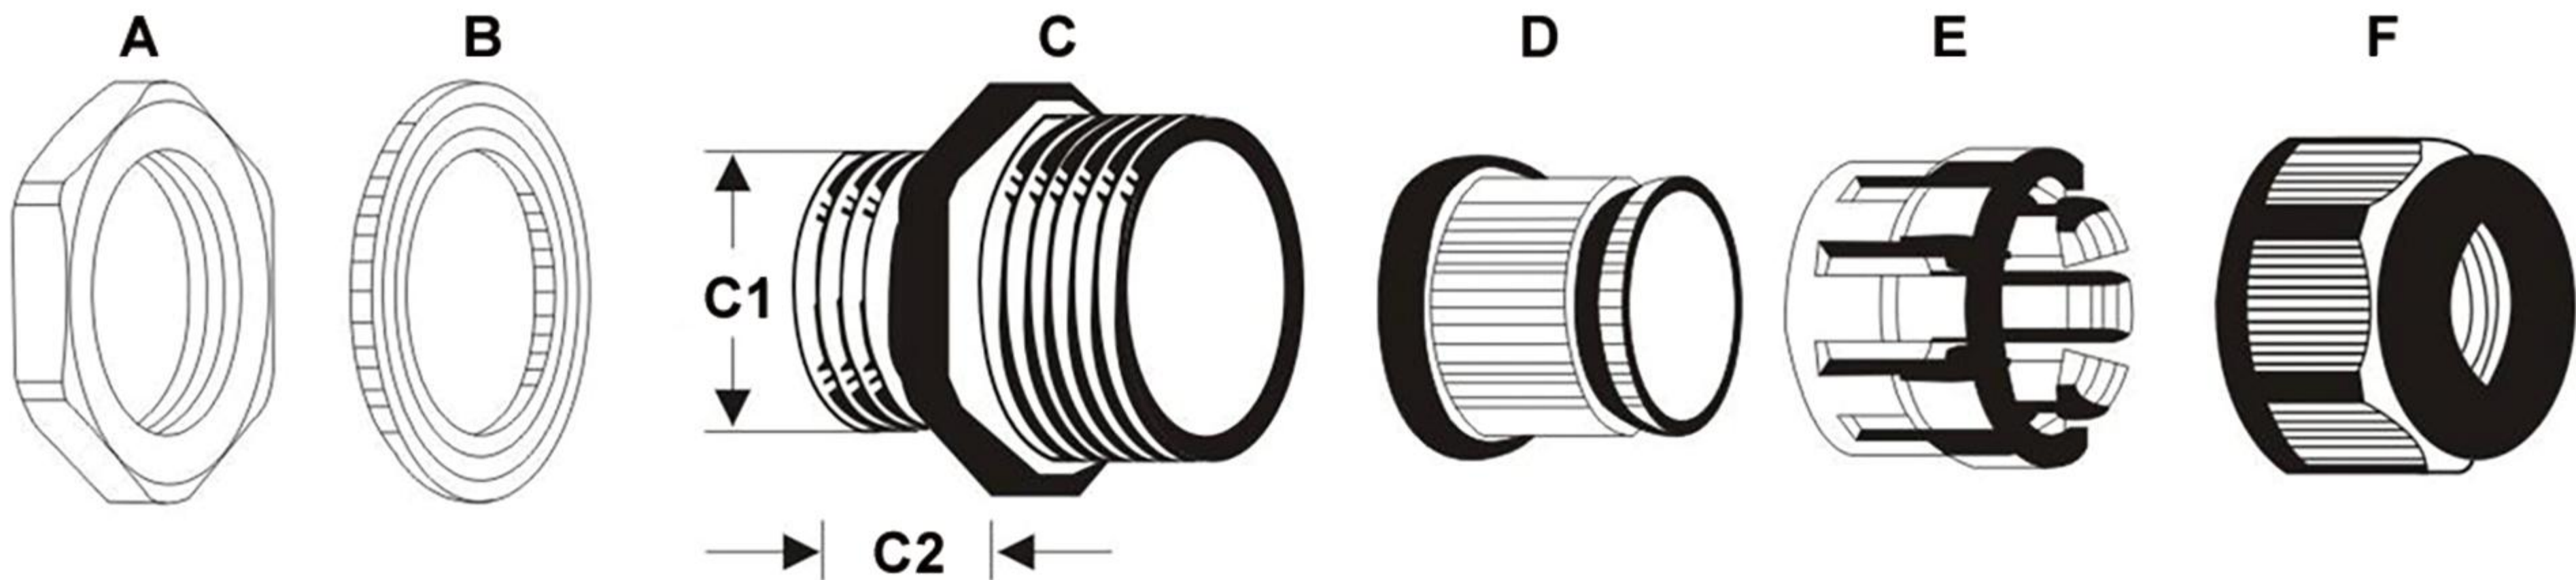


| Item No. | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|          | mm                   | inch      | mm                | inch | mm              | inch | mm           |
| M12x1.5  | 4.5-8                | 0.18-0.31 | 9                 | 0.35 | 12              | 0.47 | 19           |
| M12x1.5T | 3-5.3                | 0.12-0.21 | 9                 | 0.35 | 12              | 0.47 | 19           |
| M16x1.5  | 6-10                 | 0.24-0.39 | 15                | 0.59 | 16              | 0.63 | 22           |
| M16x1.5T | 4-7                  | 0.16-0.28 | 15                | 0.59 | 16              | 0.63 | 22           |
| M20x1.5  | 9-14                 | 0.35-0.55 | 15                | 0.59 | 20              | 0.79 | 27           |
| M20x1.5T | 6-11                 | 0.24-0.43 | 15                | 0.59 | 20              | 0.79 | 27           |
| M25x1.5  | 13-18                | 0.51-0.71 | 15                | 0.59 | 25              | 0.98 | 33           |
| M25x1.5T | 10-16                | 0.39-0.63 | 15                | 0.59 | 25              | 0.98 | 33           |
| M32x1.5  | 18-25                | 0.71-0.98 | 15                | 0.59 | 32              | 1.26 | 41           |
| M32x1.5T | 15-22                | 0.59-0.87 | 15                | 0.59 | 32              | 1.26 | 41           |
| M40x1.5  | 24-30                | 0.94-1.18 | 20                | 0.79 | 40              | 1.57 | 50           |
| M40x1.5T | 20-25                | 0.79-0.98 | 20                | 0.79 | 40              | 1.57 | 50           |
| M50x1.5  | 30-40                | 1.18-1.57 | 23                | 0.91 | 50              | 1.97 | 62           |
| M50x1.5T | 26-32                | 1.02-1.26 | 23                | 0.91 | 50              | 1.97 | 62           |
| M63x1.5  | 40-50                | 1.57-1.97 | 24                | 0.94 | 63              | 2.48 | 75           |
| M63x1.5T | 38-46                | 1.5-1.81  | 24                | 0.94 | 63              | 2.48 | 75           |



英制G型电缆接头  
UK Standard Cable Glands (G)

- 1、Features: The claws and seals with unique design can hold cable firmly and has a wider cable range. Anti-Acid, Anti-erosion, waterproof and dust-proof, not easy to get aging.
- 2、Material: Body and nut (Part A C E) are made of 100% fresh Nylon material (PP material can be customized), washer and seal (Part B D) are made of EPDM rubber.
- 3、Waterproof Rating: IP68.
- 4、Flammability: UL 94V-2.
- 5、Working temperature: -40°C to 100°C.
- 6、Color: Black, White-Grey, other colors are available as requested.

- 1、特点：独特的夹紧爪和垫片设计使得线缆连接更紧固，范围更大，耐酸、耐腐蚀、防水防尘、不易老化。
- 2、材质：主体和螺母（A、C、E部分）由100%全新尼龙料制成（可定制PP材质）垫圈和密封件（B、D部分）采用EPDM橡胶制成。
- 3、防水等级：IP68。
- 4、阻燃等级：UL 94V-2。
- 5、工作温度：-40°C至100°C。
- 6、颜色：黑色、白灰色，其他颜色可按要求提供。

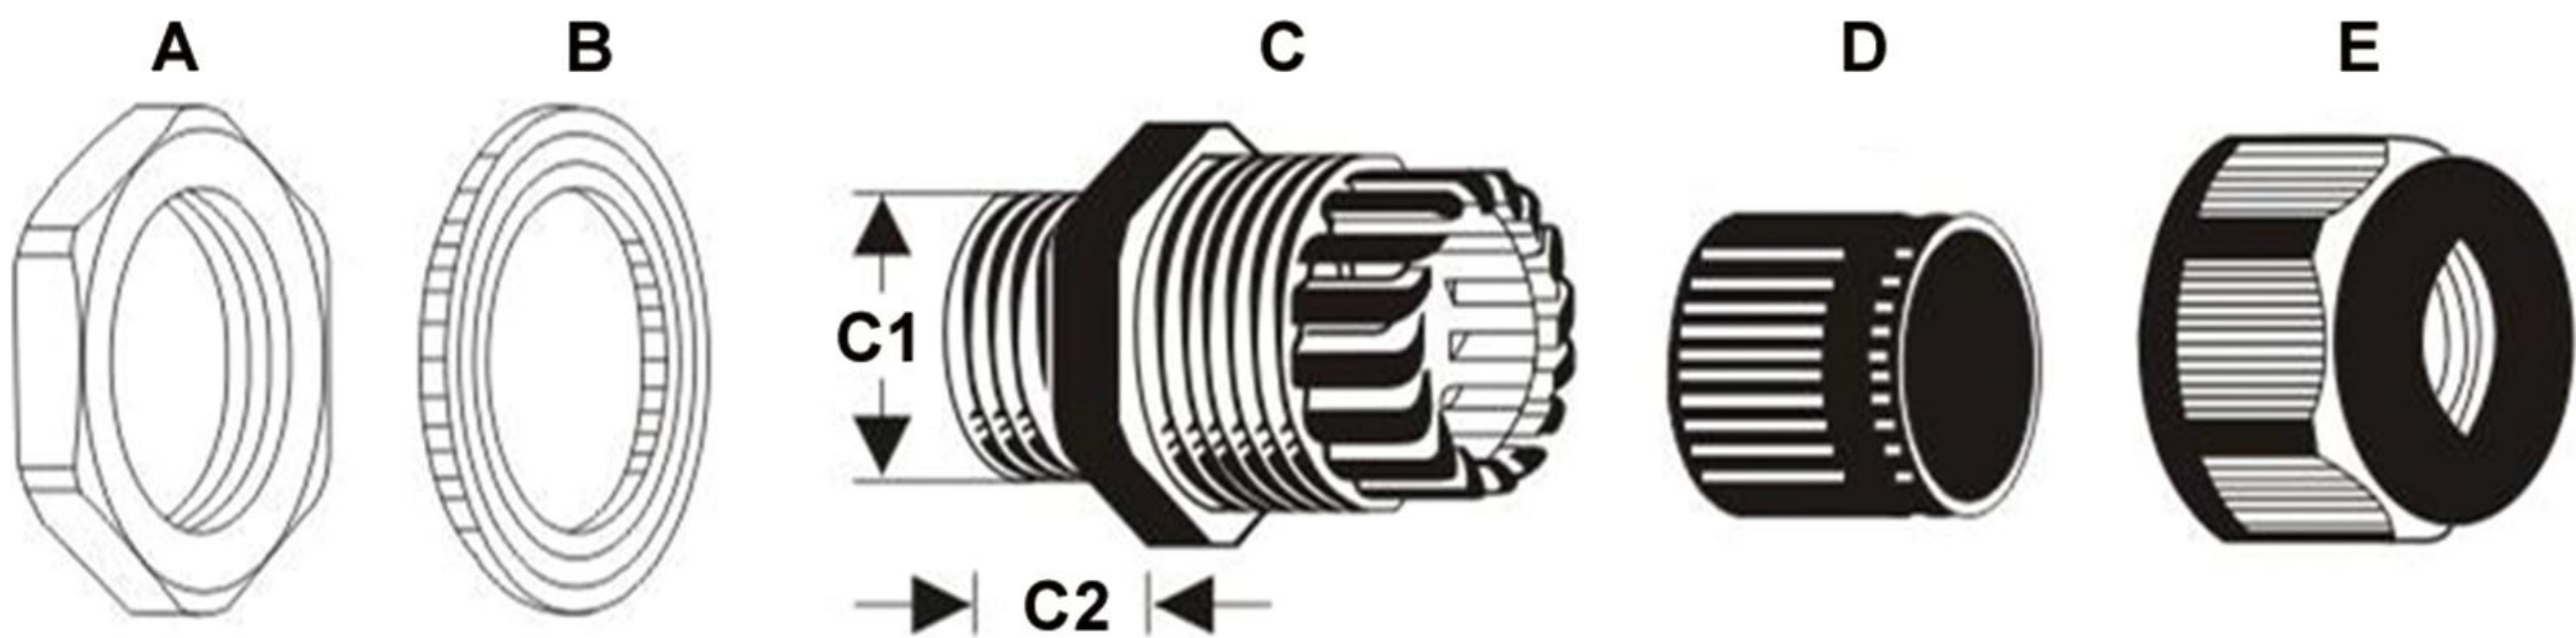

| Item No. | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|          | mm                   | inch      | mm                | inch | mm              | inch | mm           |
| G1/4     | 3-6.5                | 0.12-0.25 | 8                 | 0.31 | 13.1            | 0.51 | 16           |
| G1/4T    | 2-5                  | 0.08-0.2  | 8                 | 0.31 | 13.1            | 0.51 | 16           |
| G3/8     | 4-8                  | 0.16-0.31 | 10                | 0.39 | 16.7            | 0.66 | 19           |
| G3/8T    | 2-6                  | 0.08-0.23 | 10                | 0.39 | 16.7            | 0.66 | 19           |
| G1/2     | 6-12                 | 0.23-0.47 | 10                | 0.39 | 21              | 0.83 | 24           |
| G1/2T    | 5-9                  | 0.2-0.35  | 10                | 0.39 | 21              | 0.83 | 24           |
| G3/4     | 12-18                | 0.47-0.71 | 12                | 0.47 | 26.5            | 1.04 | 33           |
| G3/4T    | 9-16                 | 0.35-0.63 | 12                | 0.47 | 26.5            | 1.04 | 33           |
| G1       | 18-25                | 0.71-0.98 | 13.5              | 0.53 | 33.2            | 1.31 | 42           |
| G1T      | 13-20                | 0.51-0.79 | 13.5              | 0.53 | 33.2            | 1.31 | 42           |
| G1-1/2   | 22-32                | 0.87-1.26 | 15                | 0.59 | 41.9            | 1.65 | 52           |
| G1-1/2T  | 20-26                | 0.51-1.02 | 15                | 0.59 | 41.9            | 1.65 | 52           |
| G2       | 37-44                | 0.95-1.26 | 18                | 0.71 | 41.9            | 1.65 | 64           |
| G2T      | 29-35                | 1.14-1.38 | 18                | 0.71 | 41.9            | 1.65 | 64           |






美制NPT型电缆接头  
USA Standard Cable Glands (NPT)

- 1、Features: The claws and seals with unique design can hold cable firmly and has a wider cable range. Anti-Acid, Anti-erosion, waterproof and dust-proof, not easy to get aging.
- 2、Material: Body and nut (Part A C E) are made of 100% fresh Nylon material (PP material can be customized), washer and seal (Part B D) are made of EPDM rubber.
- 3、Waterproof Rating: IP68.
- 4、Flammability: UL 94V-2.
- 5、Working temperature: -40℃ to 100℃.
- 6、Color: Black, White-Grey, other colors are available as requested.

- 1、特点：独特的夹紧爪和垫片设计使得线缆连接更紧固，范围更大，耐酸、耐腐蚀、防水防尘、不易老化。
- 2、材质：主体和螺母（A、C、E部分）由100%全新尼龙料制成(可定制PP材质) 垫圈和密封件（B、D部分）采用EPDM橡胶制成。
- 3、防水等级：IP68。
- 4、阻燃等级：UL 94V-2。
- 5、工作温度：-40℃至100℃。
- 6、颜色：黑色、白灰色，其他颜色可按要求提供。

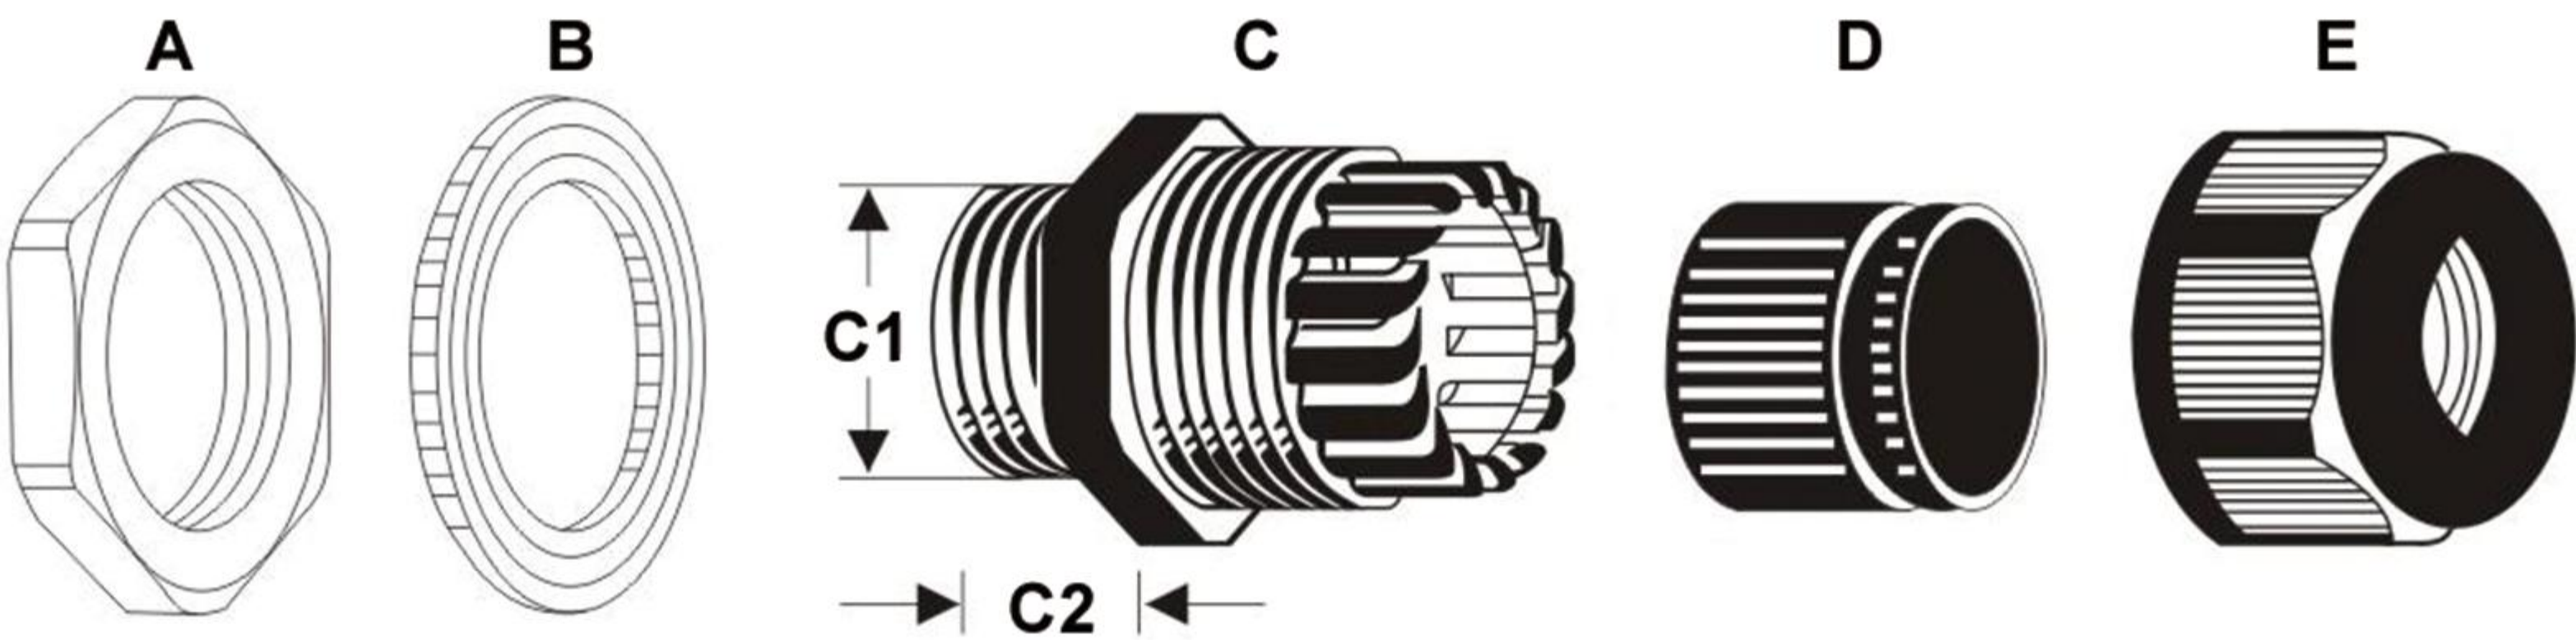

| Item No.  | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|-----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|           | mm                   | inch      | mm                | inch | mm              | inch | mm           |
| NPT3/8    | 6-10                 | 0.24-0.39 | 10                | 0.39 | 16.7            | 0.66 | 22           |
| NPT3/8T   | 4-7                  | 0.16-0.27 | 10                | 0.39 | 16.7            | 0.66 | 22           |
| NPT1/2    | 7-12                 | 0.28-0.47 | 10                | 0.39 | 21              | 0.83 | 24           |
| NPT1/2T   | 5-9                  | 0.2-0.35  | 10                | 0.39 | 21              | 0.83 | 24           |
| NPT3/4    | 12-18                | 0.47-0.71 | 15                | 0.59 | 26.5            | 1.04 | 33           |
| NPT3/4T   | 11-16                | 0.43-0.63 | 15                | 0.59 | 26.5            | 1.04 | 33           |
| NPT1      | 18-25                | 0.71-0.98 | 17                | 0.67 | 33.2            | 1.31 | 41           |
| NPT1T     | 16-22                | 0.63-0.86 | 17                | 0.67 | 33.2            | 1.31 | 41           |
| NPT1-1/4  | 24-32                | 0.95-1.26 | 17                | 0.67 | 41.9            | 1.65 | 52           |
| NPT1-1/4T | 21-26                | 0.83-1.02 | 17                | 0.67 | 41.9            | 1.65 | 52           |



塑料堵头  
Nylon Screw Plug

- 1、Features: Precision thread, excellent waterproof performance, easy to install. Anti-Acid, Anti-erosion, not easy to get aging.

2、Material: 100% fresh Nylon material (PP material can be customized).

3、Waterproof Rating: IP68.

4、Flammability: UL 94V-2.

5、Working temperature: -40°C to 100°C.

6、Color: Black, White-Grey, other colors are available as requested.
- 1、特点：螺纹精密，防水性能优异，安装便捷，耐酸、耐腐蚀、不易老化。


2、材质：100%全新尼龙料制成(可定制PP材质)。

3、防水等级：IP68。

4、阻燃等级：UL 94V-2。

5、工作温度：-40°C至100°C。


6、颜色：黑色、白灰色，其他颜色可按要求提供。

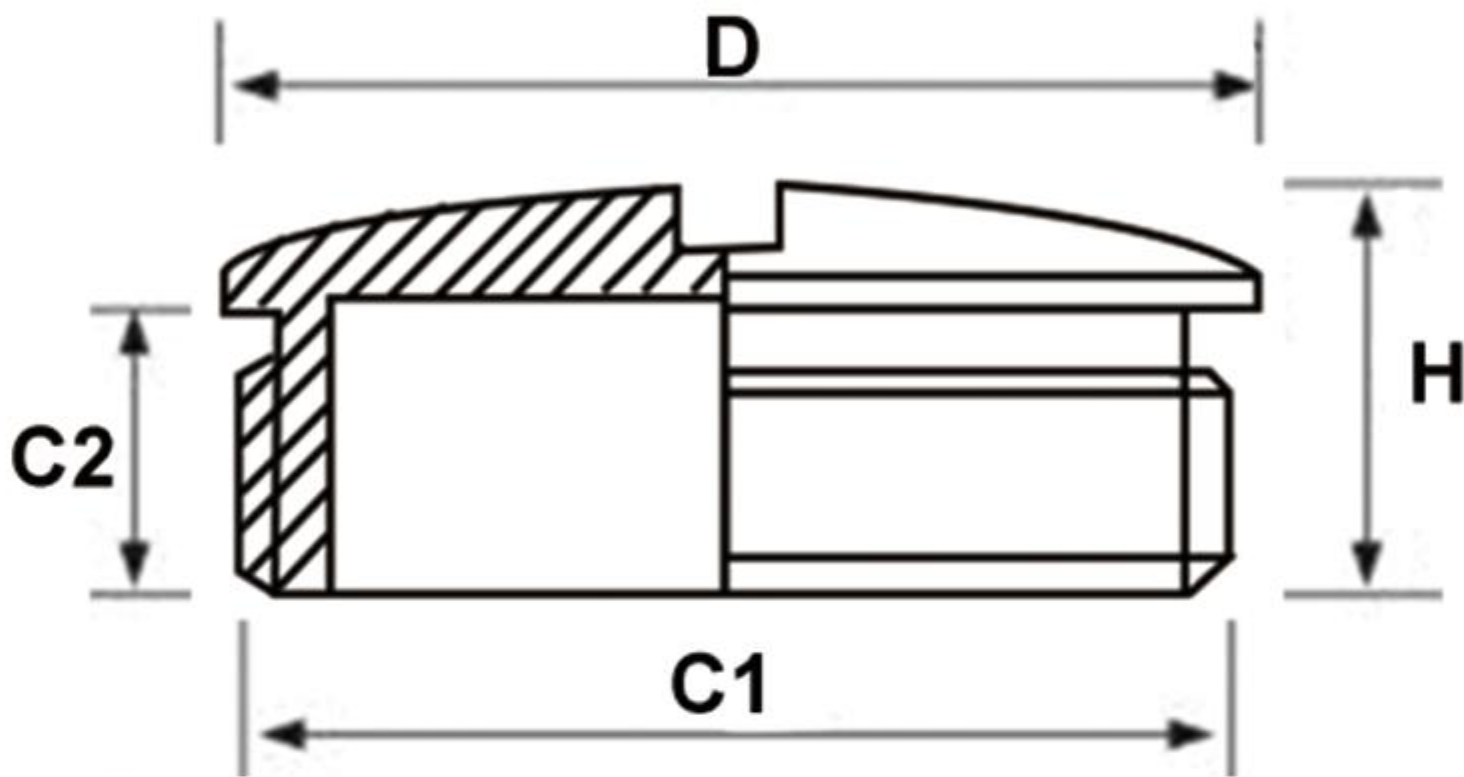

| Item No. | Thread Dia.(C1) |      | Thread Length(C2) |      | Height (H) |      | Nut Dia. (D) |      |
|----------|-----------------|------|-------------------|------|------------|------|--------------|------|
|          | mm              | inch | mm                | inch | mm         | inch | mm           | inch |
| PG7      | 12.5            | 0.49 | 8.5               | 0.33 | 12.5       | 0.49 | 15           | 0.59 |
| PG9      | 15.2            | 0.6  | 8.5               | 0.33 | 13         | 0.51 | 19           | 0.75 |
| PG11     | 18.6            | 0.73 | 9                 | 0.35 | 13         | 0.51 | 22           | 0.87 |
| PG13.5   | 20.4            | 0.8  | 9                 | 0.35 | 13         | 0.51 | 25           | 0.98 |
| PG16     | 22.5            | 0.89 | 10.5              | 0.41 | 15         | 0.59 | 27           | 1.06 |
| PG21     | 28.3            | 1.11 | 10.5              | 0.41 | 15.5       | 0.61 | 33           | 1.3  |
| PG29     | 37              | 1.46 | 11.5              | 0.45 | 16         | 0.63 | 44           | 1.73 |
| PG36     | 47              | 1.85 | 13.5              | 0.53 | 18         | 0.71 | 55           | 2.17 |
| PG42     | 54              | 2.13 | 13.5              | 0.53 | 18.5       | 0.73 | 62           | 2.44 |
| PG48     | 59.3            | 2.33 | 14.5              | 0.57 | 19.5       | 0.77 | 68           | 2.68 |
| M12x1.5  | 12              | 0.47 | 8.5               | 0.33 | 12.5       | 0.49 | 15           | 0.59 |
| M16x1.5  | 16              | 0.63 | 8.5               | 0.33 | 13         | 0.51 | 19           | 0.75 |
| M18x1.5  | 18              | 0.71 | 9                 | 0.35 | 13         | 0.51 | 22           | 0.87 |
| M20x1.5  | 20              | 0.79 | 9                 | 0.35 | 13         | 0.51 | 25           | 0.98 |
| M22x1.5  | 22              | 0.87 | 10.5              | 0.41 | 15         | 0.59 | 27           | 1.06 |
| M25x1.5  | 25              | 0.98 | 10.5              | 0.41 | 15.5       | 0.61 | 30           | 1.18 |
| M27x1.5  | 27              | 1.06 | 10.5              | 0.41 | 15.5       | 0.61 | 33           | 1.3  |
| M32x1.5  | 32              | 1.26 | 10.5              | 0.41 | 16         | 0.63 | 38           | 1.5  |
| M40x1.5  | 40              | 1.57 | 11.5              | 0.45 | 16         | 0.63 | 46           | 1.81 |
| M50x1.5  | 50              | 1.97 | 13.5              | 0.53 | 18         | 0.71 | 56           | 2.2  |
| M63x1.5  | 63              | 2.48 | 14                | 0.55 | 19         | 0.75 | 68           | 2.68 |






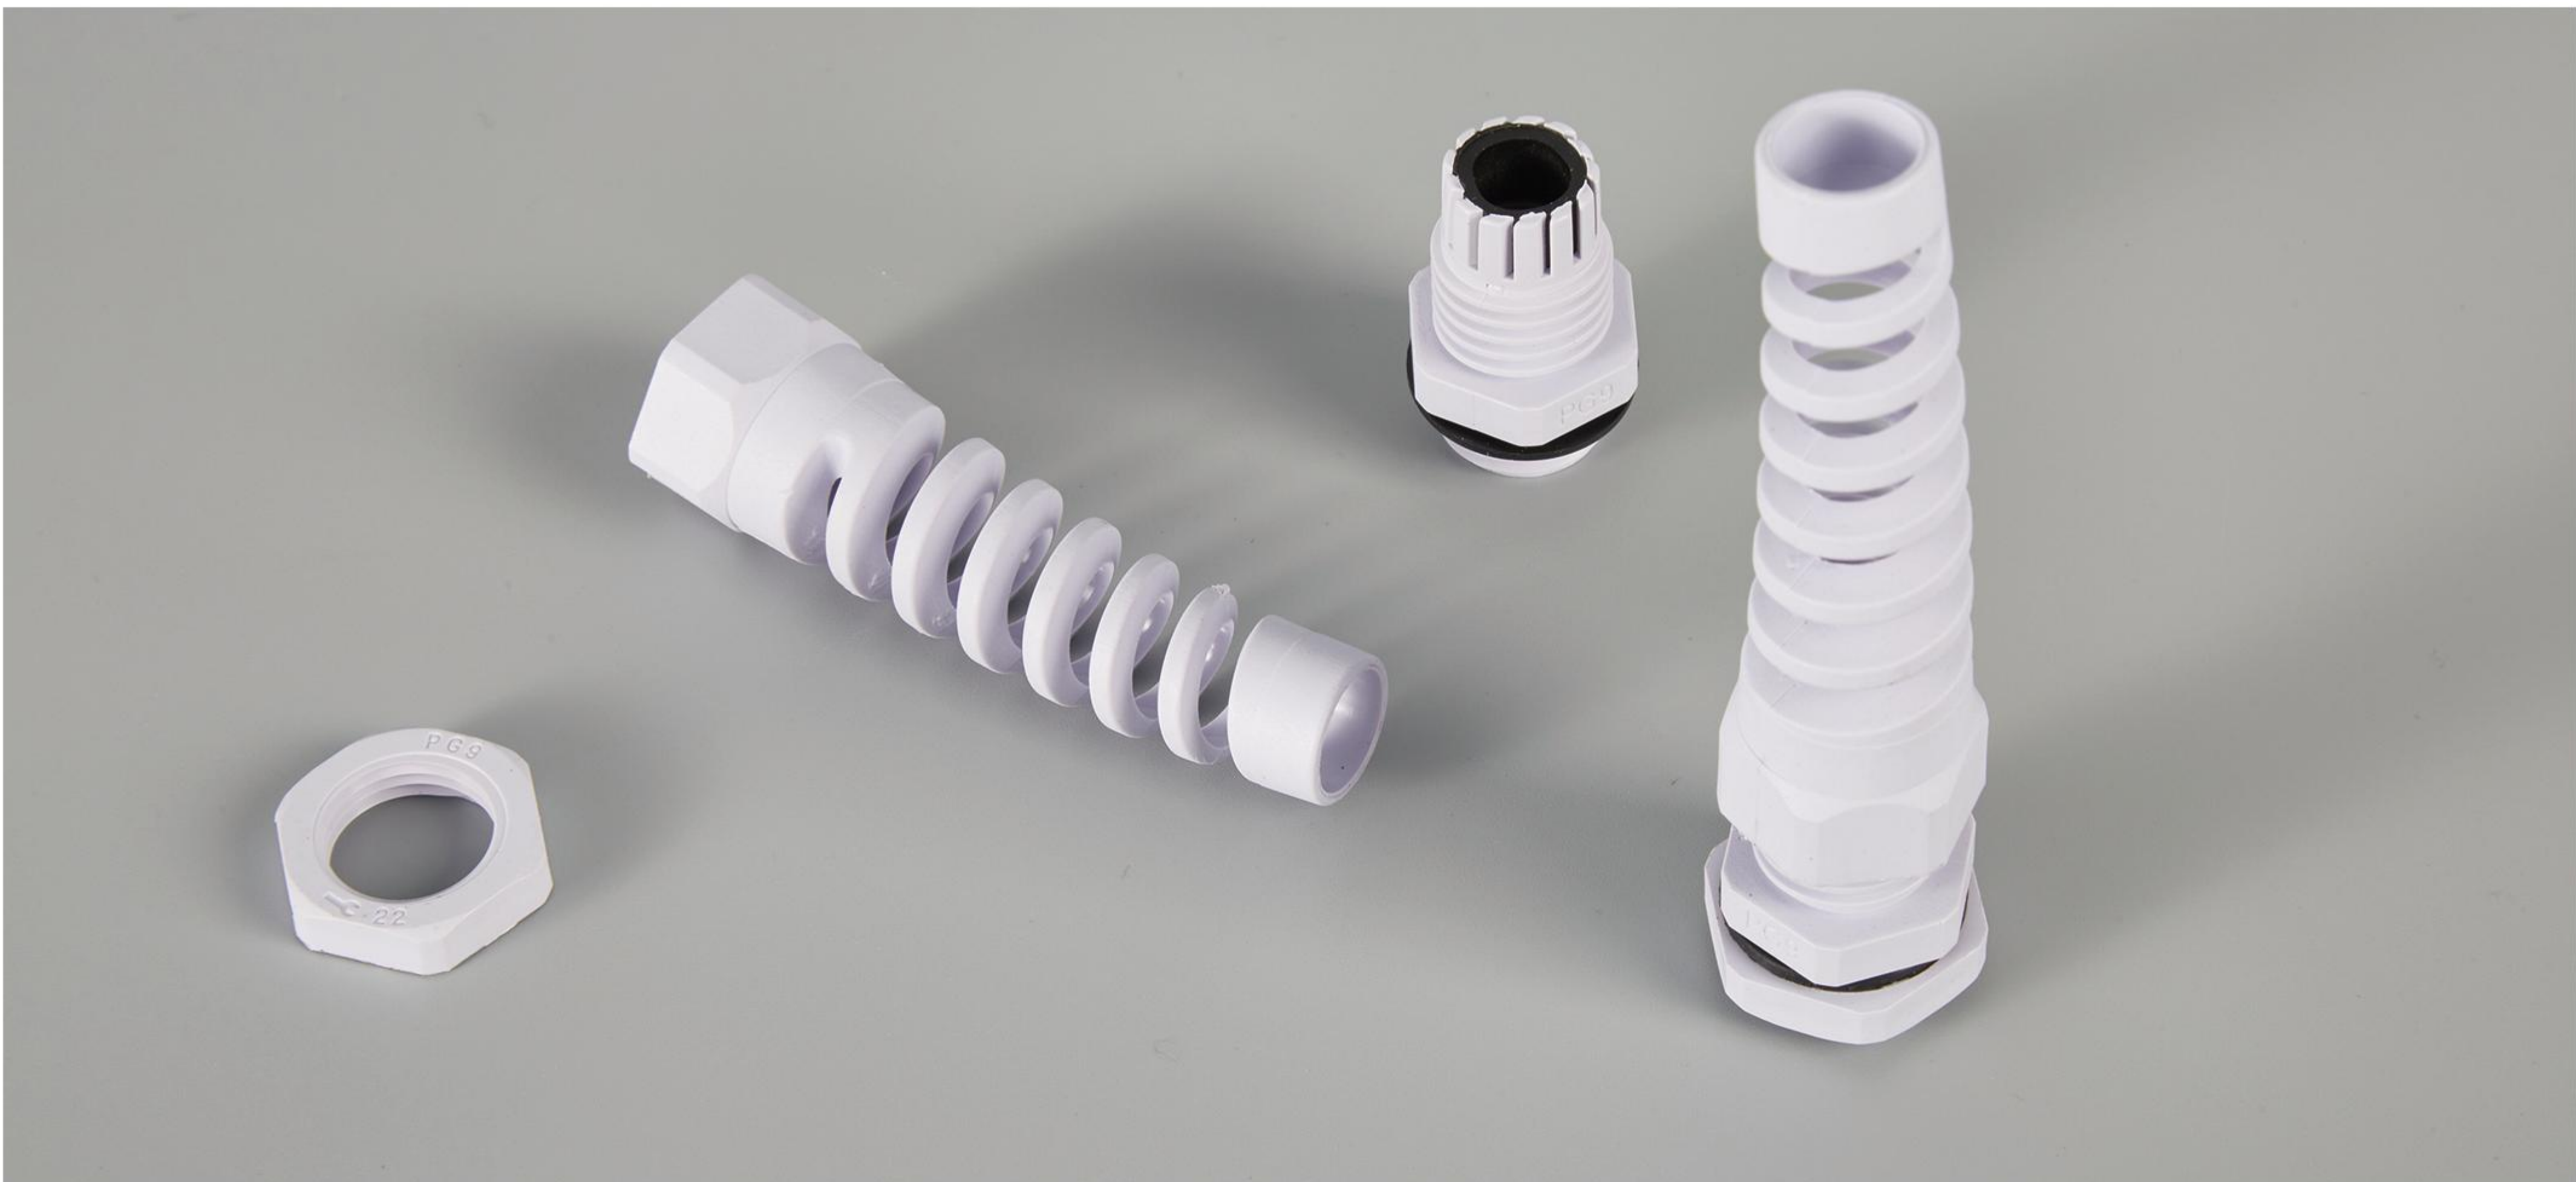

螺旋式电缆接头 Sprial Cable Glands

- 1、Features: The spiral lengthened design can effectively prevent the cable from being damaged and broken when it is bent. Anti-Acid, Anti-erosion, waterproof and dust-proof, not easy to get aging.
- 2、Material: Body and nut (Part A C E) are made of 100% fresh Nylon material (PP material can be customized), washer and seal (Part B D) are made of EPDM rubber.
- 3、Waterproof Rating: IP68.
- 4、Flammability: UL 94V-2.
- 5、Working temperature: -40°C to 100°C.
- 6、Color: Black, White-Grey, other colors are available as requested.

- 1、特点：螺旋加长设计，能有效防止电缆在弯曲时受损或断裂，耐酸、耐腐蚀、防水防尘、不易老化。
- 2、材质：主体和螺母（A、C、E部分）由100%全新尼龙料制成(可定制PP材质)，垫圈和密封件（B、D部分）采用EPDM橡胶制成。
- 3、防水等级：IP68。
- 4、阻燃等级：UL 94V-2。
- 5、工作温度：-40°C至100°C。
- 6、颜色：黑色、白灰色，其他颜色可按要求提供

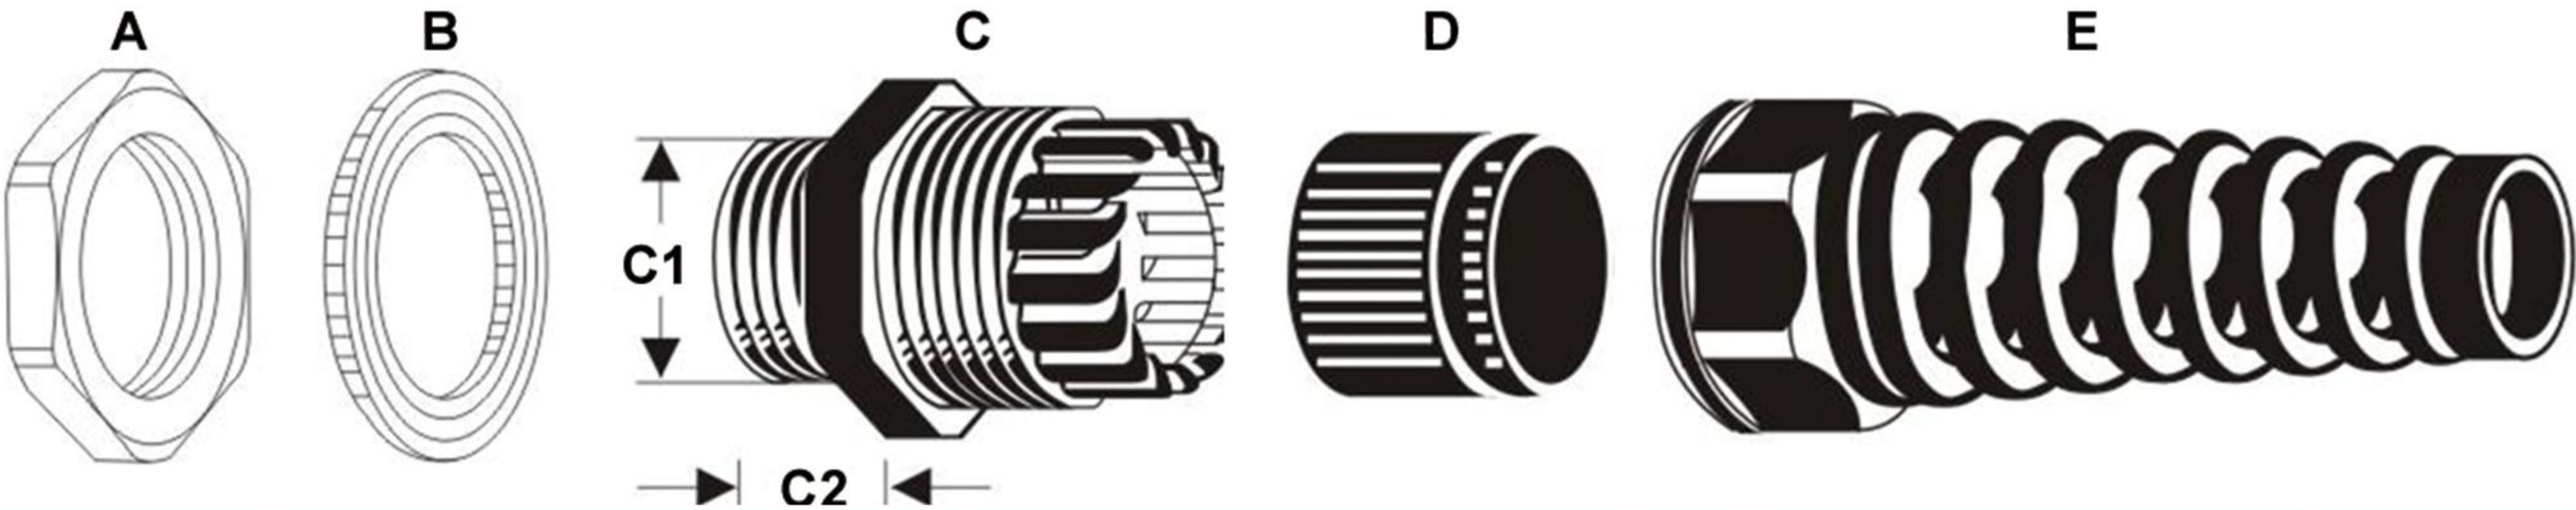

| Item No. | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|          | mm                   | inch      | mm                | inch | mm              | inch |              |
| PG7      | 3-6.5                | 0.12-0.25 | 8                 | 0.31 | 12.5            | 0.49 | 16           |
| PG7T     | 2-5                  | 0.08-0.2  | 8                 | 0.31 | 12.5            | 0.49 | 16           |
| PG9      | 4-8                  | 0.16-0.31 | 8                 | 0.31 | 15.2            | 0.6  | 19           |
| PG9T     | 2-6                  | 0.08-0.24 | 8                 | 0.31 | 15.2            | 0.6  | 19           |
| PG11     | 5-10                 | 0.2-0.39  | 8                 | 0.31 | 18.6            | 0.73 | 22           |
| PG11T    | 3-7                  | 0.12-0.27 | 8                 | 0.31 | 18.6            | 0.73 | 22           |
| PG13.5   | 6-12                 | 0.24-0.47 | 9                 | 0.35 | 20.4            | 0.8  | 24           |
| PG13.5T  | 5-9                  | 0.2-0.35  | 9                 | 0.35 | 20.4            | 0.8  | 24           |



| Item No. | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|          | mm                   | inch      | mm                | inch | mm              | inch | mm           |
| PG13.5T  | 5-9                  | 0.2-0.35  | 9                 | 0.35 | 20.4            | 0.8  | 24           |
| PG16     | 10-14                | 0.4-0.55  | 10                | 0.39 | 22.5            | 0.89 | 27           |
| PG16T    | 7-12                 | 0.28-0.47 | 10                | 0.39 | 22.5            | 0.89 | 27           |
| PG19     | 11-15                | 0.43-0.59 | 10                | 0.39 | 24              | 0.94 | 27           |
| PG19T    | 10-13                | 0.39-0.51 | 10                | 0.39 | 24              | 0.94 | 27           |
| PG21     | 13-18                | 0.51-0.71 | 10                | 0.39 | 28.3            | 1.11 | 33           |
| PG21T    | 9-16                 | 0.35-0.63 | 10                | 0.39 | 28.3            | 1.11 | 33           |
| M12x1.5  | 3-6.5                | 0.12-0.25 | 8                 | 0.31 | 12              | 0.47 | 16           |
| M12x1.5T | 2-5                  | 0.08-0.2  | 8                 | 0.31 | 12              | 0.47 | 16           |
| M16x1.5  | 4-8                  | 0.16-0.31 | 8                 | 0.31 | 16              | 0.63 | 19           |
| M16x1.5T | 2-6                  | 0.08-0.24 | 8                 | 0.31 | 16              | 0.63 | 19           |
| M18x1.5  | 5-10                 | 0.2-0.39  | 8                 | 0.31 | 18              | 0.71 | 22           |
| M18x1.5T | 3-7                  | 0.12-0.27 | 8                 | 0.31 | 18              | 0.71 | 22           |
| M20x1.5  | 6-12                 | 0.24-0.47 | 9                 | 0.35 | 20              | 0.79 | 24           |
| M20x1.5T | 5-9                  | 0.2-0.35  | 9                 | 0.35 | 20              | 0.79 | 24           |
| M22x1.5  | 10-14                | 0.4-0.55  | 10                | 0.39 | 22              | 0.87 | 27           |
| M22x1.5T | 7-12                 | 0.28-0.47 | 10                | 0.39 | 22              | 0.87 | 27           |
| M24x1.5  | 11-15                | 0.43-0.59 | 10                | 0.39 | 24              | 0.94 | 27           |
| M24x1.5T | 10-13                | 0.39-0.51 | 10                | 0.39 | 24              | 0.94 | 27           |
| M25x1.5  | 13-18                | 0.51-0.71 | 10                | 0.39 | 25              | 0.98 | 33           |
| M25x1.5T | 9-16                 | 0.35-0.63 | 10                | 0.39 | 25              | 0.98 | 33           |
| M32x1.5  | 16-20                | 0.63-0.79 | 12                | 0.47 | 32              | 1.26 | 35           |
| M32x1.5T | 13-18                | 0.51-0.71 | 12                | 0.47 | 32              | 1.26 | 35           |
| G3/8     | 6-10                 | 0.24-0.39 | 10                | 0.39 | 16.7            | 0.66 | 22           |
| G3/8T    | 4-7                  | 0.16-0.27 | 10                | 0.39 | 16.7            | 0.66 | 22           |
| G1/2     | 7-12                 | 0.28-0.47 | 10                | 0.39 | 21              | 0.83 | 24           |
| G1/2T    | 5-9                  | 0.2-0.35  | 10                | 0.39 | 21              | 0.83 | 24           |
| G3/4     | 12-18                | 0.47-0.71 | 12                | 0.47 | 26.5            | 1.04 | 33           |
| G3/4T    | 11-16                | 0.43-0.63 | 12                | 0.47 | 26.5            | 1.04 | 33           |
| NPT3/8   | 6-10                 | 0.24-0.39 | 10                | 0.39 | 16.7            | 0.66 | 22           |
| NPT3/8T  | 4-7                  | 0.16-0.27 | 10                | 0.39 | 16.7            | 0.66 | 22           |
| NPT1/2   | 7-12                 | 0.28-0.47 | 10                | 0.39 | 21              | 0.83 | 24           |
| NPT1/2T  | 5-9                  | 0.2-0.35  | 10                | 0.39 | 21              | 0.83 | 24           |
| NPT3/4   | 12-18                | 0.47-0.71 | 15                | 0.59 | 26.5            | 1.04 | 33           |
| NPT3/4T  | 11-16                | 0.43-0.63 | 15                | 0.59 | 26.5            | 1.04 | 33           |






不锈钢&黄铜接头 Stainless Steel&Brass Cable Glands

- 1、Features: The claws and seals with unique design can hold cable firmly and has a wider cable range. Anti-Acid, Anti-erosion, waterproof and dust-proof, not easy to get aging.
- 2、Material: Body and nut (Part A C E F) are made of Stainless Steel 304/316 (or nickel plated brass), washer and seal (Part B D) are made of EPDM rubber.
- 3、Waterproof Rating: IP68.
- 4、Flammability: UL 94V-2.
- 5、Working temperature: -40°C to 100°C.
- 6、Color: Steel.

- 1、特点：独特的夹紧爪和垫片设计使得线缆连接更紧固，范围更大，耐酸、耐腐蚀、防水防尘、不易老化。
- 2、材质：主体和螺母（A、C、E、F部分）由304/316不锈钢（或黄铜镀镍）制成，垫圈和密封件（B、D部分）采用EPDM橡胶制成。
- 3、防水等级：IP68。
- 4、阻燃等级：UL 94V-2。
- 5、工作温度：-40°C至100°C。
- 6、颜色：金属色。

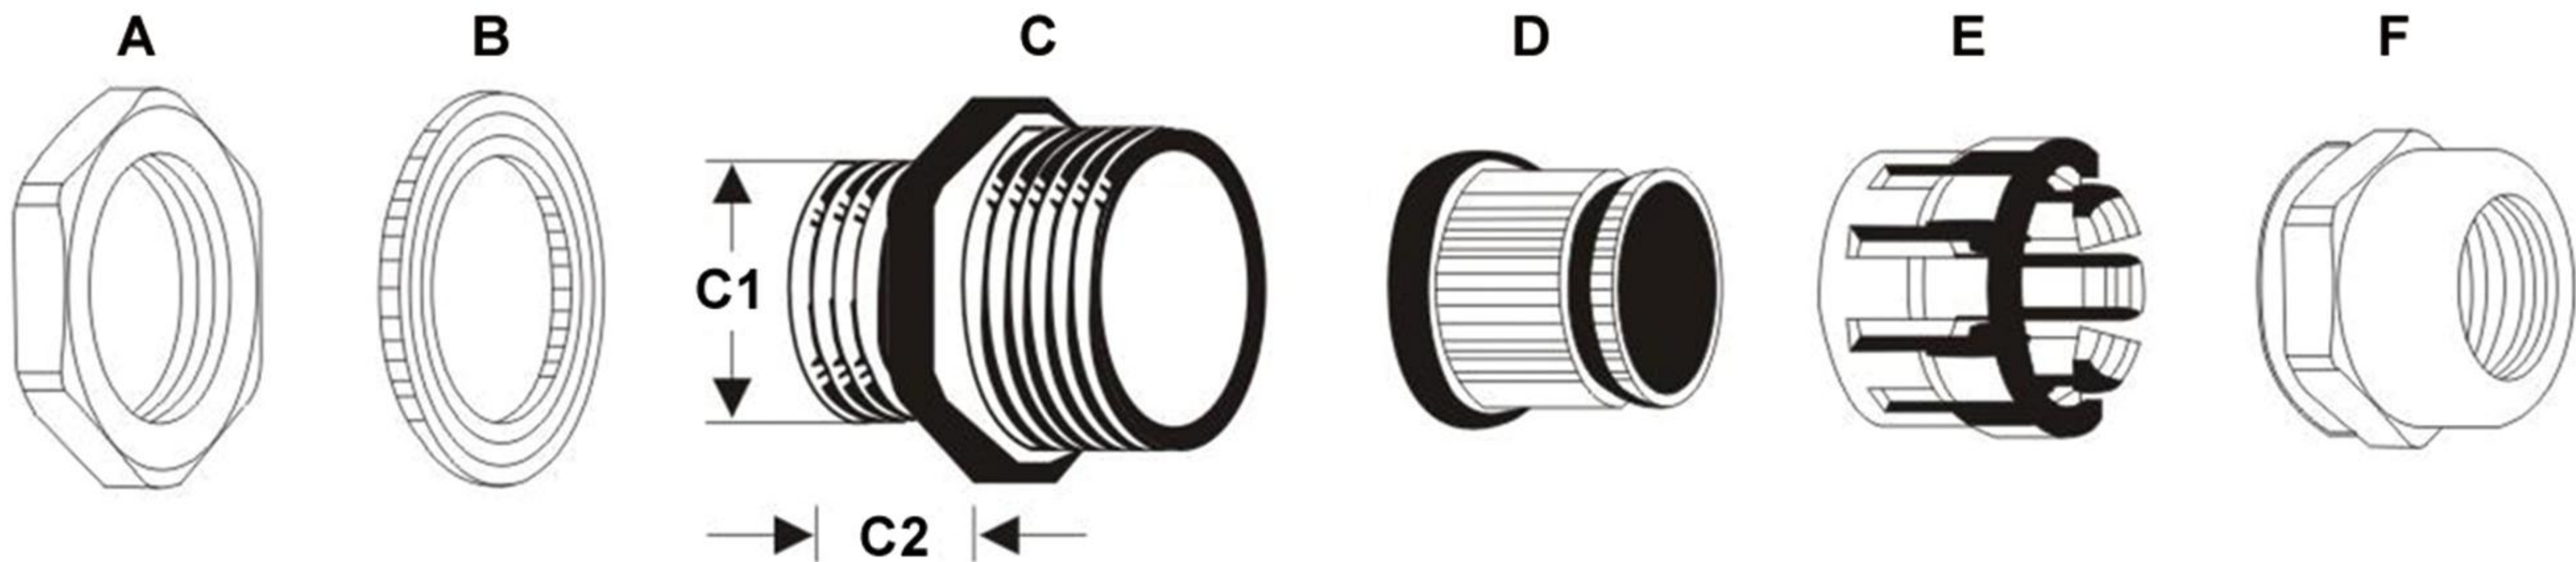

| Item No. | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|          | mm                   | inch      | mm                | inch | mm              | inch | mm           |
| PG7      | 3-6.5                | 0.12-0.25 | 7                 | 0.28 | 12.5            | 0.49 | 14           |
| PG9      | 4-8                  | 0.16-0.31 | 8                 | 0.31 | 15.2            | 0.6  | 18           |
| PG11     | 5-10                 | 0.2-0.39  | 8                 | 0.31 | 18.6            | 0.73 | 20           |
| PG13.5   | 6-12                 | 0.24-0.47 | 8                 | 0.31 | 20.4            | 0.8  | 22           |
| PG16     | 10-14                | 0.4-0.55  | 8                 | 0.31 | 22.5            | 0.89 | 24           |
| PG19     | 12-16                | 0.47-0.63 | 9                 | 0.35 | 24              | 0.94 | 27           |
| PG21     | 13-18                | 0.51-0.71 | 9                 | 0.35 | 28.3            | 1.11 | 30           |
| PG25     | 16-20                | 0.63-0.79 | 10                | 0.39 | 30              | 1.18 | 35           |





| Item No. | Suitable cable range |           | Thread Length(C2) |      | Thread Dia.(C1) |      | Spanner Size |
|----------|----------------------|-----------|-------------------|------|-----------------|------|--------------|
|          | mm                   | inch      | mm                | inch | mm              | inch | mm           |
| PG29     | 18-25                | 0.71-0.98 | 11                | 0.43 | 37              | 1.46 | 40           |
| PG36     | 25-32                | 0.98-1.26 | 11                | 0.43 | 47              | 1.85 | 50           |
| PG42     | 32-38                | 1.26-1.5  | 12                | 0.47 | 54              | 2.13 | 57           |
| PG48     | 37-44                | 1.46-1.73 | 13                | 0.51 | 59.3            | 2.33 | 65           |
| PG63     | 42-50                | 1.65-1.97 | 15                | 0.59 | 71              | 2.8  | 76           |
| M8x1.5   | 2-5                  | 0.08-0.2  | 6                 | 0.24 | 8               | 0.31 | 12           |
| M10x1.5  | 3-6.5                | 0.12-0.25 | 7                 | 0.28 | 10              | 0.39 | 14           |
| M12x1.5  | 3-6.5                | 0.12-0.25 | 7                 | 0.28 | 12              | 0.47 | 14           |
| M16x1.5  | 4-8                  | 0.16-0.31 | 8                 | 0.31 | 16              | 0.63 | 18           |
| M18x1.5  | 5-10                 | 0.2-0.39  | 8                 | 0.31 | 18              | 0.71 | 20           |
| M20x1.5  | 6-12                 | 0.24-0.47 | 8                 | 0.31 | 20              | 0.79 | 22           |
| M22x1.5  | 10-14                | 0.4-0.55  | 8                 | 0.31 | 22              | 0.87 | 24           |
| M24x1.5  | 12-16                | 0.47-0.63 | 9                 | 0.35 | 24              | 0.94 | 27           |
| M25x1.5  | 13-18                | 0.51-0.71 | 9                 | 0.35 | 25              | 0.98 | 27           |
| M32x1.5  | 16-20                | 0.63-0.79 | 10                | 0.39 | 32              | 1.26 | 35           |
| M36x1.5  | 18-25                | 0.71-0.98 | 10                | 0.39 | 36              | 1.42 | 40           |
| M40x1.5  | 22-30                | 0.87-1.18 | 11                | 0.43 | 40              | 1.57 | 45           |
| M50x1.5  | 32-38                | 1.26-1.5  | 12                | 0.47 | 50              | 1.97 | 58           |
| M60x1.5  | 37-44                | 1.46-1.73 | 13                | 0.51 | 60              | 2.36 | 65           |
| M63x1.5  | 37-44                | 1.46-1.73 | 13                | 0.51 | 63              | 2.48 | 68           |
| M72x1.5  | 46-52                | 1.81-2.15 | 15                | 0.59 | 72              | 2.83 | 75           |
| M80x1.5  | 56-62                | 2.2-2.44  | 16                | 0.63 | 80              | 3.15 | 85           |

