

△ 本广告资料由牛利电气印制，仅用于说明本系列产品的相关信息。牛利电气随时可能因技术升级或采用更新的生产工艺而改进本手册有关内容，或对本手册的印刷错误及不准确的信息进行必要的改进或更改，恕不另行通知。商家订货时请随时联系本公司，以证实相关信息。
We reserve the right to make technical changes or modify the contents of this document without prior notice. All the agreed particulars shall prevail. All Right Reserved

♻️ 采用环保纸印刷
Use of environmentally friendly printing paper

© 浙江牛利电气有限公司版权所有
ZHEJIANG NIULI ELECTRIC CO.,LTD. All Right Reserved



NLZD® 牛利 浙江牛利电气有限公司
ZHEJIANG NIULI ELECTRIC CO.,LTD.

Add: Mushanhou Village, Liushi Town, Yueqing city,
Wenzhou 325604 China
Tel: +86 0577 62696950
Fax: +86 0577 62698650
Email: niuli01@zjnlzd.cn
Wed: www.zjnlzd.cn

地址: 浙江省乐清市柳市镇木山后五二一路5弄3号
浙江省乐清市经济开发区纬五路187号(生产基地)
电话: 0577-62696950
传真: 0577-62698650
邮箱: niuli01@zjnlzd.cn
网址: www.zjnlzd.cn



Visit Official Website
扫一扫访问官网

诚信·专业·高效·共赢

NLZD® 牛利

PRODUCT SELECTION GUIDE
2018产品选型手册



浙江牛利电气有限公司
ZHEJIANG NIULI ELECTRIC CO.,LTD.



专业
Professional

高效
Efficient

企业文化
CORPORATION SPIRIT

诚信
Honest

共赢
Cooperative

CORPORATION SPIRIT
企业文化

品牌定位

专注设计优秀产品，铸造牛利专业品牌

企业口号

团结协作，勇于创新，追求卓越

合作精神

人为尊、德为本、诚则信、精则赢

企业价值观

诚信、专业、高效、共赢

关于牛利

ABOUT NIULI

www.zjnlzd.cn

Zhejiang Niuli Electric Co. Ltd. is a leading, full-line manufacturer of wiring accessories with own registered brand NLZD. Main products are nylon cable ties, cable glands, cable clips, Stainless steel cable ties, wall plugs, etc.

Now the company has over 100 employees, 28 producing lines and 3000 square meters of factory, as well as can independently develop, design, manufacture and test products. Located in Yueqing of China, near Port Ningbo, it is very convenient to provide customers fast shipping and timely sales service. The NLZD cable ties are made from 100% fresh nylon PA 6/6 imported from USA, which tensile strength is far beyond the international standard. So far they have certified by UL, CE, ROHS, SGS etc.

Since insisting on the mission of good quality and efficient service, we have not only caught good Chinese market, but also established good partnership with overseas wholesalers. Now we supply products to thousands of online sellers like Amazon, ebay, and also design customized products for users in the electronics and automobile industries. Welcome cooperation and Welcome visiting factory any time!

浙江牛利电气有限公司是一家领先的全系列扎带及电缆配件供应商，并拥有注册品牌NLZD。公司创立于中国电气之都——浙江乐清柳市镇，受益于地区发达的行业产业链和便利的交通，牛利电气经过不断扩大生产规模和充实人才队伍，拥有了独立的研发、设计、制造、测试能力和及时高效的海内外销售及售后服务能力，更为电子，汽车，农业等领域用户提供了数种定制化产品。

在激烈的市场竞争中，牛利始终坚持忠于客户，忠于产品，选用优质的进口原料，严格按照ISO标准生产。NLZD产品相继通过了CE, ROHS, UL等国际认证，以可靠的产品质量和多元化的服务赢得了众多海内外批发商，工业用户以及广大终端消费者的肯定。在高速发展的互联网时代，公司管理团队勇于探索，不断创新，优化销售与管理思路，与合作伙伴及时分享信息协同共进，不仅建立了深厚的合作关系更是打造了线上线下一体化的市场服务体系。

不懈追求，勇于创新，经过一代代牛利人的艰苦奋斗 NLZD 品牌形象日益提升。在未来发展中，将继续坚持牛利精神，力创一片合作共赢的美好局面!



LEADING FUTURE
-To be the wiring accessories expert

资质证书

QUALIFICATION CERTIFICATE

我们全面发展质量管理体系，与企业技术标准、管理标准、工作标准并重；创新企业标准化工作新模式。使牛利标准化工作得到了长足的延伸和发展。我们更用心，让客户更满意。



Report Reference	Product Name	Test Results	Compliance
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS
EN 60275	Cable management systems - Cable ties for electrical installations	Pass	UL, CE, RoHS

产品目录

PRODUCT CATALOG

www.zjnlzd.cn

A
01-12



尼龙扎带
Nylon Cable Ties

B
13-18



不锈钢扎带
Stainless Steel Cable Ties

C
19-28



电缆接头及防水盒
Cable Glands & Waterproof Junction Box

D
29-38



布线配件
Wiring Accessories

尼龙扎带系列

Nylon Cable Ties



Nylon Cable Ties 尼龙扎带





Self-Locking Cable Ties 自锁式尼龙扎带



Material: UL approved Nylon 66, Flammability 94V-2;
Color: Standard color is natural, UV resistant black and other special colors are available upon request;
Operating temperature: -35°C to 85°C (-35°F to 185°F), Special heat or ice resistant ties are available upon request;
Certificates: UL, CE, ROHS, SGS;
Feature: Eco-friendly, good tensile strength and insulation, acid and alkali resistant, not easy to get aging.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2;
颜色: 标准颜色为白色, 抗紫外线之黑色, 特殊颜色欢迎定做;
操作温度: -35°C to 85°C (-35°F to 185°F), 特殊耐寒耐高温扎带可以定做;
国际认证: UL, CE, ROHS, SGS;
产品特性: 产品环保, 可在工业, 日常生活中广泛应用, 绝缘性好, 承受力强, 耐酸碱, 不易老化。

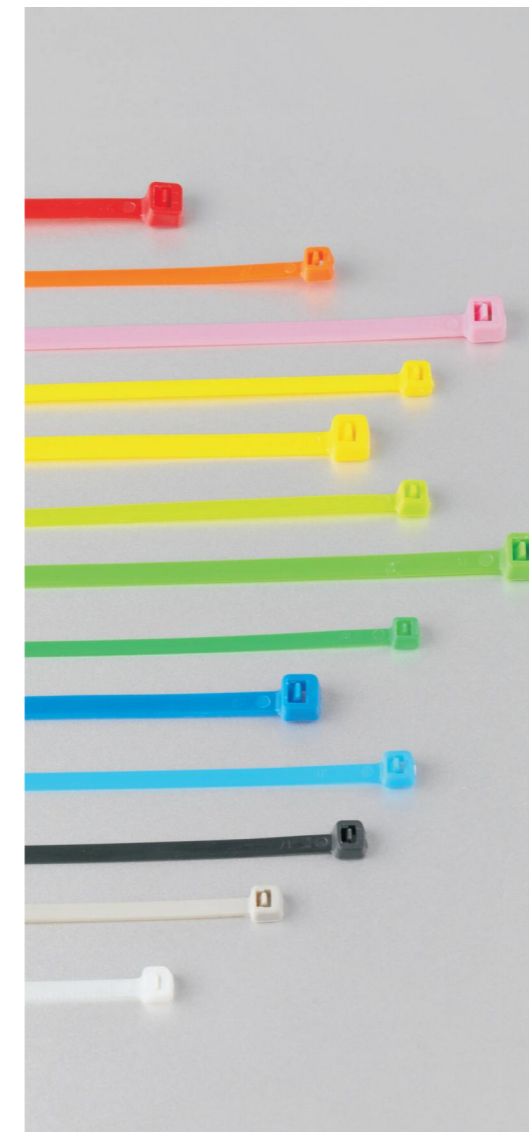


类别 Type	型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
		inch	mm			LBS	kgs
Miniture	NL-3x80	3-3/16"	80	2.5	2-16	18	8
	NL-3x100	4"	100	2.5	2-22	18	8
	NL-3x150	6"	150	2.5	2-35	18	8
Intermediate	NL-3x200	8"	200	2.5	2-50	18	8
	NL-4x120	4-3/4"	120	3.6	2-30	40	18
	NL-4x150	6"	150	3.6	3-35	40	18
	NL-4x200	8"	200	3.6	3-50	40	18
	NL-4x250	10"	250	3.6	3-65	40	18
	NL-4x300	11-5/8"	300	3.6	3-80	40	18
	NL-4x350	13-3/4"	350	3.6	3-90	40	18
Standard	NL-4x370	14-1/4"	370	3.6	3-102	40	18
	NL-5x150	6"	150	4.8	3-35	50	22
	NL-5x200	8"	200	4.8	3-50	50	22
	NL-5x250	10"	250	4.8	3-65	50	22
	NL-5x300	11-5/8"	300	4.8	3-80	50	22
	NL-5x350	13-3/4"	350	4.8	3-90	50	22
	NL-5x380	15"	380	4.8	3-102	50	22
	NL-5x400	15-3/4"	400	4.8	3-105	50	22
	NL-5x450	17-3/4"	450	4.8	3-130	50	22
	NL-5x500	19-11/16"	500	4.8	3-150	50	22
NL-5x550	21-1/16"	550	4.8	3-160	50	22	




Self-Locking Cable Ties
自锁式尼龙扎带

Material: UL approved Nylon 66, Flammability 94V-2;
Color: Standard color is natural, UV resistant black and other special colors are available upon request;
Operating temperature: -35°C to 85°C (-35°F to 185°F), Special Heat or ice resistant ties are available upon request;
Certificates: UL, CE, ROHS, SGS;
Feature: Eco-friendly, good tensile strength and insulation, acid and alkali resistant, not easy to get aging.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2;
颜色: 标准颜色为白色, 抗紫外线之黑色, 特殊颜色欢迎定做。
操作温度: -35°C to 85°C (-35°F to 185°F), 特殊耐寒耐高温扎带可以定做;
国际认证: UL, CE, ROHS, SGS;
产品特性: 产品环保, 可在工业, 日常生活中广泛应用, 绝缘性好, 承受力强, 耐酸碱, 不易老化。

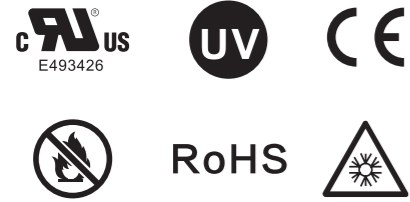

类别 Type	型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
		inch	mm			LBS	kgs
Heavy Duty	NL-8x200	8"	200	7.6	3-50	120	55
	NL-8x250	10"	250	7.6	4-65	120	55
	NL-8x300	11-5/8"	300	7.6	4-80	120	55
	NL-8x350	13-3/4"	350	7.6	4-90	120	55
	NL-8x380	15"	380	7.6	4-102	120	55
	NL-8x400	15-3/4"	400	7.6	4-105	120	55
	NL-8x450	17-3/4"	450	7.6	4-130	120	55
	NL-8x500	19-11/16"	500	7.6	4-150	120	55
	NL-8x550	21-1/16"	550	7.6	4-160	120	55
	NL-10x400	15-3/4"	400	8.8	4-105	175	80
	NL-10x450	17-3/4"	450	8.8	4-130	175	80
	NL-10x500	19-11/16"	500	8.8	4-150	175	80
	NL-10x550	21-1/16"	550	8.8	8-160	175	80
	NL-10x600	23-5/8"	600	8.8	8-170	175	80
	NL-10x650	25-9/16"	650	8.8	8-190	175	80
	NL-10x720	28-1/3"	720	8.8	10-210	175	80
	NL-10x760	30"	760	8.8	10-225	175	80
	NL-10x800	31-1/2"	800	8.8	10-235	175	80
	NL-10x850	33-1/2"	850	8.8	10-250	175	80
	NL-10x900	35-2/5"	900	8.8	10-260	175	80
NL-10x1000	39-2/5"	1000	8.8	10-295	175	80	
NL-10x1200	47-1/5"	1200	8.8	10-340	175	80	
NL-12x650	25-9/16"	650	12	12-190	250	114	
NL-12x760	30"	760	12	12-220	250	114	




Self-Locking Cable Ties
自锁式尼龙扎带

Material: UL approved Nylon 66, Flammability 94V-2;
Color: Standard color is natural, UV resistant black and other special colors are available upon request;
Operating temperature: -35°C to 85°C (-35°F to 185°F), Special Heat or ice resistant ties are available upon request;
Certificates: UL, CE, ROHS, SGS;
Feature: Eco-friendly, good tensile strength and insulation, acid and alkali resistant, not easy to get aging.


材质: 采用UL认可的尼龙66料制成, 防火等级94V-2;
颜色: 标准颜色为白色, 抗紫外线之黑色, 特殊颜色欢迎定做。
操作温度: -35°C to 85°C (-35°F to 185°F), 特殊耐寒耐高温扎带可以定做;
国际认证: UL, CE, ROHS, SGS;
产品特性: 产品环保, 可在工业, 日常生活中广泛应用, 绝缘性好, 承受力强, 耐酸碱, 不易老化。



类别 Type	型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
		inch	mm			LBS	kgs
New NLZD Size	NL-1.9X80	3-3/16"	80	1.9	2-16	14	6.5
	NL-1.9X100	4"	100	1.9	2-22	14	6.5
	NL-1.9X150	6"	150	1.9	2-35	14	6.5
	NL-1.9X200	8"	200	1.9	2-53	14	6.5
	NL-2.7x200	8"	200	2.7	2-53	33	15
	NL-2.7x250	10"	250	2.7	2-65	33	15
	NL-2.7x300	11-5/8"	300	2.7	2-80	33	15
	NL-3.0*150	6"	150	3.0	2-35	40	18
	NL-3.0*200	8"	200	3.0	2-53	40	18
	NL-3.0*250	10"	250	3.0	2-65	40	18
	NL-3.0*300	11-5/8"	300	3.0	2-80	40	18
	NL-5.2x200	8"	200	5.2	4-53	78	35
	NL-5.2x250	10"	250	5.2	4-65	78	35
	NL-5.2x300	11-5/8"	300	5.2	4-82	78	35
	NL-5.2x350	13-3/4"	350	5.2	4-90	78	35
	NL-5.2x400	15-3/4"	400	5.2	4-108	78	35
	NL-5.2x450	17-3/4"	450	5.2	4-130	78	35
	NL-5.2x500	19-11/16"	500	5.2	4-150	78	35
	NL-5.8x200	8"	200	5.8	6-53	88	40
	NL-5.8x250	10"	250	5.8	6-65	88	40
NL-5.8x300	11-5/8"	300	5.8	6-82	88	40	
NL-5.8x350	13-3/4"	350	5.8	6-90	88	40	
NL-5.8x400	15-3/4"	400	5.8	6-108	88	40	
NL-5.8x450	17-3/4"	450	5.8	6-130	88	40	
NL-5.8x500	19-11/16"	500	5.8	6-150	88	40	



Releasable Cable Ties
可松式扎带




Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is natural, UV resistant black and other special colors are available upon request;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: CE, ROHS, SGS;
Feature: Easy to secure and reuse these cable ties multiple times using the simple trigger release system.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为白色, 抗紫外线之黑色, 特殊颜色欢迎定做;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: CE, ROHS, SGS;
产品特性: 可以轻松自由调节捆绑直径和解开扎带, 方便重复多次使用。



型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. loop Tensile Strength	
	inch	mm			LBS	kgs
NL-5x200RT	8"	200	4.8	50	50	22
NL-8x150RT	6"	150	7.2	35	75	34
NL-8x200RT	8"	200	7.2	50	75	34
NL-8x250RT	10"	250	7.4	66	75	34
NL-8x300RT	11-5/8"	300	7.4	83	75	34
NL-8x350RT	13-3/4"	350	7.4	90	75	34
NL-8x400RT	15"	400	7.4	105	75	34
NL-8x450RT	15-3/4"	450	7.4	130	75	34
NL-15x240RT	17-3/4"	240	15	15	110	50

In-line Cable Ties
平扣扎带




Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: a wide range of 17 colors;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: In-line 180° entry, low profile design reduces jutting sharp edges which make the ties perfect for children's playground.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 17种颜色可选;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 扎带头尾呈180度的扣入角度, 无尖锐的边沿, 具有良好的安全保护功能, 适用于儿童游乐场。




型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. loop Tensile Strength	
	inch	mm			LBS	kgs
NL-8 x350IT	13-3/4"	350	7.2	98	115	50
NL-8 x400IT	15-3/4"	400	7.4	105	115	50

ID Identify Cable Ties
标牌扎带




Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is natural, other colorful ties can be customized;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: Blank flag marker ties are perfect for use on wires, cables, pipes, and valves, as well as for machine and equipment identification, inventory control, and much more.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为白色, 其他颜色可以定做;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 空白标牌和扎带一体化设计适用于各种线缆, 管道阀门, 机器, 设备的识别以及仓库管理等。

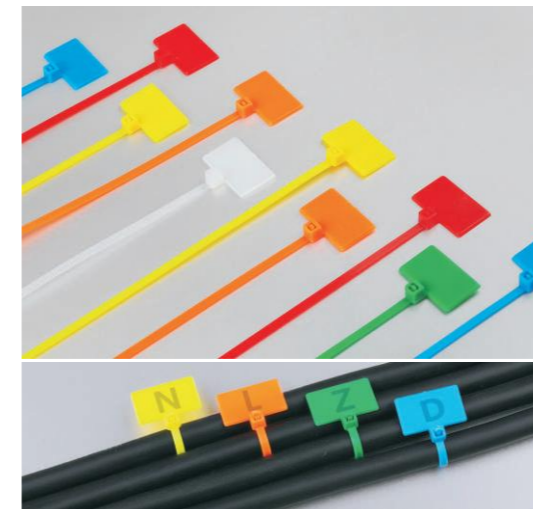

型号 Item NO.	长L Length		宽W Width	标牌尺寸 Flag Size	捆扎范围E Bundle Dia.	拉力 Min. loop Tensile Strength	
	inch	mm				LBS	kgs
NL-3X100MT	4"	100	2.5	13*20	22	18	8
NL-4X150MT	6"	150	3.6	15*25	35	55	25
NL-4X200MT	8"	200	3.6	15*25	50	55	25

Screw Mount Cable Ties
固定头扎带




Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is natural, other colorful ties can be customized;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: The mountable head cable ties can help to attach the secured cable bundle to any surface like communication racks, walls, or ceiling.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为白色, 其他颜色可以定做;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 固定头扎带可以捆扎电缆并直接固定到机架、墙壁和其他安装面板。



型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. loop Tensile Strength	
	inch	mm			LBS	kgs
NL-4x100HT	4"	100	3.6	22	40	18
NL-4 x150HT	6"	150	3.6	35	40	18
NL-4 x200HT	8"	200	3.6	50	40	18
NL-5x200HT	8"	200	4.8	50	50	22
NL-5x250HT	10"	250	4.8	65	50	22
NL-5x300HT	12"	300	4.8	80	50	22
NL-8x380HT	15"	380	7.6	98	120	55

Push Mount Cable Ties
插销扎带

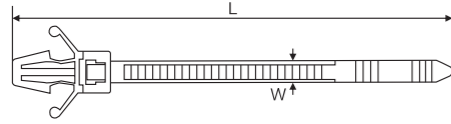


Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is natural, other colorful ties can be customized;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: Push-mount cable ties snap quickly into a hole to attach a bundle to another surface, Widely used in automotive industry.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为白色, 其他颜色可以定做;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 插销扎带可以将头部卡扣插入对应安装孔里, 起到捆绑和固定线束的作用, 在汽车和自动化行业广泛应用。



型号 Item NO.	长L Length		宽W Width mm	捆扎范围E Bundle Dia. mm	拉力 Min. Loop Tensile Strength	
	inch	mm			LBS	kgs
NL-3X100PT	4"	100	2.5	22	18	8
NL-3.6X150PT	6"	150	3.6	35	40	18
NL-3.6X200PT	8"	200	3.6	50	40	18

Double Lock Ties
双扣扎带




Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is natural, other colorful ties can be customized;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: Double Locking Cable Ties are designed to form a more rounded shape around the cable bundle and avoid the teardrop effect of standard cable ties.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为白色, 其他颜色可以定做;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 双扣扎带设计可以使带尾部平行扣入两个紧扣, 使捆扎形状更接近圆形, 扎带承受力更强, 不易滑扣并且可以有效保护线缆。



型号 Item NO.	长L Length		宽W Width mm	捆扎范围E Bundle Dia. mm	拉力 Min. Loop Tensile Strength	
	inch	mm			LBS	kgs
NL-9x260DT	10-1/4"	260	8.5	66	110	50
NL-9x360DT	14"	360	8.5	90	110	50

Beaded Ties
珠孔扎带



Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is natural, other colorful ties can be customized;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: It is releasable and used for binding ordinary wires.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为白色, 其他颜色可以定做;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 一般电源线之绑扎, 可再松开重复使用。



型号 Item NO.	长L Length		捆扎范围E Bundle Dia. mm	包装 Packing pcs
	inch	mm		
NL-100BT	4"	100	25	100
NL-120BT	5"	120	30	100
NL-150BT	6"	150	39	100

Reversed Teeth Cable Ties
反扣扎带



Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is natural, other colorful ties can be customized;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: The reversed teeth cable ties can protect the jackets of your cables by having the teeth on the outside instead of rubbing against the cable.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为白色, 其他颜色可以定做;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 与传统自锁式扎带相比, 反扣扎带的齿面在反面, 可以有效避免线缆与齿面的摩擦引起的损伤。

型号 Item NO.	长L Length		宽W Width mm	捆扎范围E Bundle Dia. mm	拉力 Min. Loop Tensile Strength	
	inch	mm			LBS	kgs
NL-5x215OT	8-1/4"	215	5	50	77	35

Metal Inlay Cable Ties
金属嵌片扎带

Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Metal Inlay: stainless steel 304;
Color: Standard color is natural, other colorful ties can be customized;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: The metal inlay cables ties offer extreme strength and durability over standard nylon cable ties, which finely spaced gear rack allowing for exact adjustment ensuring a snug fit.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
金属嵌片: 304不锈钢;
颜色: 标准颜色为白色, 其他颜色可以定做;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 不锈钢扎带采用钢牙替代传统的塑牙, 拥有更好的稳定性和更高承受力, 扎带上点状结构可以有效防止扎带横向移动, 广泛适用于室内外多种场景。



型号 Item NO.	长L Length		宽W Width mm	捆扎范围E Bundle Dia. mm	拉力 Min. loop Tensile Strength	
	inch	mm			LBS	kgs
NL-3X100ST	4"	100	3	25	18	8
NL-4X150ST	6"	150	4	35	40	18
NL-4X200ST	8"	200	4	50	40	18
NL-5X250ST	10"	250	5	65	50	22
NL-5X300ST	12"	300	5	80	50	22
NL-8X145ST	5-11/16"	145	8	35	112	50
NL-8X175ST	6-7/8"	175	8	45	112	50
NL-8X200ST	8"	200	8	50	112	50
NL-8X240ST	9-1/2"	240	8	60	112	50
NL-8X300ST	12"	300	8	80	112	50
NL-8X400ST	15-3/4"	400	8	110	112	50
NL-10X300ST	11-5/8"	300	10	80	124	55
NL-10X350ST	13-3/4"	350	10	95	124	55
NL-10X400ST	15-3/4"	400	10	110	124	55
NL-10X450ST	17-3/4"	450	10	130	124	55
NL-10X550ST	21-1/16"	550	10	160	124	55
NL-10X600ST	23-5/8"	600	10	175	124	55

Plastic Nylon Hand Cuff
超大承受力尼龙手铐

Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is natural, other colorful ties can be customized;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: Plastic nylon handcuffs have 250lb extra strong tensile strength, UV resistance. These are the superior choice for Police, Security, or any application where someone needs to be restrained.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为白色, 抗紫外线之黑色;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 塑料尼龙手铐拥有114kg的最大拉力, 并且能抗紫外线, 不易老化, 质量轻巧方便携带, 是警察、保安或任何需要约束应用的最好选择工具。




型号 Item NO.	长L Length		厚T Thickness mm	宽W Width mm	捆扎范围E Bundle Dia. mm	拉力 Min. loop Tensile Strength	
	inch	mm				LBS	kgs
NL-12X700HF	27-1/2"	700	3	12	85	250	114

Plastic Car Tire Anti-skid Chain
汽车轮胎防滑链

Material: UL approved Nylon 66, Flammability 94V-2, good tensile strength, not easy to get aging;
Color: Standard color is orange;
Operating temperature: -35°C to 85°C (-35°F to 185°F);
Certificates: UL, CE, ROHS, SGS;
Feature: Car anti-skid chain is designed for automotive safety. They are more easy to carry and use than traditional metal chains.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2, 承受力强, 不易老化;
颜色: 标准颜色为橙色;
操作温度: -35°C to 85°C (-35°F to 185°F);
国际认证: UL, CE, ROHS, SGS;
产品特性: 汽车防滑链是为汽车安全用品而设计的, 表面特殊的粗糙结构可以有效增大轮胎与地面的摩擦力, 起到良好的防滑效果。相比传统的金属防滑链, 更方便携带和使用, 无需工具即可直接捆绑。

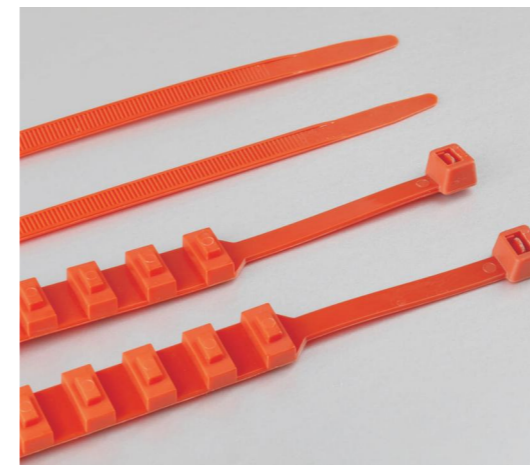

型号 Item NO.	长L Length		宽W Width mm	捆扎范围E Bundle Dia. mm	拉力 Min. loop Tensile Strength	
	inch	mm			LBS	kgs
NL-9X900CT	27-1/2"	900	9	251	175	80

Custom Packaging
定制包装OEM/ODM



Popular Packing
出口包装100/PCS



Popular Packing
吊卡包装



Rainbow Ties
彩虹扎带——五彩装



OPP Packing
OPP袋组合包装



Blister Packing
泡壳包装



NLZD Packing
牛利品牌包装

Custom Packaging
定制包装OEM/ODM

Value Packing
组合包装——桶装



不锈钢扎带系列

Stainless Steel Cable Ties
316/304/201




Stainless Steel Cable Ties 不锈钢扎带

NLZD® 牛利

Ball Lock Stainless Steel Cable Ties 圆珠自锁式不锈钢扎带

Material: Stainless steel 201/304/316, All length are available upon request;
Working temperature : -60°C to 550°C (-112°F to 1022°F);
Feature: Self-locking, Low profile, Smooth rounded edges ensure safe;
Useful in extreme temperature environment;
Flame retardant and non-toxic.

材质: 采用不锈钢201, 304, 316材质, 各种长度皆可制作, 特殊规格可以定制;
工作温度范围: -60°C~550°C (-112°F ~ 1022°F);
产品特性: 抗张强度高, 使用简单快捷, 耐酸耐腐蚀, 可用于极端温度环境。

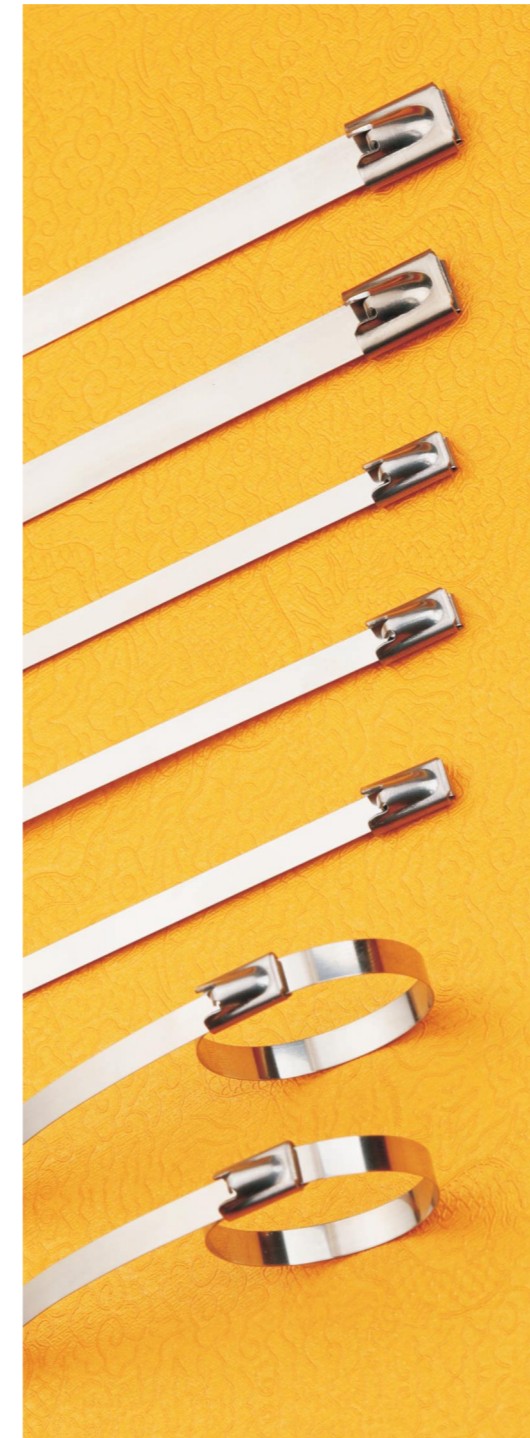


型号 Item NO.	长L Length		宽W Width mm	厚T Thickness mm	捆扎范围E Bundle Dia. mm	拉力 Min. Loop Tensile Strength	
	inch	mm				LBS	kgs
NLSS-4.6x130	5-1/8"	130	4.6	0.25	31	135	60
NLSS-4.6x150	6"	150	4.6	0.25	37	135	60
NLSS-4.6x200	8"	200	4.6	0.25	50	135	60
NLSS-4.6x250	10"	250	4.6	0.25	63	135	60
NLSS-4.6x300	11-5/8"	300	4.6	0.25	76	135	60
NLSS-4.6x350	13-3/4"	350	4.6	0.25	89	135	60
NLSS-4.6x400	15-3/4"	400	4.6	0.25	102	135	60
NLSS-4.6x450	17-3/4"	450	4.6	0.25	115	135	60
NLSS-4.6x500	19-11/16"	500	4.6	0.25	128	135	60
NLSS-7.9x150	6"	150	7.9	0.25	37	230	100
NLSS-7.9x200	8"	200	7.9	0.25	50	230	100
NLSS-7.9x250	10"	250	7.9	0.25	63	230	100
NLSS-7.9x300	11-5/8"	300	7.9	0.25	76	230	100
NLSS-7.9x350	13-3/4"	350	7.9	0.25	89	230	100
NLSS-7.9x400	15-3/4"	400	7.9	0.25	102	230	100
NLSS-7.9x450	17-3/4"	450	7.9	0.25	115	230	100
NLSS-7.9x500	19-11/16"	500	7.9	0.25	128	230	100
NLSS-7.9x550	21-1/16"	550	7.9	0.25	141	230	100
NLSS-7.9x600	23-5/8"	600	7.9	0.25	154	230	100
NLSS-7.9x650	25-9/16"	650	7.9	0.25	167	230	100
NLSS-10.0x150	6"	150	10.0	0.25	37	270	120
NLSS-10.0x200	8"	200	10.0	0.25	50	270	120
NLSS-10.0x250	10"	250	10.0	0.25	63	270	120
NLSS-10.0x300	11-5/8"	300	10.0	0.25	76	270	120
NLSS-10.0x350	13-3/4"	350	10.0	0.25	89	270	120
NLSS-10.0x400	15-3/4"	400	10.0	0.25	102	270	120
NLSS-10.0x450	17-3/4"	450	10.0	0.25	115	270	120
NLSS-10.0x500	19-11/16"	500	10.0	0.25	128	270	120
NLSS-10.0x550	21-1/16"	550	10.0	0.25	141	270	120
NLSS-10.0x600	23-5/8"	600	10.0	0.25	154	270	120
NLSS-10.0x650	25-9/16"	650	10.0	0.25	167	270	120
NLSS-10.0x700	27-1/2"	700	10.0	0.25	180	270	120
NLSS-12x200	8"	200	12.0	0.25	50	337	150
NLSS-12x250	10"	250	12.0	0.25	63	337	150
NLSS-12x300	11-5/8"	300	12.0	0.25	76	337	150
NLSS-12x350	13-3/4"	350	12.0	0.25	89	337	150
NLSS-12x400	15-3/4"	400	12.0	0.25	102	337	150
NLSS-12x450	17-3/4"	450	12.0	0.25	115	337	150
NLSS-12x500	19-11/16"	500	12.0	0.25	128	337	150
NLSS-12x550	21-1/16"	550	12.0	0.25	141	337	150
NLSS-12x600	23-5/8"	600	12.0	0.25	154	337	150
NLSS-12x650	25-9/16"	650	12.0	0.25	167	337	150
NLSS-12x700	27-1/2"	700	12.0	0.25	180	337	150
NLSS-12x800	31-1/2"	800	12.0	0.25	193	337	150
NLSS-12x1000	39-3/8"	1000	12.0	0.25	206	337	150

PVC Coated Stainless Steel Cable Ties
PVC涂层不锈钢扎带

Material: Stainless steel 201/304/316, All length are available upon request;
Working temperature: -60°C to 550°C (-112°F to 1022°F);
Feature: Self-locking, Low profile, Smooth rounded edges ensure safe;
Useful in extreme temperature environment;
Flame retardant and non-toxic.

材质: 采用不锈钢201, 304, 316材质, 各种长度皆可制作, 特殊规格可以定制;
工作温度范围: -60°C~550°C (-112°F ~ 1022°F);
产品特性: 抗张强度高, 使用简单快捷, 耐酸耐腐蚀, 可用于极端温度环境。

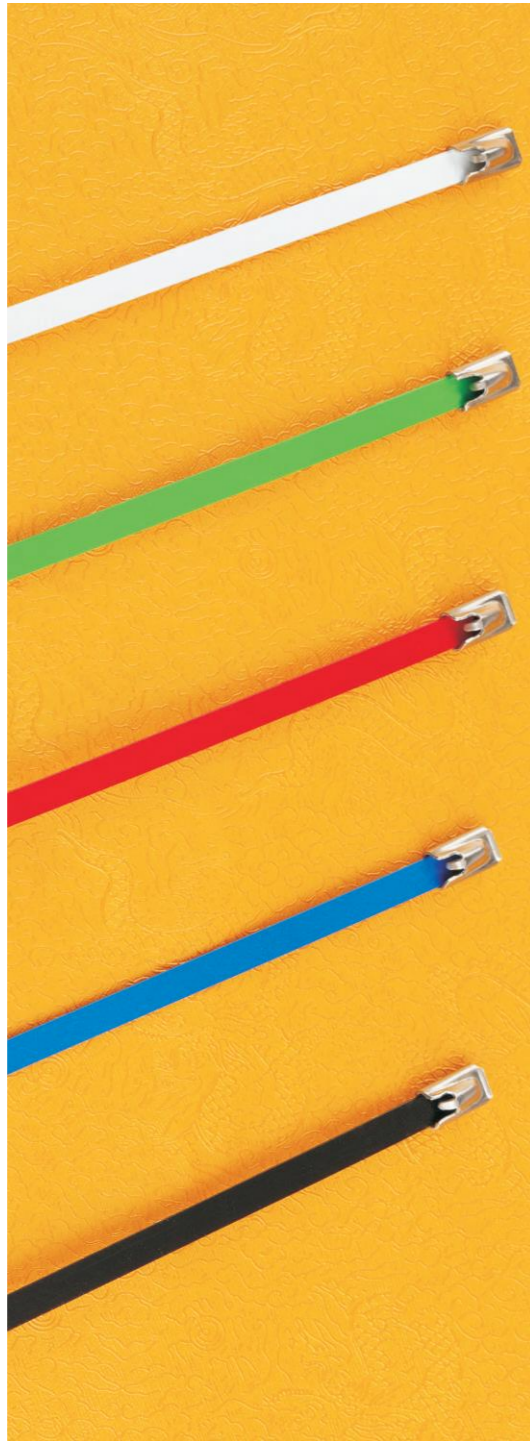

型号 Item NO.	长L Length		宽W Width	厚T Thickness	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
	inch	mm				LBS	kgs
NLSC-4.6x130	5-1/8"	130	4.6	0.25	31	135	60
NLSC-4.6x150	6"	150	4.6	0.25	37	135	60
NLSC-4.6x200	8"	200	4.6	0.25	50	135	60
NLSC-4.6x250	10"	250	4.6	0.25	63	135	60
NLSC-4.6x300	11-5/8"	300	4.6	0.25	76	135	60
NLSC-4.6x350	13-3/4"	350	4.6	0.25	89	135	60
NLSC-4.6x400	15-3/4"	400	4.6	0.25	102	135	60
NLSC-4.6x450	17-3/4"	450	4.6	0.25	115	135	60
NLSC-4.6x500	19-11/16"	500	4.6	0.25	128	135	60
NLSC-7.9x150	6"	150	7.9	0.25	37	230	100
NLSC-7.9x200	8"	200	7.9	0.25	50	230	100
NLSC-7.9x250	10"	250	7.9	0.25	63	230	100
NLSC-7.9x300	11-5/8"	300	7.9	0.25	76	230	100
NLSC-7.9x350	13-3/4"	350	7.9	0.25	89	230	100
NLSC-7.9x400	15-3/4"	400	7.9	0.25	102	230	100
NLSC-7.9x450	17-3/4"	450	7.9	0.25	115	230	100
NLSC-7.9x500	19-11/16"	500	7.9	0.25	128	230	100
NLSC-7.9x550	21-1/16"	550	7.9	0.25	141	230	100
NLSC-7.9x600	23-5/8"	600	7.9	0.25	154	230	100
NLSC-7.9x650	25-9/16"	650	7.9	0.25	167	230	100
NLSC-10.0x150	6"	150	10.0	0.25	37	270	120
NLSC-10.0x200	8"	200	10.0	0.25	50	270	120
NLSC-10.0x250	10"	250	10.0	0.25	63	270	120
NLSC-10.0x300	11-5/8"	300	10.0	0.25	76	270	120
NLSC-10.0x350	13-3/4"	350	10.0	0.25	89	270	120
NLSC-10.0x400	15-3/4"	400	10.0	0.25	102	270	120
NLSC-10.0x450	17-3/4"	450	10.0	0.25	115	270	120
NLSC-10.0x500	19-11/16"	500	10.0	0.25	128	270	120
NLSC-10.0x550	21-1/16"	550	10.0	0.25	141	270	120
NLSC-10.0x600	23-5/8"	600	10.0	0.25	154	270	120
NLSC-10.0x650	25-9/16"	650	10.0	0.25	167	270	120
NLSC-10.0x700	27-1/2"	700	10.0	0.25	180	270	120
NLSC-12x200	8"	200	12.0	0.25	50	337	150
NLSC-12x250	10"	250	12.0	0.25	63	337	150
NLSC-12x300	11-5/8"	300	12.0	0.25	76	337	150
NLSC-12x350	13-3/4"	350	12.0	0.25	89	337	150
NLSC-12x400	15-3/4"	400	12.0	0.25	102	337	150
NLSC-12x450	17-3/4"	450	12.0	0.25	115	337	150
NLSC-12x500	19-11/16"	500	12.0	0.25	128	337	150
NLSC-12x550	21-1/16"	550	12.0	0.25	141	337	150
NLSC-12x600	23-5/8"	600	12.0	0.25	154	337	150
NLSC-12x650	25-9/16"	650	12.0	0.25	167	337	150
NLSC-12x700	27-1/2"	700	12.0	0.25	180	337	150
NLSC-12x800	31-1/2"	800	12.0	0.25	193	337	150
NLSC-12x1000	39-3/8"	1000	12.0	0.25	206	337	150

Ladder Stainless Steel Cable Ties
阶梯自锁式不锈钢扎带

Material: Stainless steel 201/304/316, All length are available upon request;
Working temperature: -60°C to 550°C (-112°F to 1022°F);
Feature: Self-locking, Low profile, Smooth rounded edges ensure safe;
Useful in extreme temperature environment;
Flame retardant and non-toxic.

材质: 采用不锈钢201, 304, 316材质, 各种长度皆可制作, 特殊规格可以定制;
工作温度范围: -60°C~550°C (-112°F ~ 1022°F);
产品特性: 新型不锈钢扎带采用钩孔式设计, 具有自锁式功能, 锁紧后不会滑动, 不会受外力震动等外力影响而松动。




型号 Item NO.	长L Length		宽W Width	厚T Thickness	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
	inch	mm				LBS	kgs
NLSD-4.6x150	6"	150	4.6	0.25	37	110	50
NLSD-4.6x200	8"	200	4.6	0.25	50	110	50
NLSD-4.6x250	10"	250	4.6	0.25	63	110	50
NLSD-4.6x300	11-5/8"	300	4.6	0.25	76	110	50
NLSD-4.6x350	13-3/4"	350	4.6	0.25	89	110	50
NLSD-4.6x400	15-3/4"	400	4.6	0.25	102	110	50
NLSD-4.6x450	17-3/4"	450	4.6	0.25	115	110	50
NLSD-4.6x500	19-11/16"	500	4.6	0.25	128	110	50
NLSD-7.9x150	6"	150	7.0	0.25	37	155	70
NLSD-7.9x200	8"	200	7.0	0.25	50	155	70
NLSD-7.9x250	10"	250	7.0	0.25	63	155	70
NLSD-7.9x300	11-5/8"	300	7.0	0.25	76	155	70
NLSD-7.9x350	13-3/4"	350	7.0	0.25	89	155	70
NLSD-7.9x400	15-3/4"	400	7.0	0.25	102	155	70
NLSD-7.9x450	17-3/4"	450	7.0	0.25	115	155	70
NLSD-7.9x500	19-11/16"	500	7.0	0.25	128	155	70
NLSD-7.9x550	21-1/16"	550	7.0	0.25	141	155	70
NLSD-7.9x600	23-5/8"	600	7.0	0.25	154	155	70
NLSD-7.9x650	25-9/16"	650	7.0	0.25	167	155	70
NLSD-10.0x150	6"	150	10.0	0.25	37	220	100
NLSD-10.0x200	8"	200	10.0	0.25	50	220	100
NLSD-10.0x250	10"	250	10.0	0.25	63	220	100
NLSD-10.0x300	11-5/8"	300	10.0	0.25	76	220	100
NLSD-10.0x350	13-3/4"	350	10.0	0.25	89	220	100
NLSD-10.0x400	15-3/4"	400	10.0	0.25	102	220	100
NLSD-10.0x450	17-3/4"	450	10.0	0.25	115	220	100
NLSD-10.0x500	19-11/16"	500	10.0	0.25	128	220	100
NLSD-10.0x550	21-1/16"	550	10.0	0.25	141	220	100
NLSD-10.0x600	23-5/8"	600	10.0	0.25	154	220	100
NLSD-10.0x650	25-9/16"	650	10.0	0.25	167	220	100
NLSD-10.0x700	27-1/2"	700	10.0	0.25	180	220	100

L Type Stainless Steel Cable Ties
L 型不锈钢扎带

Material: Stainless steel 201/304/316, All length are available upon request;
Working temperature: -60°C to 550°C (-112°F to 1022°F);
Feature: Self-locking, Low profile, Smooth rounded edges ensure safe;
Useful in extreme temperature environment;
Flame retardant and non-toxic.

材质: 采用不锈钢201, 304, 316材质, 各种长度皆可制作, 特殊规格可以定制;
工作温度范围: -60°C~550°C (-112°F ~ 1022°F);
产品特性: 抗张强度高, 使用简单快捷, 耐酸耐腐蚀, 可用于极端温度环境。

型号 Item NO.	长L Length		宽W Width	厚T Thickness	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
	inch	mm				LBS	kgs
NLS-12x200L	8"	200	12.0	0.3	50	270	120
NLS-12x250L	10"	250	12.0	0.3	63	270	120
NLS-12x300L	11-5/8"	300	12.0	0.3	76	270	120
NLS-12x350L	13-3/4"	350	12.0	0.3	89	270	120
NLS-12x400L	15-3/4"	400	12.0	0.3	102	270	120
NLS-12x450L	17-3/4"	450	12.0	0.3	115	270	120
NLS-12x500L	19-11/16"	500	12.0	0.3	128	270	120
NLS-12x550L	21-1/16"	550	12.0	0.3	141	270	120
NLS-16x250L	10"	250	15.0	0.3	63	337	150
NLS-16x300L	11-5/8"	300	15.0	0.3	76	337	150
NLS-16x350L	13-3/4"	350	15.0	0.3	89	337	150
NLS-16x400L	15-3/4"	400	15.0	0.3	102	337	150
NLS-16x450L	17-3/4"	450	15.0	0.3	115	337	150
NLS-16x500L	19-11/16"	500	15.0	0.3	128	337	150
NLS-16x550L	21-1/16"	550	15.0	0.3	141	337	150
NLS-16x600L	23-5/8"	600	15.0	0.3	154	337	150
NLS-16x700L	27-1/2"	700	15.0	0.3	180	337	150
NLS-16x750L	30"	750	15.0	0.3	191	337	150
NLS-16x800L	31-1/2"	800	15.0	0.3	193	337	150
NLS-16x1000L	39-3/8"	1000	15.0	0.3	206	337	150
NLS-19x300L	11-5/8"	300	19.0	0.4	76	270	120
NLS-19x400L	15-3/4"	400	19.0	0.4	102	270	120
NLS-19x500L	19-11/16"	500	19.0	0.4	128	270	120
NLS-19x600L	23-5/8"	600	19.0	0.4	154	270	120
NLS-19x700L	27-1/2"	700	19.0	0.4	180	270	120
NLS-19x800L	31-1/2"	800	19.0	0.4	193	270	120
NLS-19x900L	35-2/5"	900	19.0	0.4	200	270	120
NLS-19x1000L	39-2/5"	1000	19.0	0.4	206	270	120

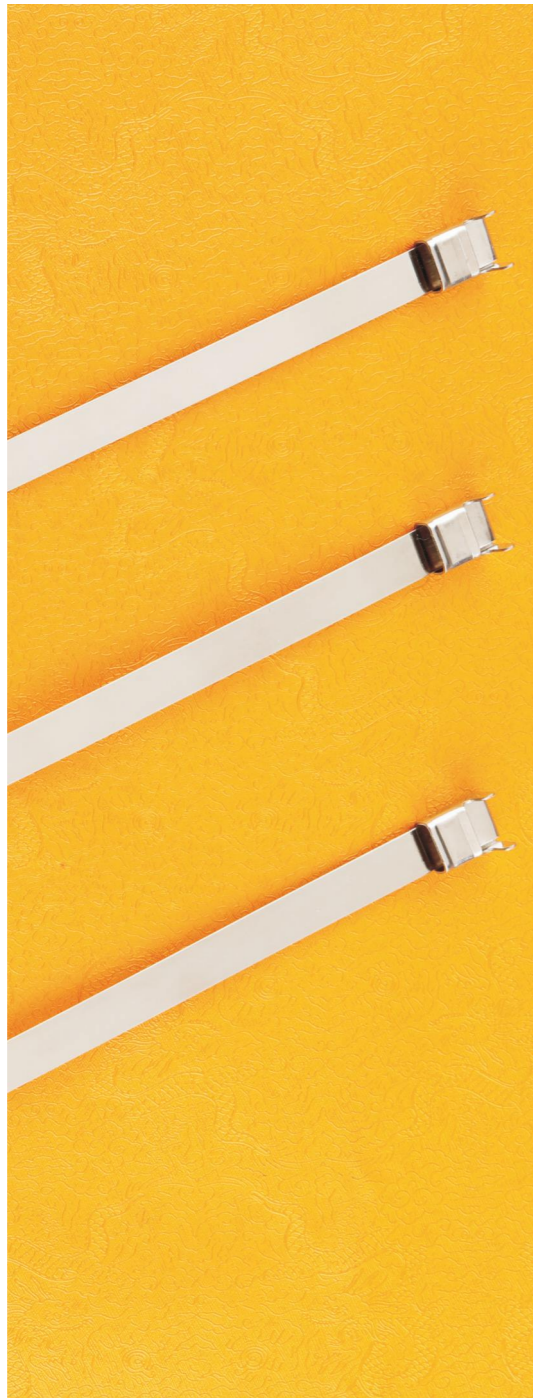


Stainless Steel Parts
不锈钢配件

Stainless steel marker plate
Material: stainless steel 304(316);
Feature: the marker plates are very bright without burr, usually are used to identify cables.

不锈钢电缆标牌
材质: 304不锈钢(316可选);
特点: 产品无毛刺, 表面光亮, 适用于识别电缆;
使用方法: 可随两根4.6mm的扎带固定。

型号 Item NO.	宽度 Width	厚度 Thickness	长度 Length	数量/袋 Qty/bag
	mm	mm	mm	pcs
NL-MP15x110	15	0.4	110	100
NL-MP9.5x89	9.5	0.4	89	100
NL-MP9.5x50	9.5	0.4	50	100
NL-MP19x50	19	0.4	50	100
NL-MP19x89	19	0.4	89	100
NL-MP19x110	19	0.4	110	100

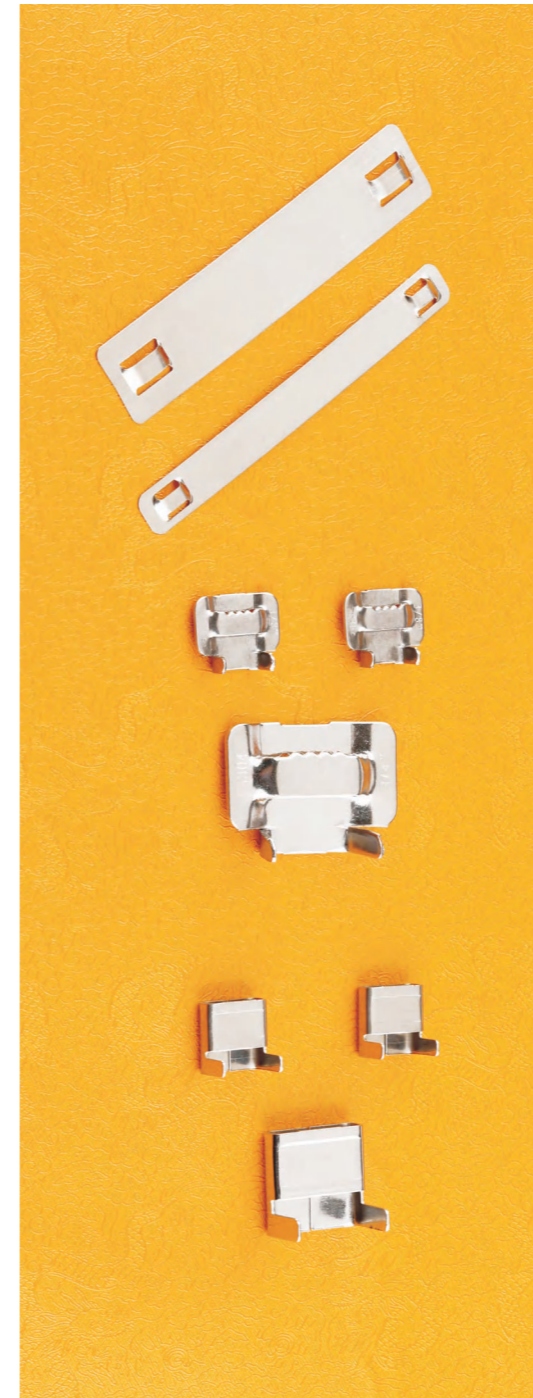

Stainless steel packing buckle
Material: stainless steel 201,304,316;
Feature: With the buckle, the stainless steel ties can be widely used to bundle and fix traffic signs, advertising boards, cable brackets etc.

不锈钢打包扣
材质: 201,304,316不锈钢;
用途: 与同等宽度的不锈钢打包带一起使用, 常用于交通标志牌, 广告牌, 电力标志牌, 线缆托架等捆扎固定。

Teeth type packing buckle
牙型不锈钢打包扣

型号 Item NO.	宽度 Width		厚度 Thickness	数量/袋 Qty/bag
	mm	inch		
NL-DB6.4	6.4	0.4	0.5	100
NL-DB10	10	0.4	0.5-1	100
NL-DB12.7	12.7	0.4	1.2-1.5	100
NL-DB16	16	0.4	1.2-1.5	100
NL-DB19	19	0.4	1.2-1.8	100

L type packing buckle
L型不锈钢打包扣

型号 Item NO.	宽度 Width		厚度 Thickness	数量/袋 Qty/bag
	mm	inch		
NL-LB8	8	0.4	0.7	100
NL-LB10	10	0.4	0.7	100
NL-LB12.7	12.7	0.4	0.7	100
NL-LB16	16	0.4	0.8	100
NL-LB19	19	0.4	0.8	100