




常规尼龙扎带 Standard Cable Ties

- 1、Features: Eco-friendly, Strong tensile strength, Anti-Acid, Anti-erosion, not easy to aging. Cable ties with special materials can be customized, which have better performance such as high and low temperature resistance, UV resistance, flammability, etc.
- 2、Material: UL Approved Nylon 66.
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：产品环保，抗拉强度高、耐酸、耐腐蚀、不易老化。可定制特殊材料生产的扎带，耐高低温、抗紫外线、阻燃等性能更优异。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。

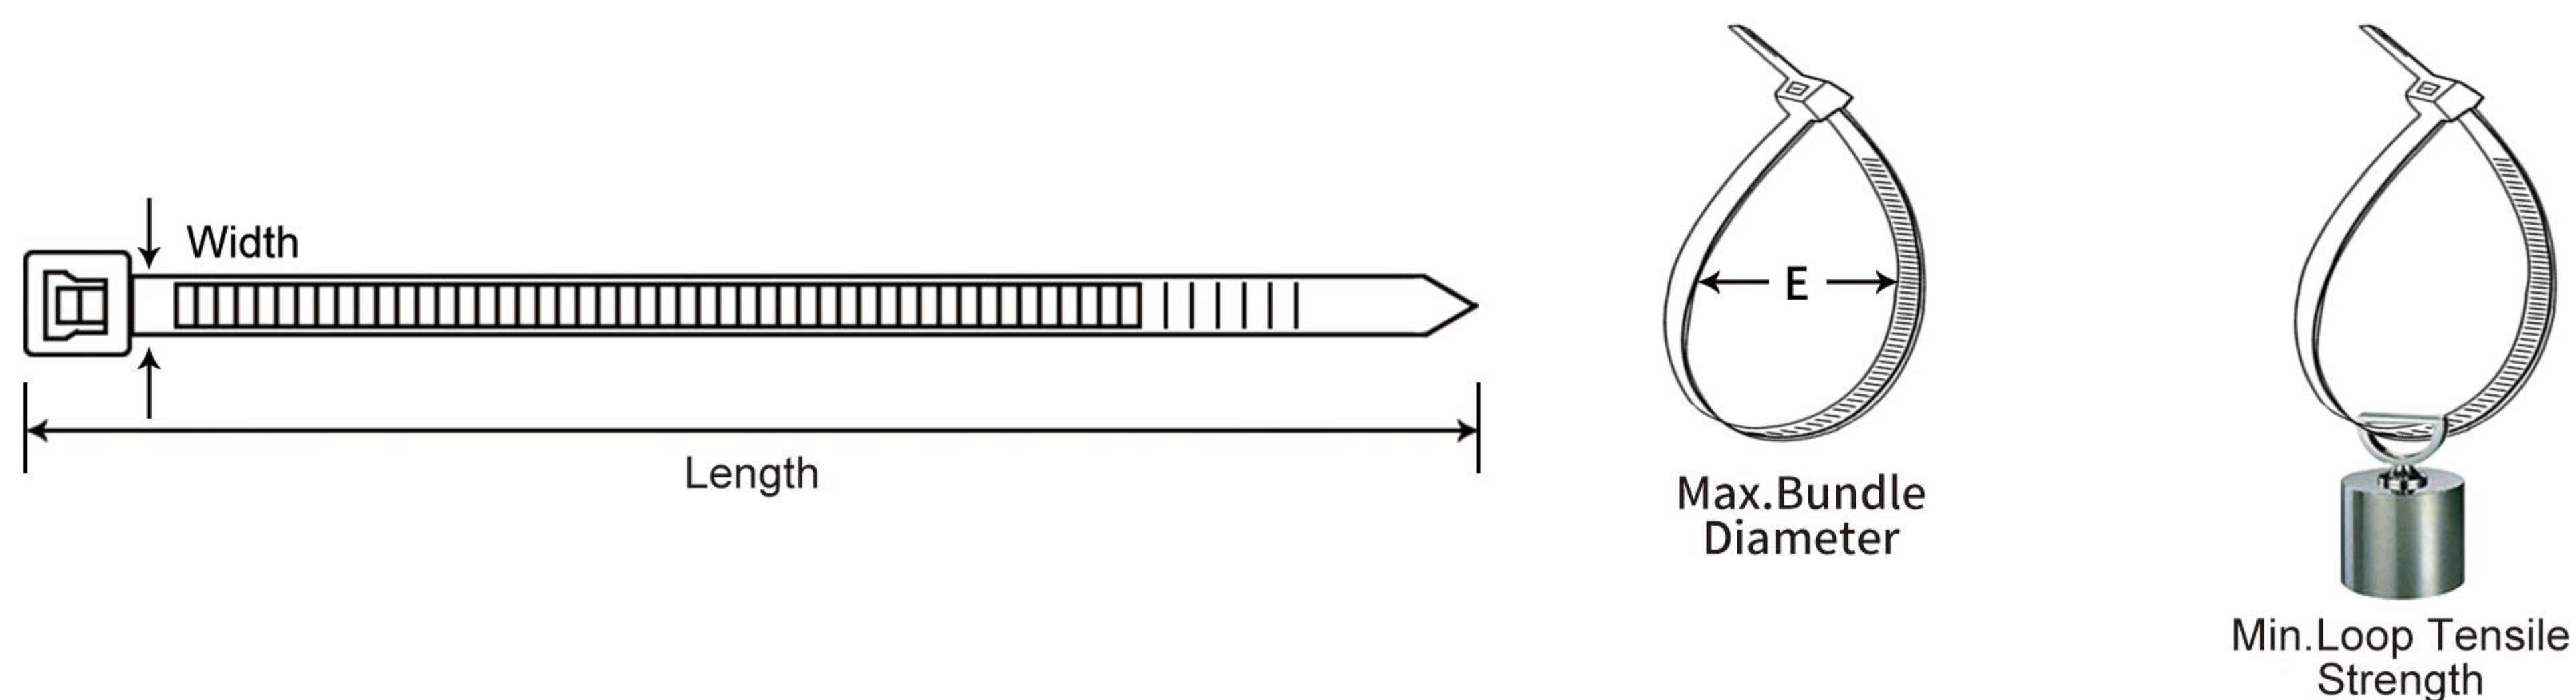

Various colors



Halogen Free




Corrosion resistant




Flame retardant
94V-2



High tensile strength

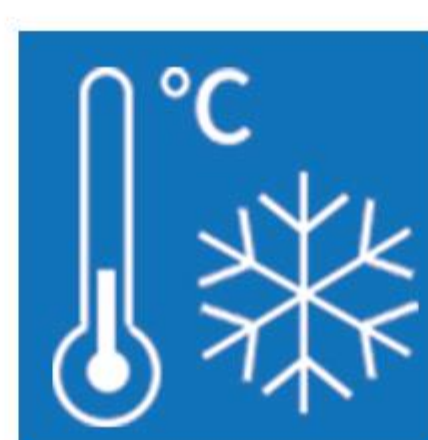

Low temperature
resistant

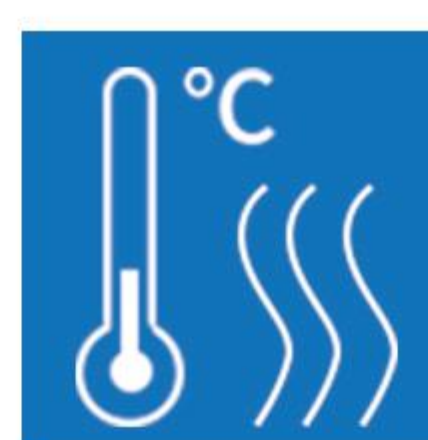

High temperature
resistant



UV resistant



Non-magnetic



Item No.	Width(W)		Min. Loop Tensile Strength		Length(L)		Max. Bundle Dia. (E)	
	mm	inch	LBS	KGS	mm	inch	mm	inch
NL-3x80	2.5	0.1	18	8	80	3.1	16	0.63
NL-3x100					100	4	22	0.87
NL-3x120					120	4.7	30	1.18
NL-3x150					150	6	35	1.38
NL-3x200					200	8	53	2.09
NL-4x100	3.6	0.14	40	18	100	4	22	0.87
NL-4x120					120	4.7	30	1.18
NL-4x150					150	6	35	1.38
NL-4x200					200	8	53	2.09
NL-4x250					250	9.8	65	2.56
NL-4x300					300	11.8	80	3.15
NL-4x350					350	13.8	93	3.66
NL-4x370					370	14.6	102	4.02
NL-4x400					400	15.7	108	4.25
NL-4x450					450	17.7	124	4.88
NL-4x500					500	19.7	138	5.43
NL-5x150	4.6	0.18	50	22	150	6	35	1.38
NL-5x200	4.8	0.19	55	25	200	8	53	2.09
NL-5x250					250	9.8	65	2.56
NL-5x300					300	11.8	80	3.15
NL-5x350					350	13.8	93	3.66
NL-5x380					380	15	102	4.02
NL-5x400					400	15.7	108	4.25
NL-5x450					450	17.7	124	4.88
NL-5x500					500	19.7	138	5.43
NL-5x550					550	21.7	154	6.06
NL-5x650					650	25.6	188	7.4
NL-8x150	7.6	0.3	120	55	150	6	36	1.42
NL-8x200					200	8	53	2.09
NL-8x250					250	9.8	65	2.56
NL-8x300					300	11.8	80	3.15
NL-8x350					350	13.8	93	3.66
NL-8x380					380	15	102	4.02
NL-8x400					400	15.7	108	4.25
NL-8x450					450	17.7	124	4.88
NL-8x500					500	19.7	138	5.43
NL-8x550					550	21.7	154	6.06
NL-8x600					600	23.6	172	6.77
NL-8x650					650	25.6	188	7.4
NL-8x700					700	27.6	205	8.07
NL-8x750					750	29.5	222	8.74
NL-8x800					800	31.5	234	9.21
NL-10x400	9	0.35	175	80	400	15.7	108	4.25
NL-10x450					450	17.7	124	4.88
NL-10x500					500	19.7	138	5.43
NL-10x550					550	21.7	154	6.06
NL-10x600					600	23.6	172	6.77
NL-10x650					650	25.6	188	7.4
NL-10x700					720	28.3	205	8.07
NL-10x750					760	30	222	8.74
NL-10x800					800	31.5	234	9.21
NL-10x920					920	36.2	275	10.83
NL-10x1000					1000	39.4	292	11.5
NL-10x1200					1200	47.2	340	13.39
NL-10x1350					1350	53.1	380	14.96
NL-10x1500					1500	59.1	430	16.93
NL-12x300	12	0.47	250	114	300	11.8	80	3.15
NL-12x400					400	15.7	108	4.25
NL-12x500					500	19.7	138	5.43
NL-12x600					600	23.6	172	6.77
NL-12x650					650	25.6	188	7.4
NL-12x800					800	31.5	234	9.21
NL-12x900					900	35.4	268	10.55
NL-12x1000					1000	39.4	292	11.5


Item No.	Width(W)		Min. Loop Tensile Strength		Length(L)		Max. Bundle Dia. (E)	
	mm	inch	LBS	KGS	mm	inch	mm	inch
NL-3x80S	1.9	0.07	11	5	80	3.1	16	0.63
NL-3x100S					100	4	22	0.87
NL-3x120S					120	4.7	30	1.18
NL-3x150S					150	6	35	1.38
NL-3x200S					200	8	53	2.09
NL-4x150S	2.7	0.11	22	10	150	6	35	1.38
NL-4x200S					200	8	53	2.09
NL-4x250S					250	9.8	65	2.56
NL-4x300S					300	11.8	80	3.15
NL-4x150M	3.0	0.1	30	14	150	6	35	1.38
NL-4x200M					200	8	53	2.09
NL-4x250M					250	9.8	65	2.56
NL-4x300M					300	11.8	80	3.15
NL-5x380M	4.3	0.17	44	20	380	15	102	4.02
NL-8x200S	5.2	0.2	75	35	200	8	53	2.09
NL-8x250S					250	9.8	65	2.56
NL-8x300S					300	11.8	80	3.15
NL-8x350S					350	13.8	93	3.66
NL-8x400S					400	15.7	108	4.25
NL-8x450S					450	17.7	124	4.88
NL-8x500S					500	19.7	138	5.43
NL-8x200M	5.8	0.23	88	40	200	8	53	2.09
NL-8x250M					250	9.8	65	2.56
NL-8x300M					300	11.8	80	3.15
NL-8x350M					350	13.8	93	3.66
NL-8x400M					400	15.7	108	4.25
NL-8x450M					450	17.7	124	4.88
NL-8x500M					500	19.7	138	5.43
NL-10x650S	7.2	0.28	110	50	650	25.6	188	7.4



平扣扎带 In-line Cable Ties

- 1、 Features: Also children playground cable ties, in-line 180° entry, the gripping teeth faces outside instead of inside, there is no sharp edges when cut the ties, makes the ties perfect for children's playground.
- 2、 Material: UL Approved Nylon 66 .
- 3、 Flammability: UL 94V-2.
- 4、 Installation temperature: -20°C to 85°C
- 5、 Working temperature: -40°C to 85°C
- 6、 Color: Natural (white), Black, other colors are available as requested.
- 7、 Certificates: UL, CE, RoHS, REACH, SGS.

- 1、 特点： 又称儿童游乐场扎带，180°平直插入使用，卡齿朝外而非朝内，剪断扎带时没有锋利的边缘，非常适合儿童游乐场使用。
- 2、 材料： UL 认可的尼龙 66。
- 3、 阻燃性： UL 94V-2。
- 4、 安装温度： -20°C 至 85°C。
- 5、 工作温度： -40°C 至 85°C。
- 6、 颜色： 自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、 证书： UL、 CE、 RoHS、 REACH、 SGS。

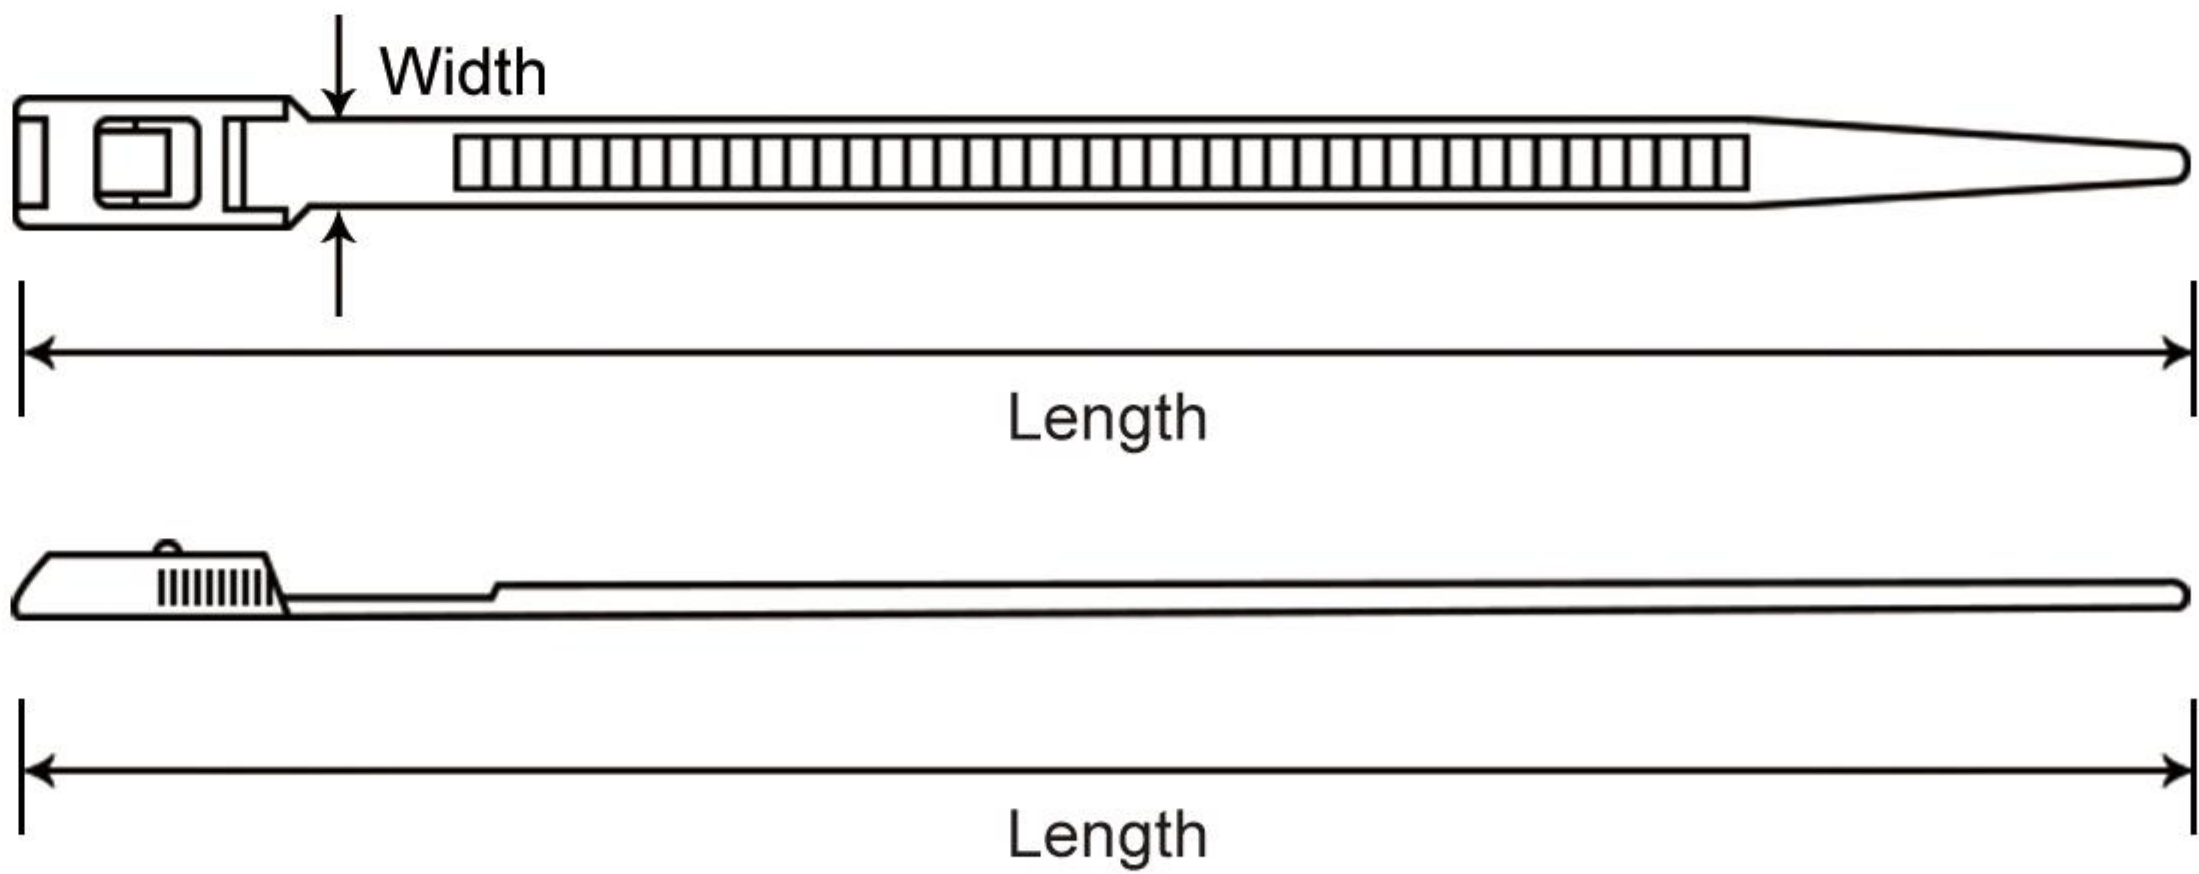


Item No.	Width(W)		Length(L)		Max.Bundle Dia. (E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-8x350IT	8	0.32	350	4.5	95	1.42	50	110
NL-8x400IT	8	0.32	400	7.1	110	2.09	50	110
NL-8x450IT	8	0.35	450	7.1	125	2.56	55	120
NL-9x450IT	9	0.35	450	10.2	125	3.15	55	120
NL-9x500IT	9	0.35	500	11.8	140	3.66	55	120



可松式扎带 Releasable Cable Ties

- 1、Features: Can be released for repeated use, not easy to aging.
- 2、Material: UL Approved Nylon 66.
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：可以解开并重复使用，不易老化。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。

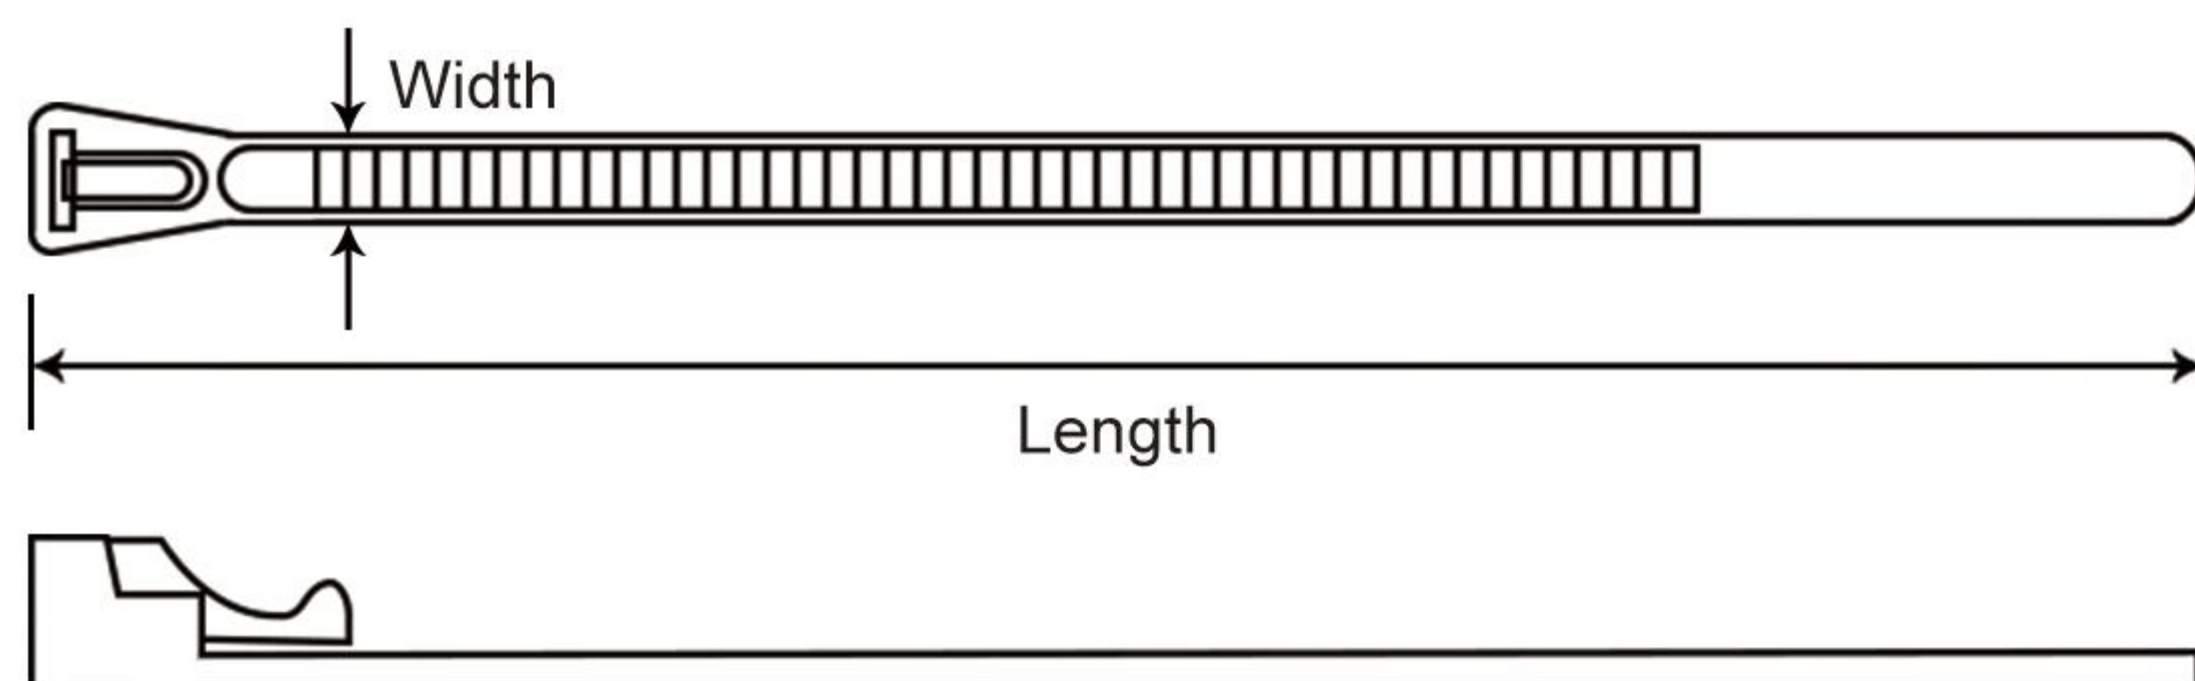


Item No.	Width(W)		Length(L)		Bundle Diameter	Min.loop tensile strength	
	mm	inch	mm	inch		LBS	KGS
NL-4x150RT	3.6	0.142	150	6	3-35	18	8
NL-5x200RT	4.8	0.189	200	8	3-53	40	18
NL-5x300RT	4.8	0.189	300	11.8	3-80	40	18
NL-8x150RT	7.2	0.283	150	6	4-35	66	30
NL-8x200RT	7.2	0.283	200	8	4-53	66	30
NL-8x250RT	7.2	0.283	250	9.8	4-65	66	30
NL-8x300RT	7.2	0.283	300	11.8	4-80	66	30
NL-8x350RT	7.2	0.283	350	13.8	4-95	66	30
NL-8x400RT	7.2	0.283	400	15.7	4-108	66	30
NL-8x450RT	7.2	0.283	450	17.7	4-124	66	30
NL-8x500RT	7.2	0.283	500	19.7	4-138	66	30
NL-8x710RT	7.2	0.283	710	28	4-208	66	30
NL-10x1000RT	8.8	0.346	1000	39.4	5-292	130	60



固定头扎带 Mountable Head Cable Ties

- 1、Features: The mounting hole outside the head of the cable tie allows for fixing to another surface by screw or rivet. The ties are tensile strong, Anti-Acid, Anti-erosion, not easy to aging.
- 2、Material: UL Approved Nylon 66.
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：扎带头部外侧的安装孔可以用螺丝或铆钉固定到另一个物件上。扎带抗拉强度高、耐酸、耐腐蚀、不易老化。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。

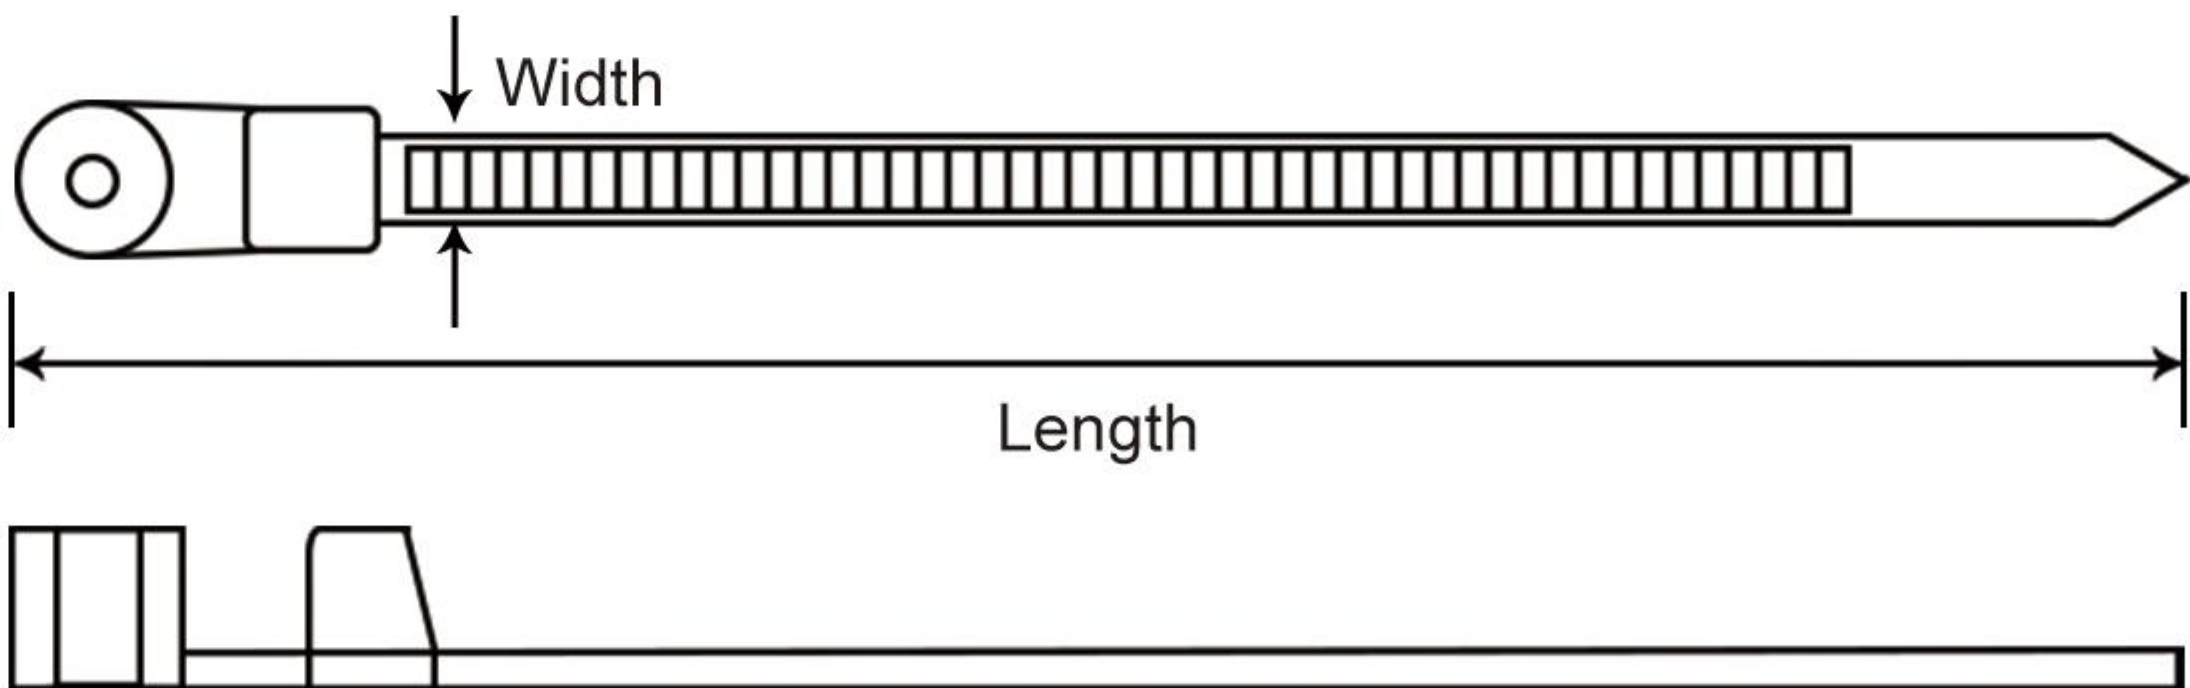


Item No.	Width(W)		Length(L)		Hole Diameter(D)		Max.Bundle Dia.(E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-4x100HT	3.6	0.14	100	4	4.5	0.18	22	0.87	40	18
NL-4x150HT	3.6	0.14	150	6	4.5	0.18	35	1.38	40	18
NL-5x160HT	4.8	0.18	160	6.3	5.5	0.22	35	1.38	55	25
NL-5x200HT	4.8	0.19	220	8.7	5.5	0.22	53	2.09	55	25
NL-5x300HT	4.8	0.19	300	11.8	5.5	0.22	80	3.15	55	25
NL-5x350HT	4.8	0.19	350	13.8	5.5	0.22	93	3.66	55	25
NL-5x400HT	4.8	0.19	400	15.7	5.5	0.22	108	4.25	55	25
NL-8x300HT	7.6	0.3	300	11.8	6.8	0.27	80	3.15	120	55
NL-8x350HT	7.6	0.3	350	13.8	6.8	0.27	93	3.66	120	55
NL-8x380HT	7.6	0.3	380	15	6.8	0.27	102	4.02	120	55




插销扎带 Push Mount Cable Ties

- 1、Features: The push-mount part outside the head of the cable tie can be pushed into a hole, tight and fix. The cable ties are tensile strong, Anti-Acid, Anti-erosion, not easy to aging..
- 2、Material: UL Approved Nylon 66.
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：扎带头部外侧的插入式安装部分可插入孔内，紧固固定。扎带抗拉力强，耐酸、耐腐蚀，不易老化。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。

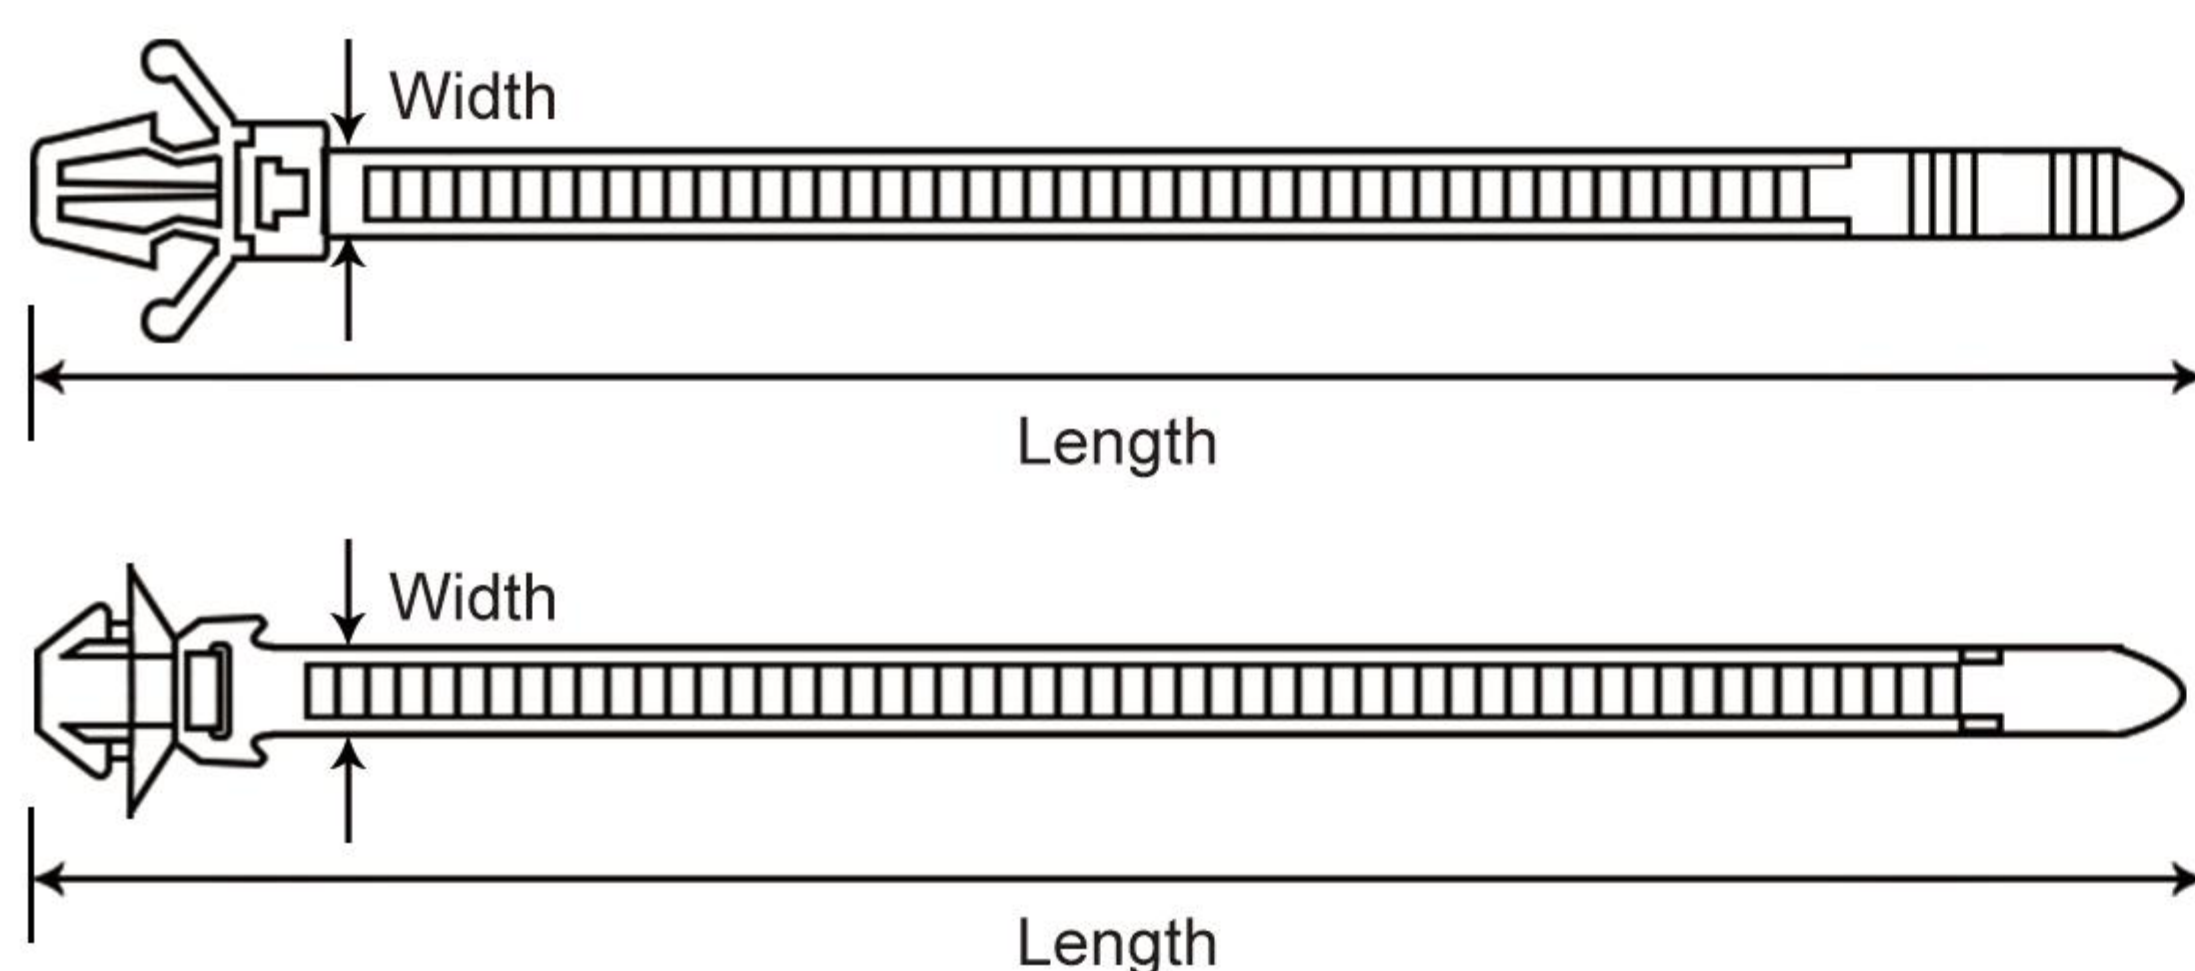

Item No.	Width(W)		Length(L)		Hole Diameter(D)		Max.Bundle Dia. (E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-3x100PT	2.5	0.1	100	4	4.8	0.19	22	0.87	18	8
NL-4x120PT	3.6	0.14	120	4.7	4	0.16	25	0.98	40	18
NL-4x150PT	3.6	0.14	150	6	5.4	0.21	35	1.38	40	18
NL-5x120PT	4.8	0.19	120	4.7	6.4	0.25	25	0.95	50	22
NL-5x160PT	4.8	0.19	160	6.3	6.4	0.25	38	1.50	50	22
NL-5x190PT	4.8	0.19	190	7.5	6.4	0.25	46	1.81	50	22

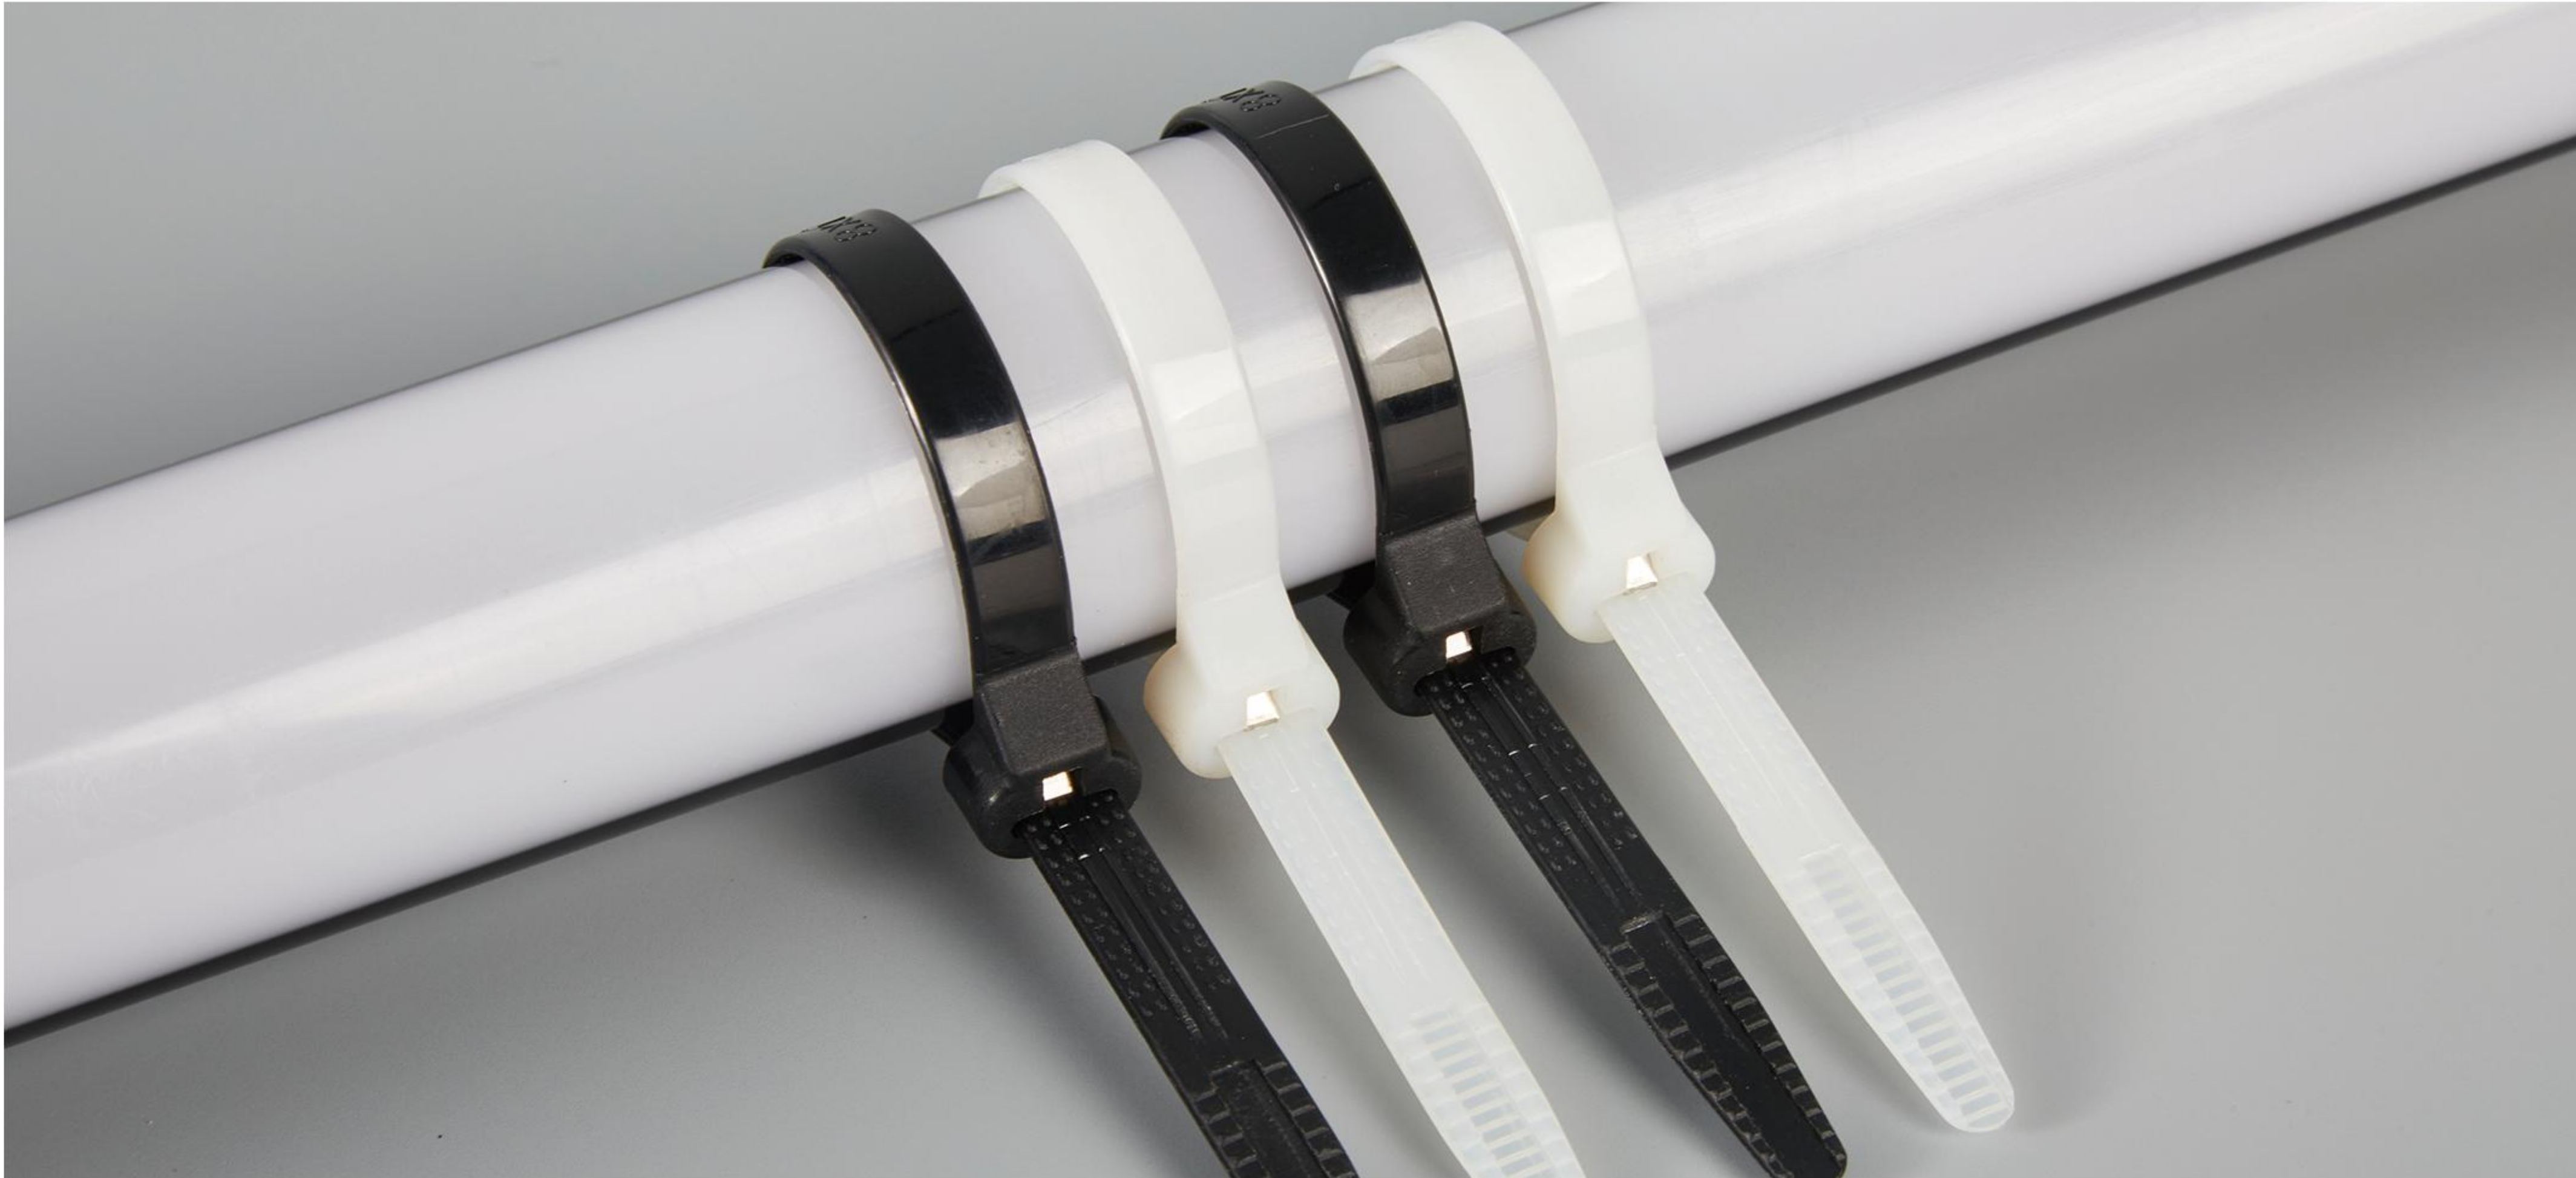


金属嵌片扎带 Metal Pawl Cable Ties

- 1、Features: Stainless steel pawl in the head makes cable ties anti-corrosion, more stable and durable, not easy to aging. Commonly used in shipping, machinery, chemical and other industries.
- 2、Material: UL Approved Nylon 66 and SUS304.
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：扎带头部的止退卡齿是不锈钢，使其防腐性能更佳，更稳定耐用，不易老化，常用语船舶、机械、化工等行业。
- 2、材料：UL 认可得尼龙 66 和 SUS304。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。


Item No.	Width(W)		Length(L)		Max. Bundle Dia. (E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-3x100ST	3	0.12	100	4	22	0.87	20	9
NL-4x150ST	4	0.16	150	6	35	1.38	40	18
NL-4x200ST	4	0.16	200	8	53	2.09	40	18
NL-5x200ST	4.8	0.19	200	8	53	2.09	50	22
NL-5x250ST	4.8	0.19	250	9.8	65	2.56	50	22
NL-5x300ST	4.8	0.19	300	11.8	80	3.15	50	22
NL-5x380ST	4.8	0.19	380	15	102	4.02	50	22
NL-7x300ST	7	0.28	300	11.8	80	3.15	88	40
NL-8x175ST	7.6	0.3	175	7	45	1.77	100	45
NL-8x200ST	7.6	0.3	200	8	53	2.09	100	45
NL-8x240ST	7.6	0.3	240	9.4	62	2.44	100	45
NL-8x300ST	7.6	0.3	300	11.8	80	3.15	100	45
NL-8x350ST	7.6	0.3	350	13.8	93	3.66	100	45
NL-8x400ST	7.6	0.3	400	15.7	108	4.25	100	45
NL-10x300ST	9.8	0.39	300	11.8	80	3.15	120	55
NL-10x350ST	9.8	0.39	350	13.8	93	3.66	120	55
NL-10x400ST	9.8	0.39	400	15.7	108	4.25	120	55
NL-10x450ST	9.8	0.39	450	17.7	124	4.88	120	55
NL-10x500ST	9.8	0.39	500	19.7	138	5.43	120	55
NL-10x550ST	9.8	0.39	550	21.7	154	6.06	120	55
NL-10x600ST	9.8	0.39	600	23.6	172	6.77	120	55

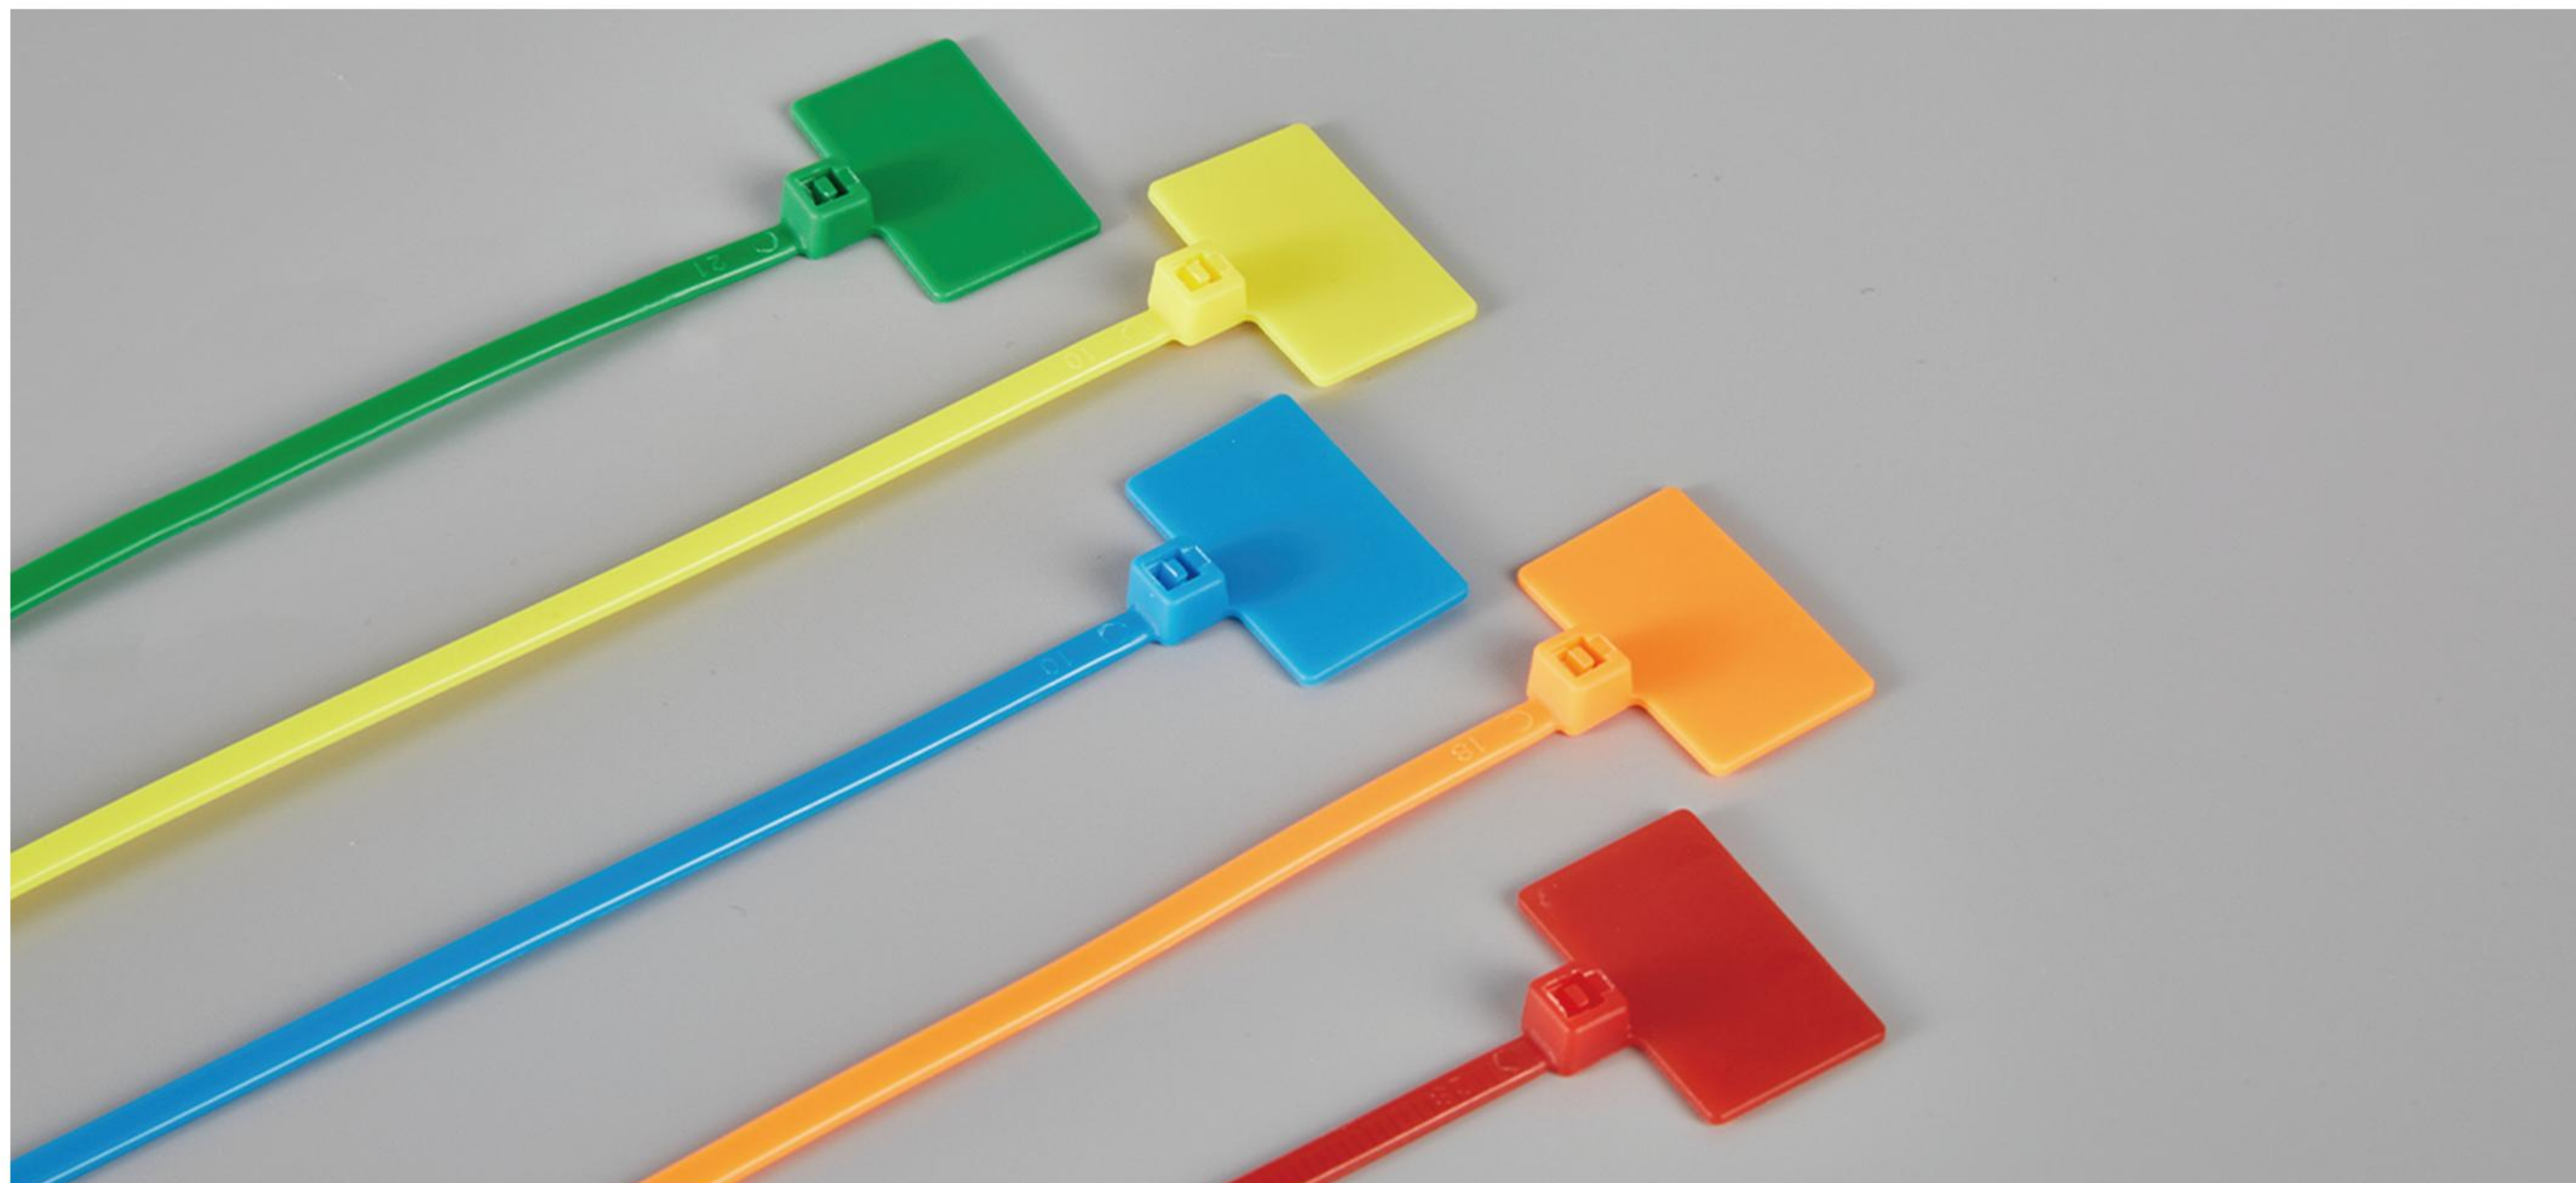


标牌扎带 Marker Cable Ties

- 1、Features: The tag on the front of the cable tie can be marked (handwritten, printed, laser, etc.) with letters, numbers, symbols to distinguish different items.
- 2、Material: UL Approved Nylon 66.
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：扎带正面的标签可以标注（手写、印刷、激光等）文字数字符号等，用于区分不同物品。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。

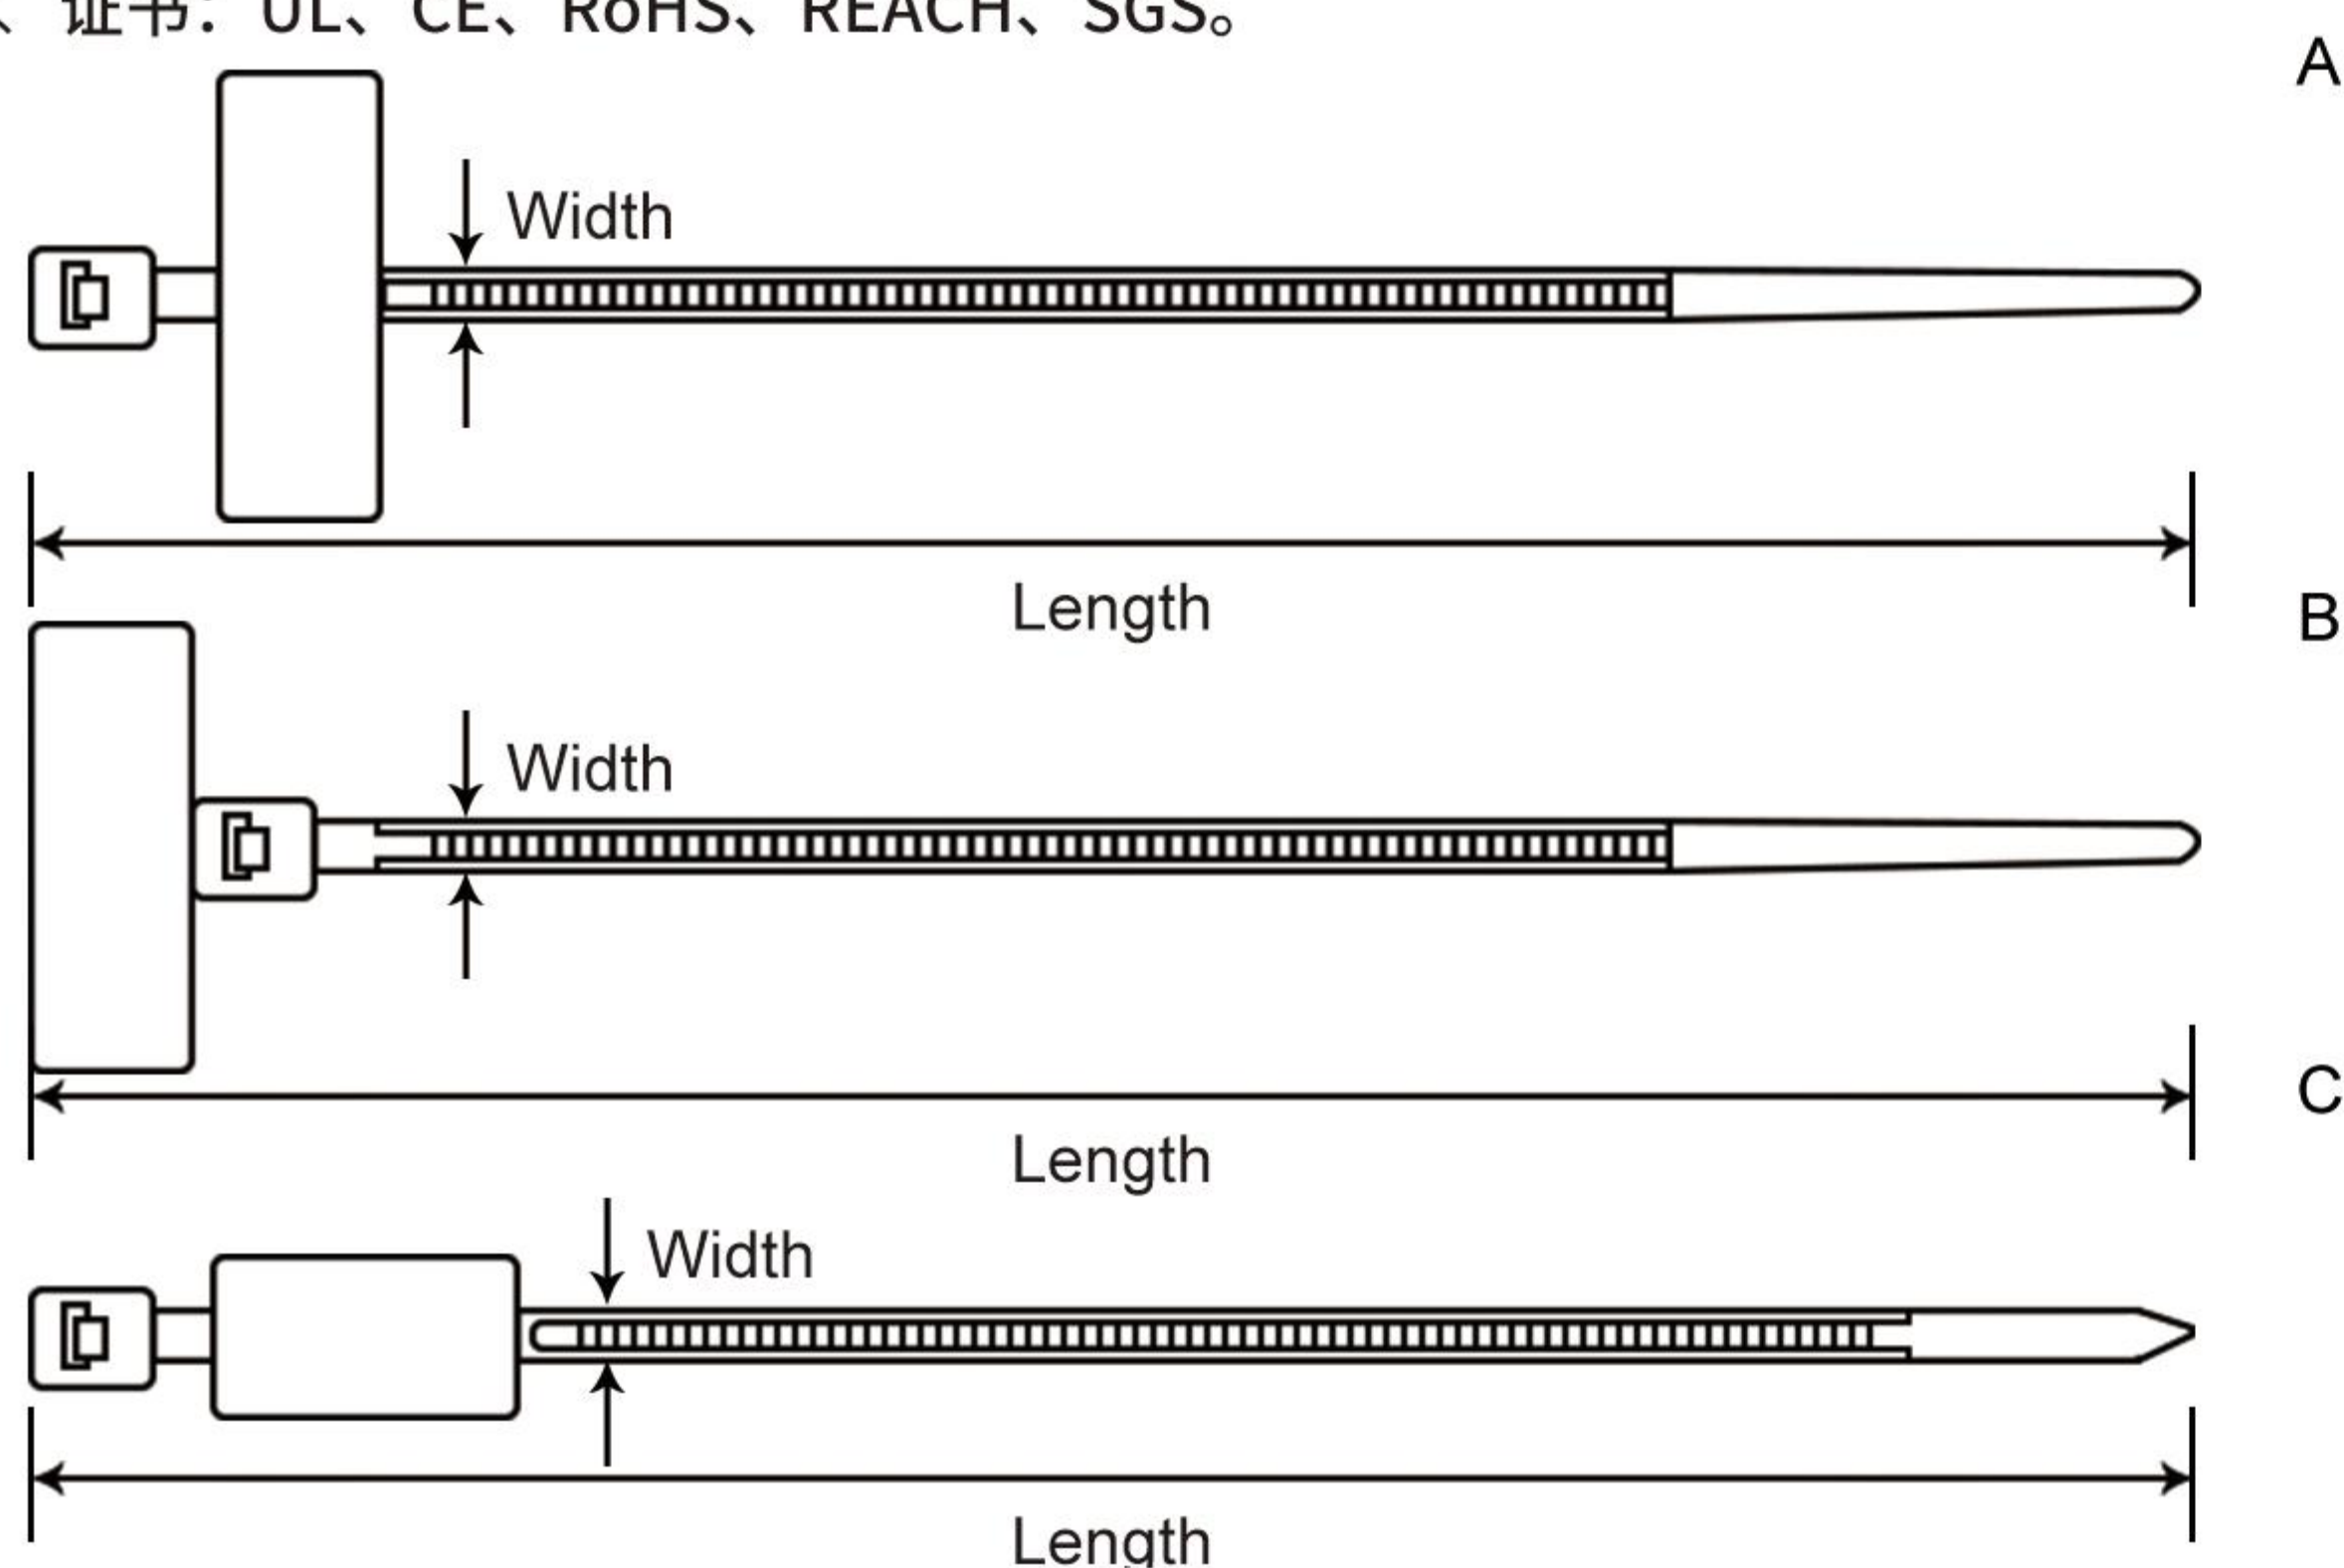



Item No.	Width(W)		Length(L)		Marker Size		Max.Bundle Dia. (E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-2.5x100MTA	2.5	0.1	100	4	8*25	0.31*1	22	0.87	18	8
NL-2.5x100MTB	2.5	0.1	100	4	13*20	0.51*0.79	22	0.87	18	8
NL-3x150MTB	3	0.12	150	6	15*25	0.59*1	35	1.34	30	14
NL-3x200MTB	3	0.12	200	8	15*25	0.59*1	53	2.09	30	14
NL-6x170MTC	5.5	0.22	170	6.7	10.8*36	0.43*1.42	42	1.65	55	25

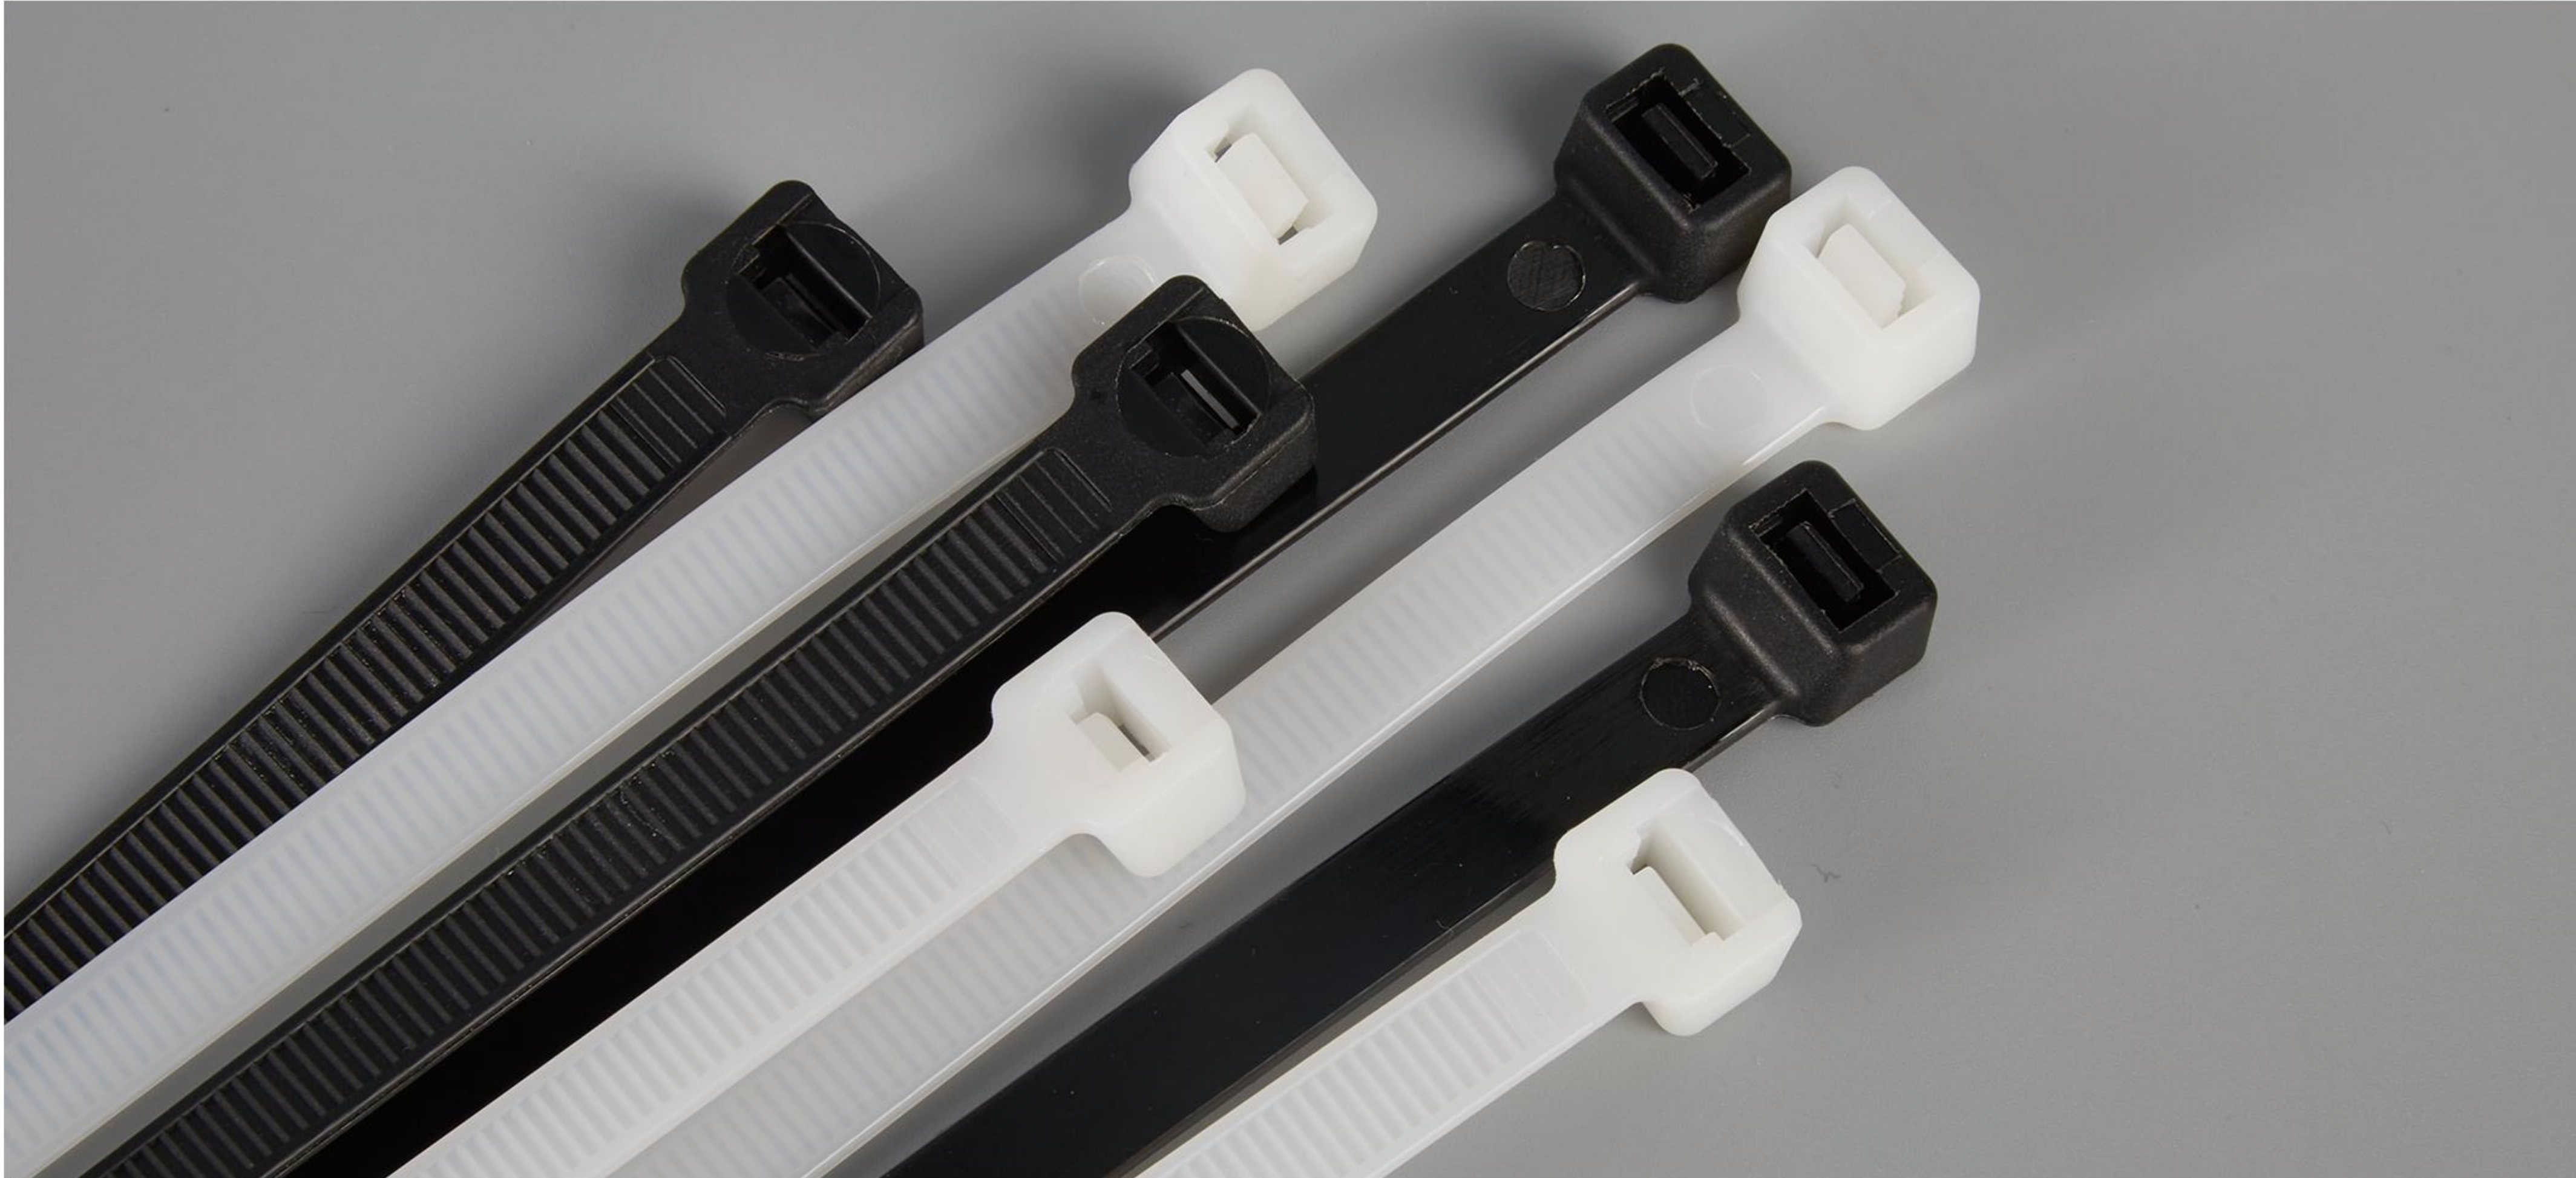

暖通空调专用扎带 HVAC Cable Ties

- 1、Features: Especially used in Heating Ventilation and Air Conditioning systems, Super tensile strength, Heat-resistance, Anti-Acid, Anti-ero sion, not easy to aging.
- 2、Material: UL Approved Nylon 66 .
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：专用于采暖通风空调系统，超强拉伸强度，耐热，耐酸，抗侵蚀，不易老化。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。

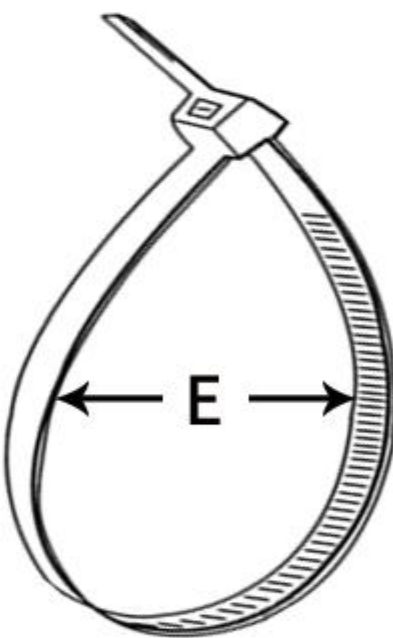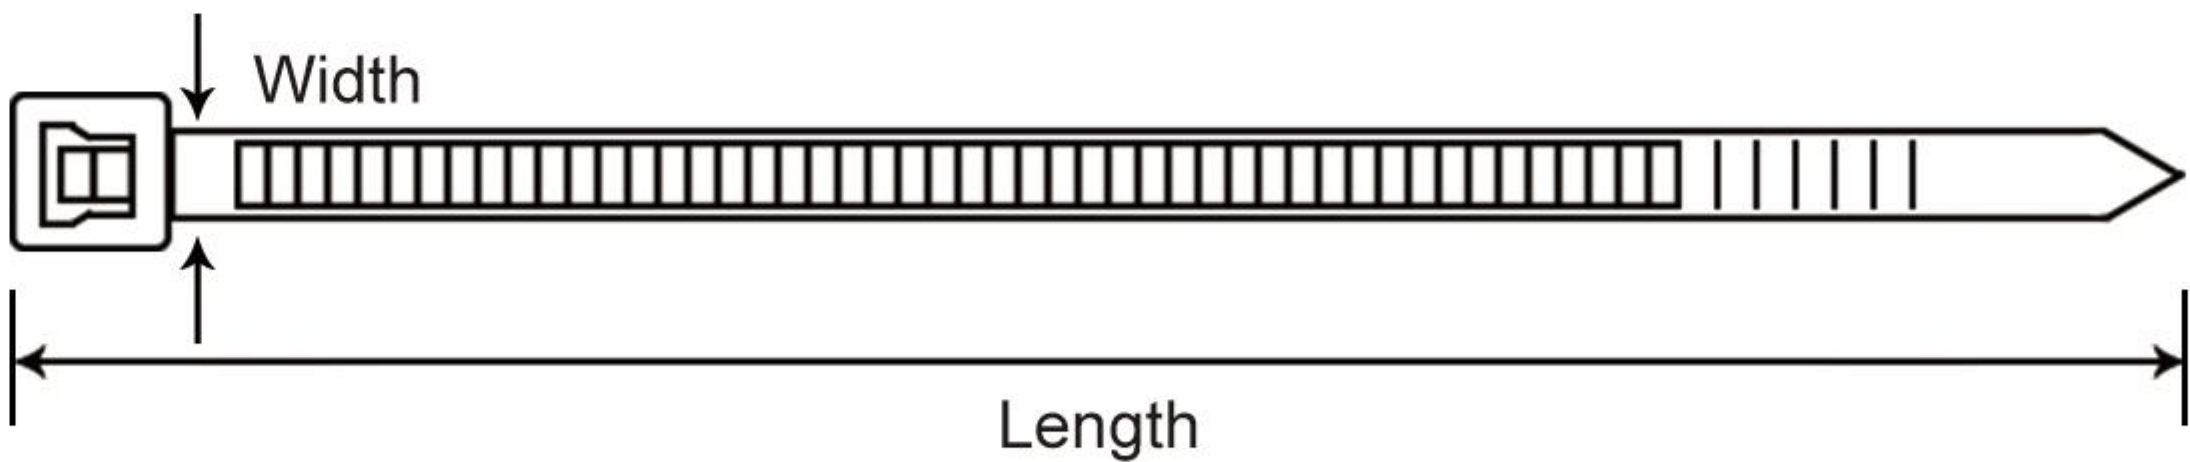

Max.Bundle Diameter



Min. Loop Tensile Strength



Item No.	Width(W)		Min. Loop Tensile Strength		Length(L)		Max. Bundle Dia. (E)	
	mm	inch	LBS	KGS	mm	inch	mm	inch
NL-10x800	9	0.35	175	80	800	31.5	234	9.21
NL-10x920	9	0.35	175	80	920	36.2	275	10.83
NL-10x1000	9	0.35	175	80	1000	39.4	292	11.5
NL-10x1200	9	0.35	175	80	1200	47.2	340	13.39
NL-10x1350	9	0.35	175	80	1350	53.1	380	14.96
NL-10x1500	9	0.35	175	80	1500	59.1	430	16.93
NL-12x800	12	0.47	250	114	800	31.5	234	9.21
NL-12x900	12	0.47	250	114	900	35.4	268	10.55
NL-12x1000	12	0.47	250	114	1000	39.4	292	11.5



双头扎带 Double Head Cable Ties

- 1、Features: The two heads are independent with opposite pawl. The tie can pass through the two heads in turn and band two articles together.
- 2、Material: UL Approved Nylon 66 .
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：拥有两个独立的头部，卡扣方向相反。扎带可依次穿过两头，将两件物品捆扎在一起。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。

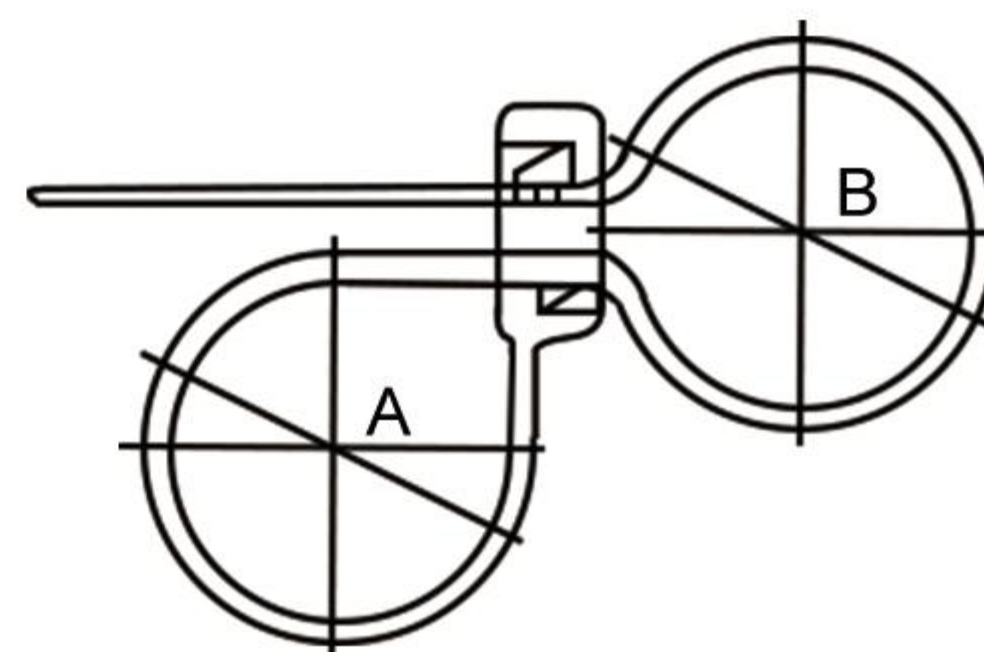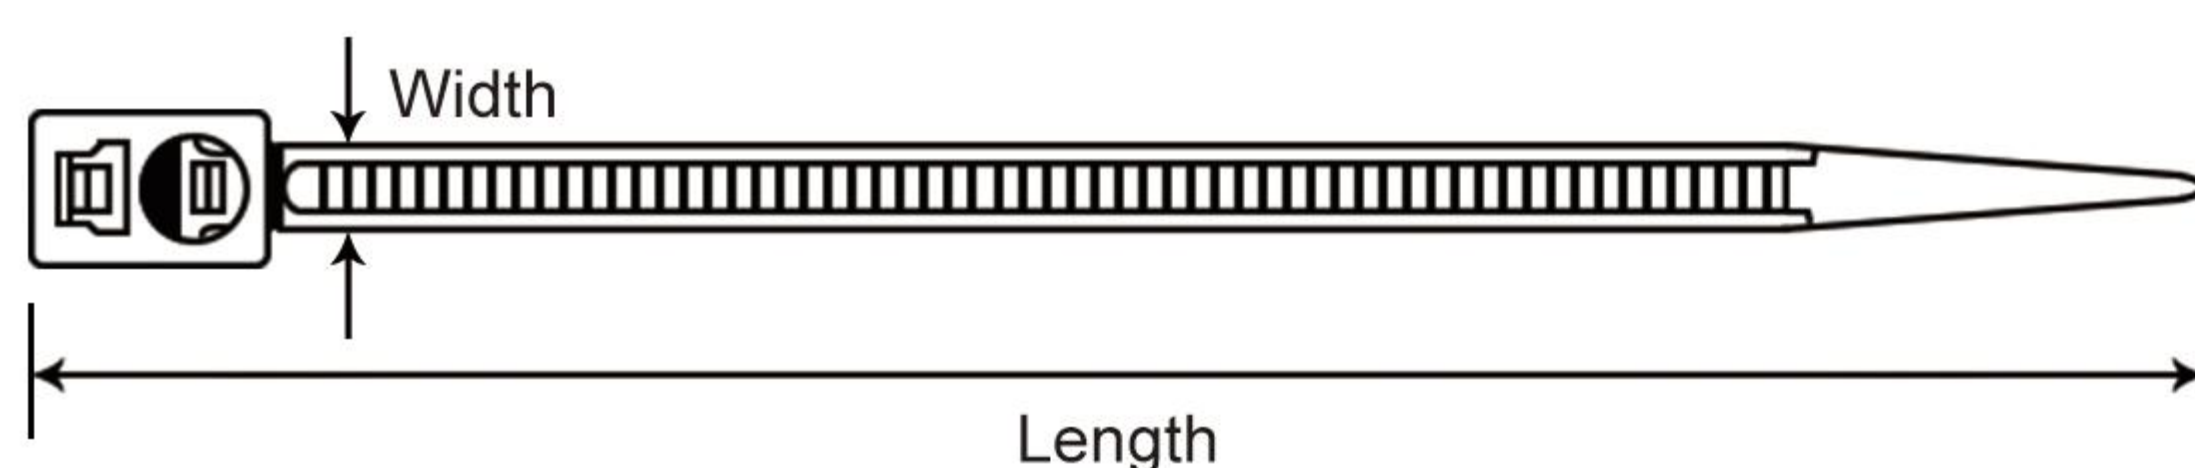


Item No.	Width(W)		Length(L)		Max.Bundle Dia. (E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-5x200DH	4.8	0.19	200	7.9	50	1.97	50	22
NL-5x250DH	4.8	0.19	250	9.8	65	2.56	50	22
NL-5x300DH	4.8	0.19	300	11.8	80	3.15	50	22
NL-5x370DH	4.8	0.19	370	14.6	102	4.02	50	22



双扣扎带 Double Locking Cable Ties

- 1、Features: Double Locking design has stronger tensile. The gripping teeth faces outside instead of inside, makes the cable ties fit the bundling surface tighter, and not easy to loose.
- 2、Material: UL Approved Nylon 66 .
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：双锁紧设计，拉力更强。夹紧齿朝外而不是朝内，使扎带与捆扎面贴合更紧密，不易松动。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。

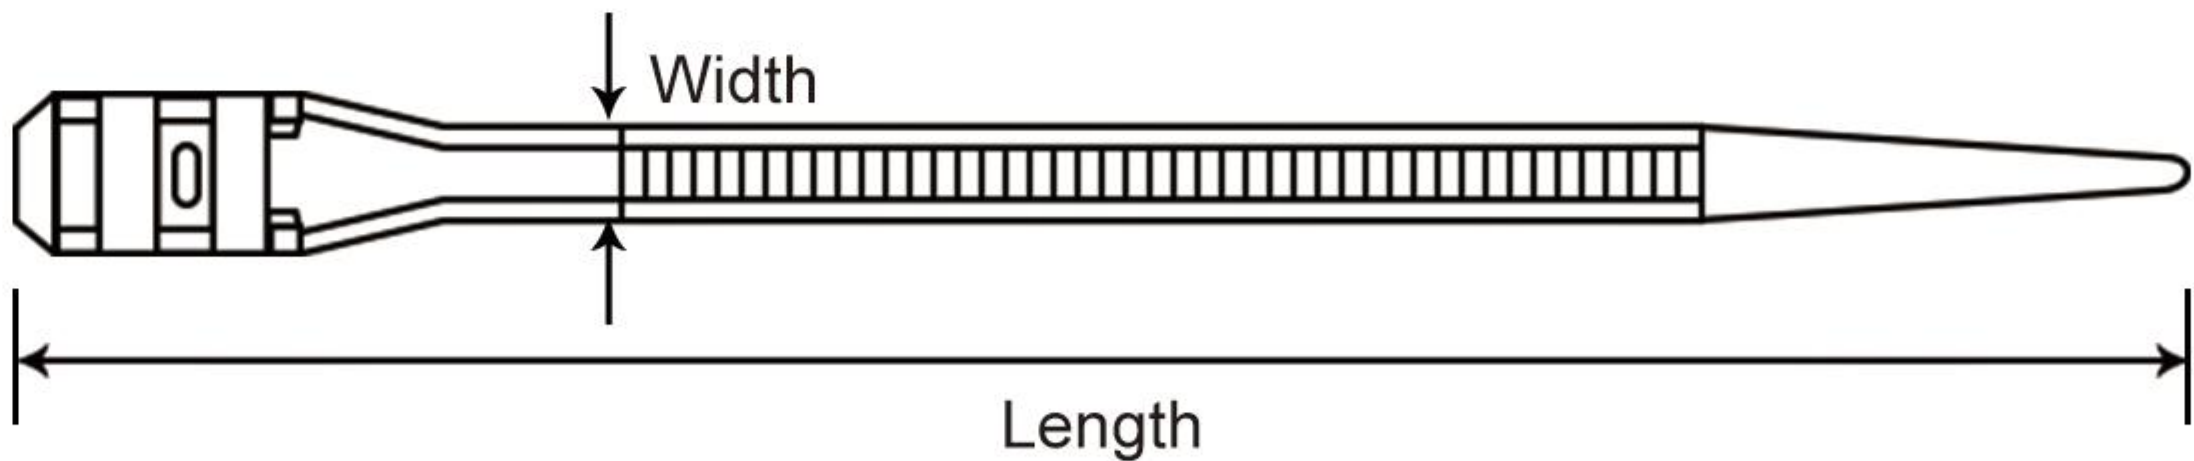

Item No.	Width(W)		Length(L)		Max.Bundle Dia. (E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-6x115DL	6	0.24	115	4.5	26	1.42	77	35
NL-6x180DL	6	0.24	180	7.1	40	2.09	77	35
NL-9x180DL	9	0.35	180	7.1	40	2.56	110	50
NL-9x260DL	9	0.35	260	10.2	62	3.15	110	50
NL-9x300DL	9	0.35	300	11.8	80	3.66	110	50
NL-9x350DL	9	0.35	350	13.8	93	4.02	110	50
NL-9x510DL	9	0.35	510	20.1	140	4.25	110	50
NL-9x760DL	9	0.35	760	29.9	220	4.88	110	50

手铐扎带 Handcuffs

- 1、Features: The Handcuffs like the connection of two cable ties, which can bind or fix two pipes or cables at the same time, also suitable for police, security guard or where someone need to be restrained.
- 2、Material: UL Approved Nylon 66 .
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：手铐扎带就像两条扎带的连接起来，可以同时捆绑或固定两根管道或电缆，也适用于警察、保安或需要合法约束某人的情形。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。



Item No.	Width(W)		Length(L)		Max.Bundle Dia. (E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-12x500HF	12	0.47	500	19.7	50	1.97	175	80
NL-12x700HF	12	0.47	700	27.6	80	3.15	250	114
NL-13x900HF	13	0.51	900	35.4	100	3.94	250	114

轮胎防滑扎带 Tire Antiskid Cable Ties

- 1、Features: Car anti-skid chain is designed for automotive safety. They are more easy to carry and use than traditional metal chains.
- 2、Material: UL Approved Nylon 66 .
- 3、Flammability: UL 94V-2.
- 4、Installation temperature: -20°C to 85°C
- 5、Working temperature: -40°C to 85°C
- 6、Color: Natural (white), Black, other colors are available as requested.
- 7、Certificates: UL, CE, RoHS, REACH, SGS.

- 1、特点：汽车防滑链专为汽车安全而设计，比传统的金属防滑链更易于携带和使用。
- 2、材料：UL 认可的尼龙 66。
- 3、阻燃性：UL 94V-2。
- 4、安装温度：-20°C 至 85°C。
- 5、工作温度：-40°C 至 85°C。
- 6、颜色：自然色（白色）、黑色，其他颜色可根据要求提供。
- 7、证书：UL、CE、RoHS、REACH、SGS。



Item No.	Width(W)		Length(L)		Max.Bundle Dia. (E)		Min.loop tensile strength	
	mm	inch	mm	inch	mm	inch	LBS	KGS
NL-9x900CT	9	0.35	900	35.4	251	9.9	175	80

双面卡齿扎带
Double-side Teeth Cable Ties

- 1、Features: Double-sided teeth cable ties has teeth on both sides of the body, the buckle in the head and the other side both have anti-release teeth, make the tension strength of the cable tie increase by more than 20%. Super tensile strength, Anti-Acid, Anti-erosion, not easy to aging.

2、Material: UL Approved Nylon 66.

3、Flammability: UL 94V-2.

4、Installation temperature: -20℃ to 85℃

5、Working temperature: -40℃ to 85℃

6、Color: Natural (white), Black, other colors are available as requested.

7、Certificates: UL, CE, RoHS, REACH, SGS.
- 1、特点：双面齿扎带在本体两侧均有齿，头部和另一侧的卡扣均有防脱齿，使扎带的拉力强度提高20%以上。超强抗拉强度，耐酸碱，耐腐蚀，不易老化。

2、材料：UL 认可的尼龙 66。

3、阻燃性：UL 94V-2。

4、安装温度：-20℃ 至 85℃。

5、工作温度：-40℃ 至 85℃。

6、颜色：本色（白色），黑色，其他颜色可根据要求提供。

7、证书：UL、CE、RoHS、REACH、SGS。



Item No.	Width(W)		Min.loop tensile strength		Length(L)		Max.Bundle Dia. (E)	
	mm	inch	LBS	KGS	mm	inch	mm	inch
NLDT-5x200	4.5	0.18	75	34	200	8	53	2.09
NLDT-5x280					280	11	75	2.95
NLDT-5x360					360	14	98	3.86

魔术贴扎带
Hook and Loop Cable Ties

- 1、Features: The hook and loop cable ties also called magic cable ties, velcro cable ties, which are Resusable, suitable for bundling LAN cable, signal line, powe line, can avoid the transmission rate effected by normal nylon cable tie when tightening too much.

2、Material: Hook Side is made of PP, Loop Side is made of Nylon.

3、Color: White, Black, Yellow, Green, Blue, Red, other colors and sizes are available as requested.
- 1、特点：钩环扎带也叫魔术扎带、尼龙搭扣，可重复使用，适用于捆绑网线、信号线、电源线，可避免普通尼龙扎带过紧而影响传输速率。

2、材料：钩面为PP材质，反面为尼龙材质。

3、颜色：白色、黑色、黄色、绿色、蓝色、红色，其他颜色和尺寸可按要求提供。



Item No.	Width(W)		Length(L)		Max.Bundle Dia. (E)	
	mm	inch	mm	inch	mm	inch
NL-12x100HL	12	0.47	100	4	22	0.87
NL-12x150HL	12	0.47	150	5.9	35	1.38
NL-12x200HL	12	0.47	200	7.9	50	1.97
NL-12x250HL	12	0.47	250	9.8	65	2.56
NL-12x300HL	12	0.47	300	11.8	80	3.15
NL-16x200HL	16	0.63	200	7.9	50	1.97
NL-16x250HL	16	0.63	250	9.8	65	2.56
NL-16x300HL	16	0.63	300	11.8	80	3.15
NL-16x400HL	16	0.63	400	15.7	110	4.33
NL-16x500HL	16	0.63	500	19.7	140	5.51

定制包装 Custom Packaging OEM&ODM



出口包装100/PCS Popular Packing



吊卡包装 Hanging Card Packing



纸盒包装 Paper Box Packing



OPP袋组合包装 OPP Packing



泡壳包装 Blister Packing



牛利品牌包装 NLZD Brand Packing

定制包装
Custom Packaging OEM&ODM

