


尼龙扎带系列

Nylon Cable Ties



Nylon Cable Ties 尼龙扎带


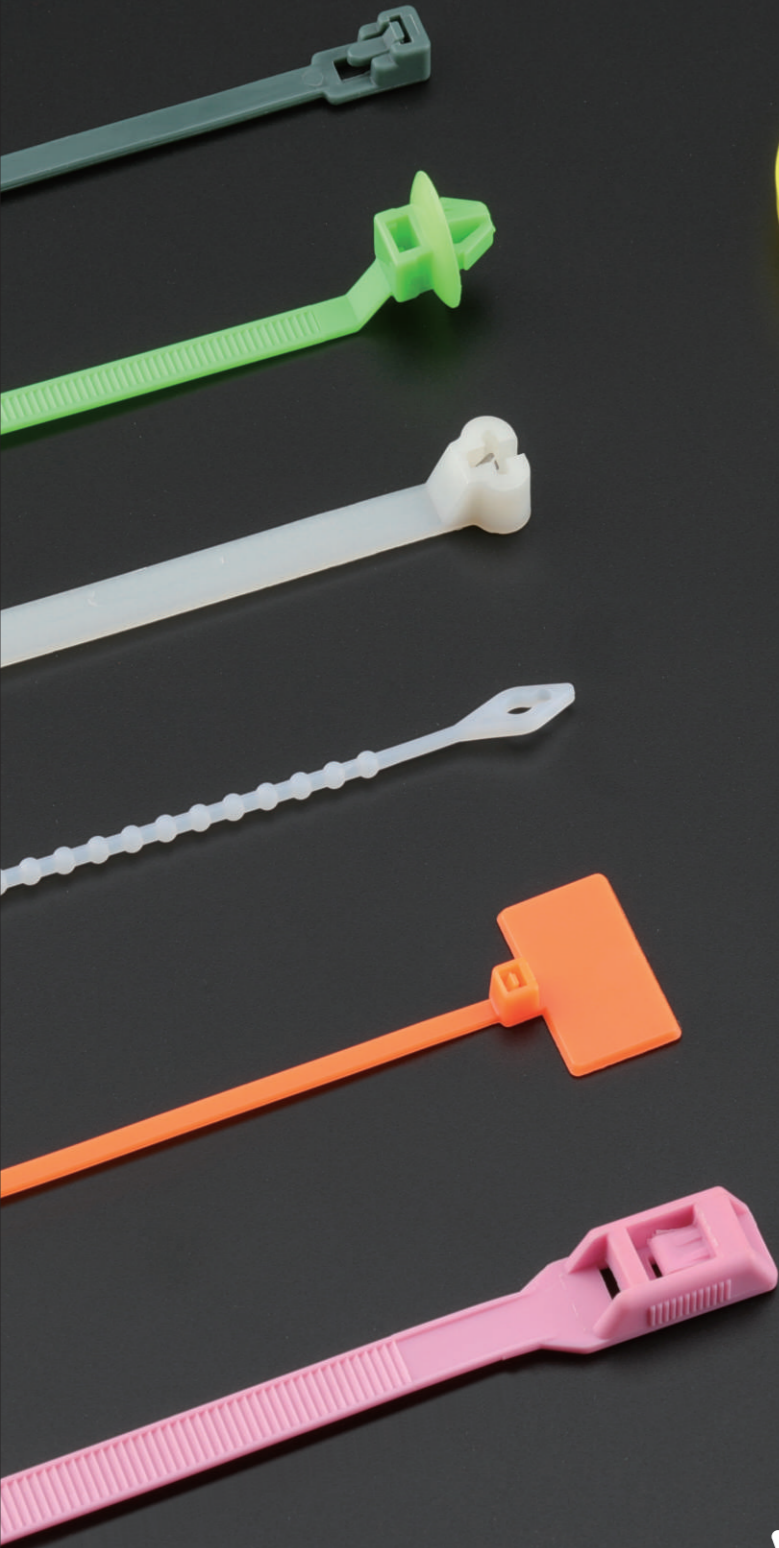


Self-Locking Cable Ties 自锁式尼龙扎带



Material: UL approved Nylon 66, Flammability 94V-2;
Color: Standard color is natural, UV resistant black and other special colors are available upon request;
Operating temperature: -35°C to 85°C (-35°F to 185°F), Special heat or ice resistant ties are available upon request;
Certificates: UL, CE, ROHS, SGS;
Feature: Eco-friendly, good tensile strength and insulation, acid and alkali resistant, not easy to get aging.


材质: 采用UL认可的尼龙66料制成, 防火等级94V-2;
颜色: 标准颜色为白色, 抗紫外线之黑色, 特殊颜色欢迎定做;
操作温度: -35°C to 85°C (-35°F to 185°F), 特殊耐寒耐高温扎带可以定做;
国际认证: UL, CE, ROHS, SGS;
产品特性: 产品环保, 可在工业, 日常生活中广泛应用, 绝缘性好, 承受力强, 耐酸碱, 不易老化。

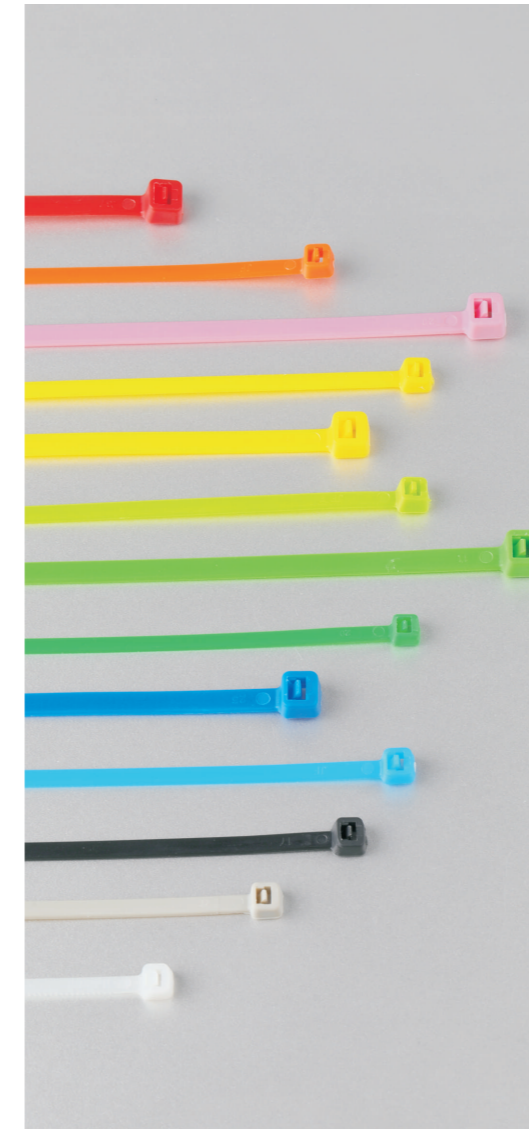

类别 Type	型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
		inch	mm			LBS	kgs
Miniture	NL-3x80	3-3/16"	80	2.5	2-16	18	8
	NL-3x100	4"	100	2.5	2-22	18	8
	NL-3x150	6"	150	2.5	2-35	18	8
Intermediate	NL-3x200	8"	200	2.5	2-50	18	8
	NL-4x120	4-3/4"	120	3.6	2-30	40	18
	NL-4x150	6"	150	3.6	3-35	40	18
	NL-4x200	8"	200	3.6	3-50	40	18
	NL-4x250	10"	250	3.6	3-65	40	18
	NL-4x300	11-5/8"	300	3.6	3-80	40	18
	NL-4x350	13-3/4"	350	3.6	3-90	40	18
Standard	NL-4x370	14-1/4"	370	3.6	3-102	40	18
	NL-5x150	6"	150	4.8	3-35	50	22
	NL-5x200	8"	200	4.8	3-50	50	22
	NL-5x250	10"	250	4.8	3-65	50	22
	NL-5x300	11-5/8"	300	4.8	3-80	50	22
	NL-5x350	13-3/4"	350	4.8	3-90	50	22
	NL-5x380	15"	380	4.8	3-102	50	22
	NL-5x400	15-3/4"	400	4.8	3-105	50	22
	NL-5x450	17-3/4"	450	4.8	3-130	50	22
	NL-5x500	19-11/16"	500	4.8	3-150	50	22
NL-5x550	21-1/16"	550	4.8	3-160	50	22	




Self-Locking Cable Ties
自锁式尼龙扎带

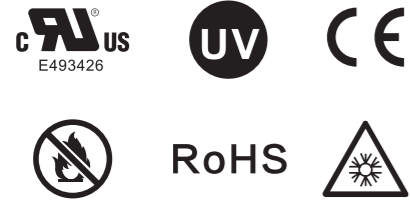

Material: UL approved Nylon 66, Flammability 94V-2;
Color: Standard color is natural, UV resistant black and other special colors are available upon request;
Operating temperature: -35°C to 85°C (-35°F to 185°F), Special Heat or ice resistant ties are available upon request;
Certificates: UL, CE, ROHS, SGS;
Feature: Eco-friendly, good tensile strength and insulation, acid and alkali resistant, not easy to get aging.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2;
颜色: 标准颜色为白色, 抗紫外线之黑色, 特殊颜色欢迎定做。
操作温度: -35°C to 85°C (-35°F to 185°F), 特殊耐寒耐高温扎带可以定做;
国际认证: UL, CE, ROHS, SGS;
产品特性: 产品环保, 可在工业, 日常生活中广泛应用, 绝缘性好, 承受力强, 耐酸碱, 不易老化。

类别 Type	型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
		inch	mm			LBS	kgs
Heavy Duty	NL-8x200	8"	200	7.6	3-50	120	55
	NL-8x250	10"	250	7.6	4-65	120	55
	NL-8x300	11-5/8"	300	7.6	4-80	120	55
	NL-8x350	13-3/4"	350	7.6	4-90	120	55
	NL-8x380	15"	380	7.6	4-102	120	55
	NL-8x400	15-3/4"	400	7.6	4-105	120	55
	NL-8x450	17-3/4"	450	7.6	4-130	120	55
	NL-8x500	19-11/16"	500	7.6	4-150	120	55
	NL-8x550	21-1/16"	550	7.6	4-160	120	55
	NL-10x400	15-3/4"	400	8.8	4-105	175	80
	NL-10x450	17-3/4"	450	8.8	4-130	175	80
	NL-10x500	19-11/16"	500	8.8	4-150	175	80
	NL-10x550	21-1/16"	550	8.8	8-160	175	80
	NL-10x600	23-5/8"	600	8.8	8-170	175	80
	NL-10x650	25-9/16"	650	8.8	8-190	175	80
	NL-10x720	28-1/3"	720	8.8	10-210	175	80
	NL-10x760	30"	760	8.8	10-225	175	80
	NL-10x800	31-1/2"	800	8.8	10-235	175	80
	NL-10x850	33-1/2"	850	8.8	10-250	175	80
	NL-10x900	35-2/5"	900	8.8	10-260	175	80
NL-10x1000	39-2/5"	1000	8.8	10-295	175	80	
NL-10x1200	47-1/5"	1200	8.8	10-340	175	80	
NL-12x650	25-9/16"	650	12	12-190	250	114	
NL-12x760	30"	760	12	12-220	250	114	



Self-Locking Cable Ties
自锁式尼龙扎带



Material: UL approved Nylon 66, Flammability 94V-2;
Color: Standard color is natural, UV resistant black and other special colors are available upon request;
Operating temperature: -35°C to 85°C (-35°F to 185°F), Special Heat or ice resistant ties are available upon request;
Certificates: UL, CE, ROHS, SGS;
Feature: Eco-friendly, good tensile strength and insulation, acid and alkali resistant, not easy to get aging.

材质: 采用UL认可的尼龙66料制成, 防火等级94V-2;
颜色: 标准颜色为白色, 抗紫外线之黑色, 特殊颜色欢迎定做。
操作温度: -35°C to 85°C (-35°F to 185°F), 特殊耐寒耐高温扎带可以定做;
国际认证: UL, CE, ROHS, SGS;
产品特性: 产品环保, 可在工业, 日常生活中广泛应用, 绝缘性好, 承受力强, 耐酸碱, 不易老化。

类别 Type	型号 Item NO.	长L Length		宽W Width	捆扎范围E Bundle Dia.	拉力 Min. Loop Tensile Strength	
		inch	mm			LBS	kgs
New NLZD Size	NL-1.9X80	3-3/16"	80	1.9	2-16	14	6.5
	NL-1.9X100	4"	100	1.9	2-22	14	6.5
	NL-1.9X150	6"	150	1.9	2-35	14	6.5
	NL-1.9X200	8"	200	1.9	2-53	14	6.5
	NL-2.7x200	8"	200	2.7	2-53	33	15
	NL-2.7x250	10"	250	2.7	2-65	33	15
	NL-2.7x300	11-5/8"	300	2.7	2-80	33	15
	NL-3.0*150	6"	150	3.0	2-35	40	18
	NL-3.0*200	8"	200	3.0	2-53	40	18
	NL-3.0*250	10"	250	3.0	2-65	40	18
	NL-3.0*300	11-5/8"	300	3.0	2-80	40	18
	NL-5.2x200	8"	200	5.2	4-53	78	35
	NL-5.2x250	10"	250	5.2	4-65	78	35
	NL-5.2x300	11-5/8"	300	5.2	4-82	78	35
	NL-5.2x350	13-3/4"	350	5.2	4-90	78	35
	NL-5.2x400	15-3/4"	400	5.2	4-108	78	35
	NL-5.2x450	17-3/4"	450	5.2	4-130	78	35
	NL-5.2x500	19-11/16"	500	5.2	4-150	78	35
	NL-5.8x200	8"	200	5.8	6-53	88	40
	NL-5.8x250	10"	250	5.8	6-65	88	40
	NL-5.8x300	11-5/8"	300	5.8	6-82	88	40
	NL-5.8x350	13-3/4"	350	5.8	6-90	88	40
	NL-5.8x400	15-3/4"	400	5.8	6-108	88	40
	NL-5.8x450	17-3/4"	450	5.8	6-130	88	40
	NL-5.8x500	19-11/16"	500	5.8	6-150	88	40

