

△ 本广告资料由牛利电气印制，仅用于说明本系列产品的相关信息。牛利电气随时可能因技术升级或采用更新的生产工艺而改进本手册有关内容，或对本手册的印刷错误及不准确的信息进行必要的改进或更改，恕不另行通知。商家订货时请随时联系本公司，以证实相关信息。
We reserve the right to make technical changes or modify the contents of this document without prior notice. All the agreed particulars shall prevail. All Right Reserved.

♻️ 采用环保纸印刷
Use of environmentally friendly printing paper


© 浙江牛利电气有限公司版权所有
ZHEJIANG NIULI ELECTRIC CO., LTD. All Right Reserved



诚信·专业·高效·共赢

NLZD® 牛利

STAINLESS STEEL PRODUCT GUIDE
不锈钢产品手册

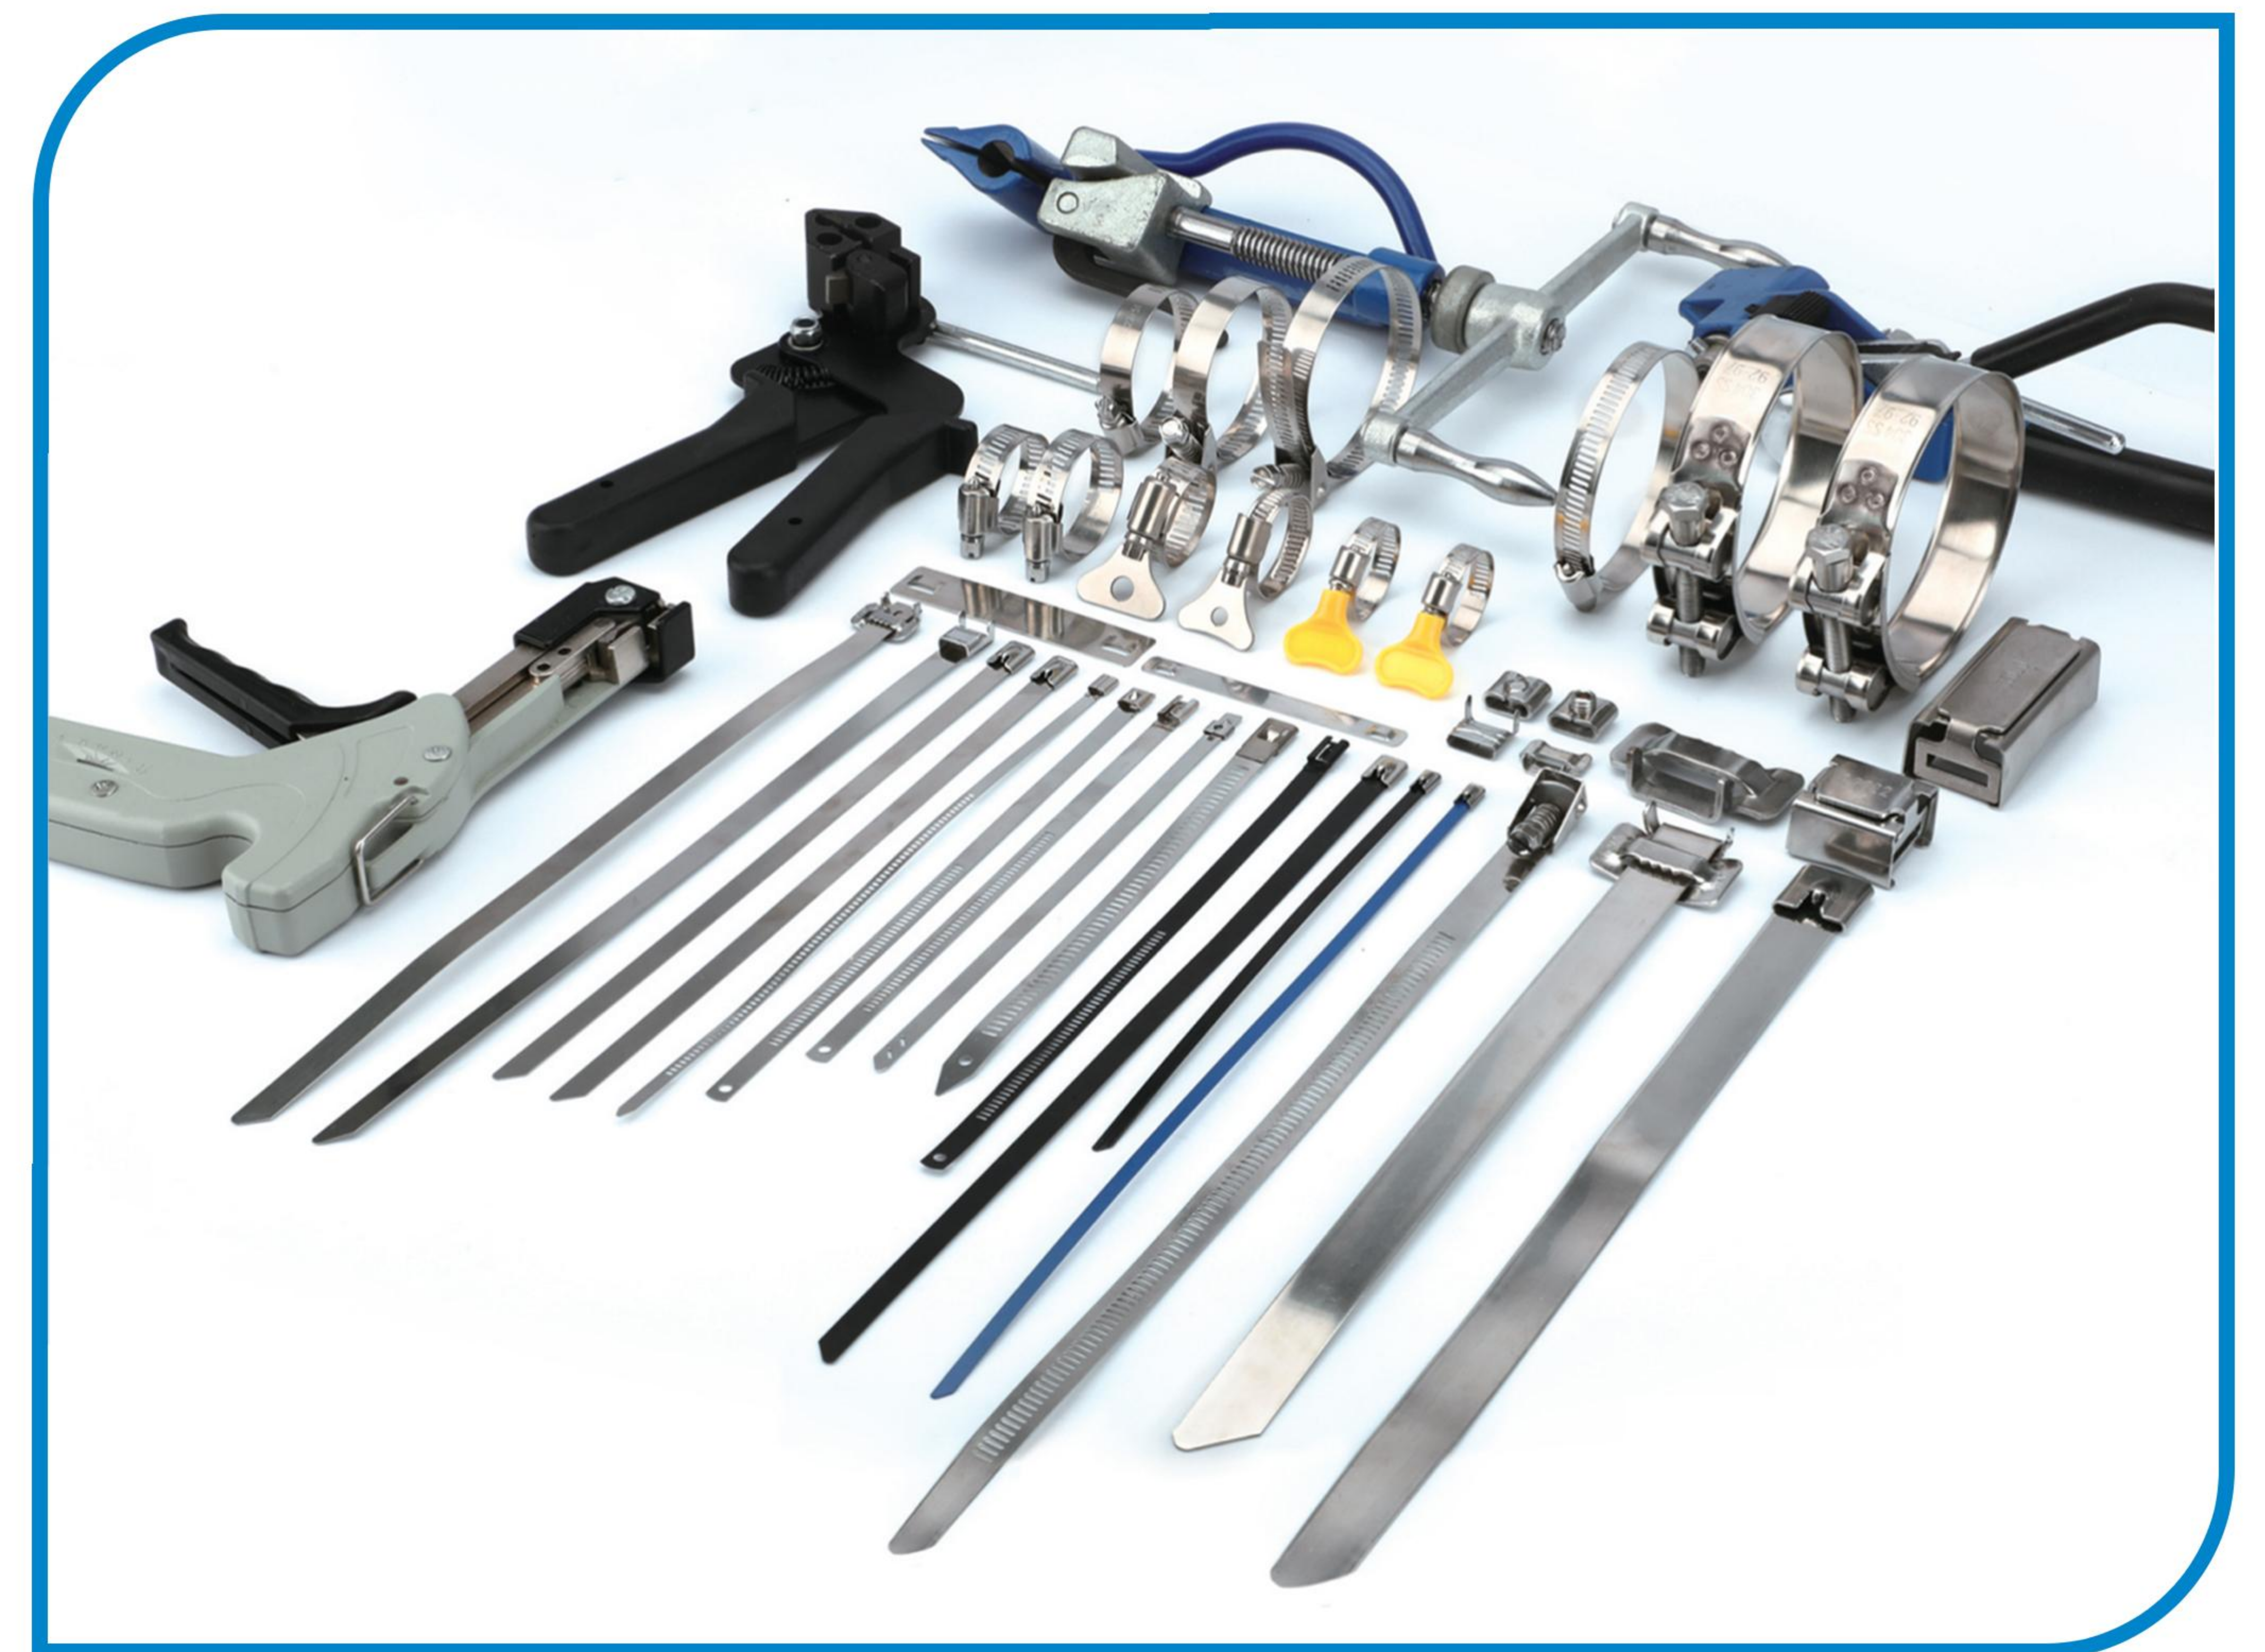

NLZD® 牛利 浙江牛利电气有限公司
ZHEJIANG NIULI ELECTRIC CO., LTD.

Add: Mushanhou Village, Liushi Town, Yueqing city,
Wenzhou 325604 China
Tel: +86 0577 62696950
Fax: +86 0577 62698650
Email: niuli01@zjnlzd.cn
Wed: www.zjnlzd.cn

地址：浙江省乐清市柳市镇木山后五二一路5弄3号
浙江省乐清市经济开发区纬五路187号（生产基地）
电话：0577-62696950
传真：0577-62698650
邮箱：niuli01@zjnlzd.cn
网址：www.zjnlzd.cn



Visit Official Website
扫一扫访问官网

浙江牛利电气有限公司
ZHEJIANG NIULI ELECTRIC CO., LTD.


企业简介 Enterprise Profile

浙江牛利电气有限公司，是一家领先全系列不锈钢喉箍，不锈钢扎带及电缆配件供应商，并拥有注册品牌NLZD。公司创立于中国电气之都--浙江乐清柳市镇，受益于地区发达的行业产业链和便利的交通，牛利电气经过不断的扩大生产规格和充实人才队伍，拥有了独立的研发、设计、制造、测试能力和及时高效的海内外销售及售后服务能力，生产的产品钢钒应用于汽车、船舶、机床、电力、通讯、建筑、消防等行业以及日常家庭生活当中。

Zhejiang Niuli Electric Co., Ltd. is a leading supplier of a full range of stainless steel hose clamps, stainless steel cable ties and cable accessories, and owns the registered brand NLZD. The company was founded in Liushi Town, Yueqing, Zhejiang, the electrical capital of China. Benefiting from the developed industrial chain and convenient transportation in the region, Niuli Electric has continuously expanded its production specifications and enriched its talent team. It has independent research and development, design, Manufacturing, testing capabilities and timely and efficient domestic and overseas sales and after-sales service capabilities, the steel and vanadium products produced are used in automobiles, ships, machine tools, electric power, communications, construction, fire protection and other industries as well as in daily family life.

生产车间 Production Workshop

每一步都精益求精，公司不断创新，追求更高的标准。
We strive for perfection every step of the way, and the company continues to innovate and pursue higher standards.

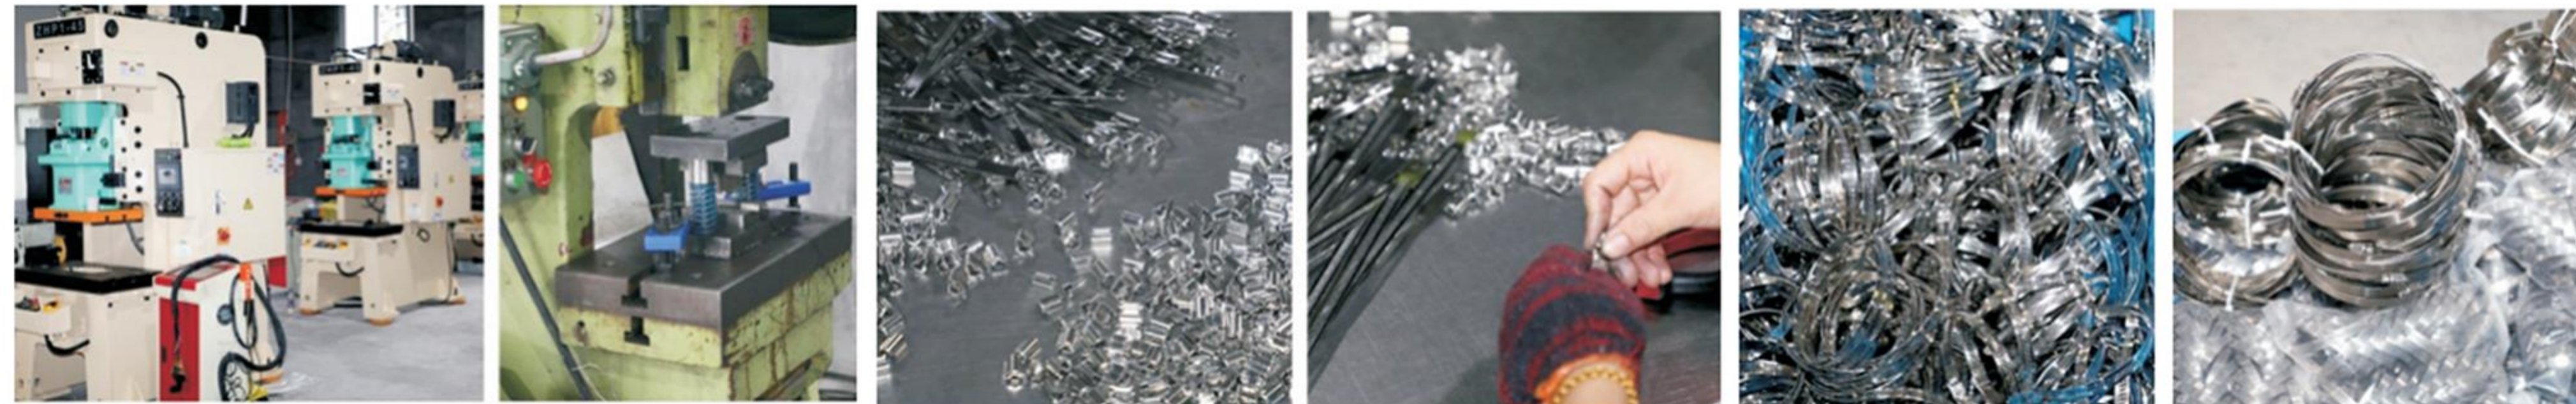

应用领域 Application Field

可用于汽车、船舶、机床、电力、建筑、通讯、建筑监控、消防等诸多行业。
It can be used in many industries such as automobiles, ships, machine tools, electric power, construction, communication, building monitoring, fire protection and so on.



汽车 Car 船舶 Ship 监控 Monitor 机床 Machine tool 电力 Electricity 通讯 Communication

A喉箍系列


- 01-02 / 美式不锈钢喉箍
American stainless steel hose clamp
- 03 / 美式不锈钢手柄喉箍
American stainless steel handle throat hoop
- 04 / 美式塑料手柄喉箍
American plastic handle hose clamp
- 05 / 小美式不锈钢喉箍
Small American stainless steel hose clamp

B扎带系列

- 07-08 / 圆珠自锁式不锈钢自锁扎带
Ball bead self-locking stainless steel self-locking cable tie
- 09-10 / 阶梯自锁式不锈钢扎带
PVC Coated Stainless Steel Cable Ties
- 11-12 / PVC涂层不锈钢扎带
Ladder self-locking stainless steel cable tie
- 13-14 / L型不锈钢扎带
L-shaped stainless steel cable tie
- 15 / L型不锈钢打包扣
L-shaped stainless steel packing buckle
- 16 / 牙型不锈钢打包扣
Tooth type stainless steel packing buckle

C工具系列

- 17-18 / 不锈钢扎带工具
Ball bead self-locking stainless steel self-locking cable tie

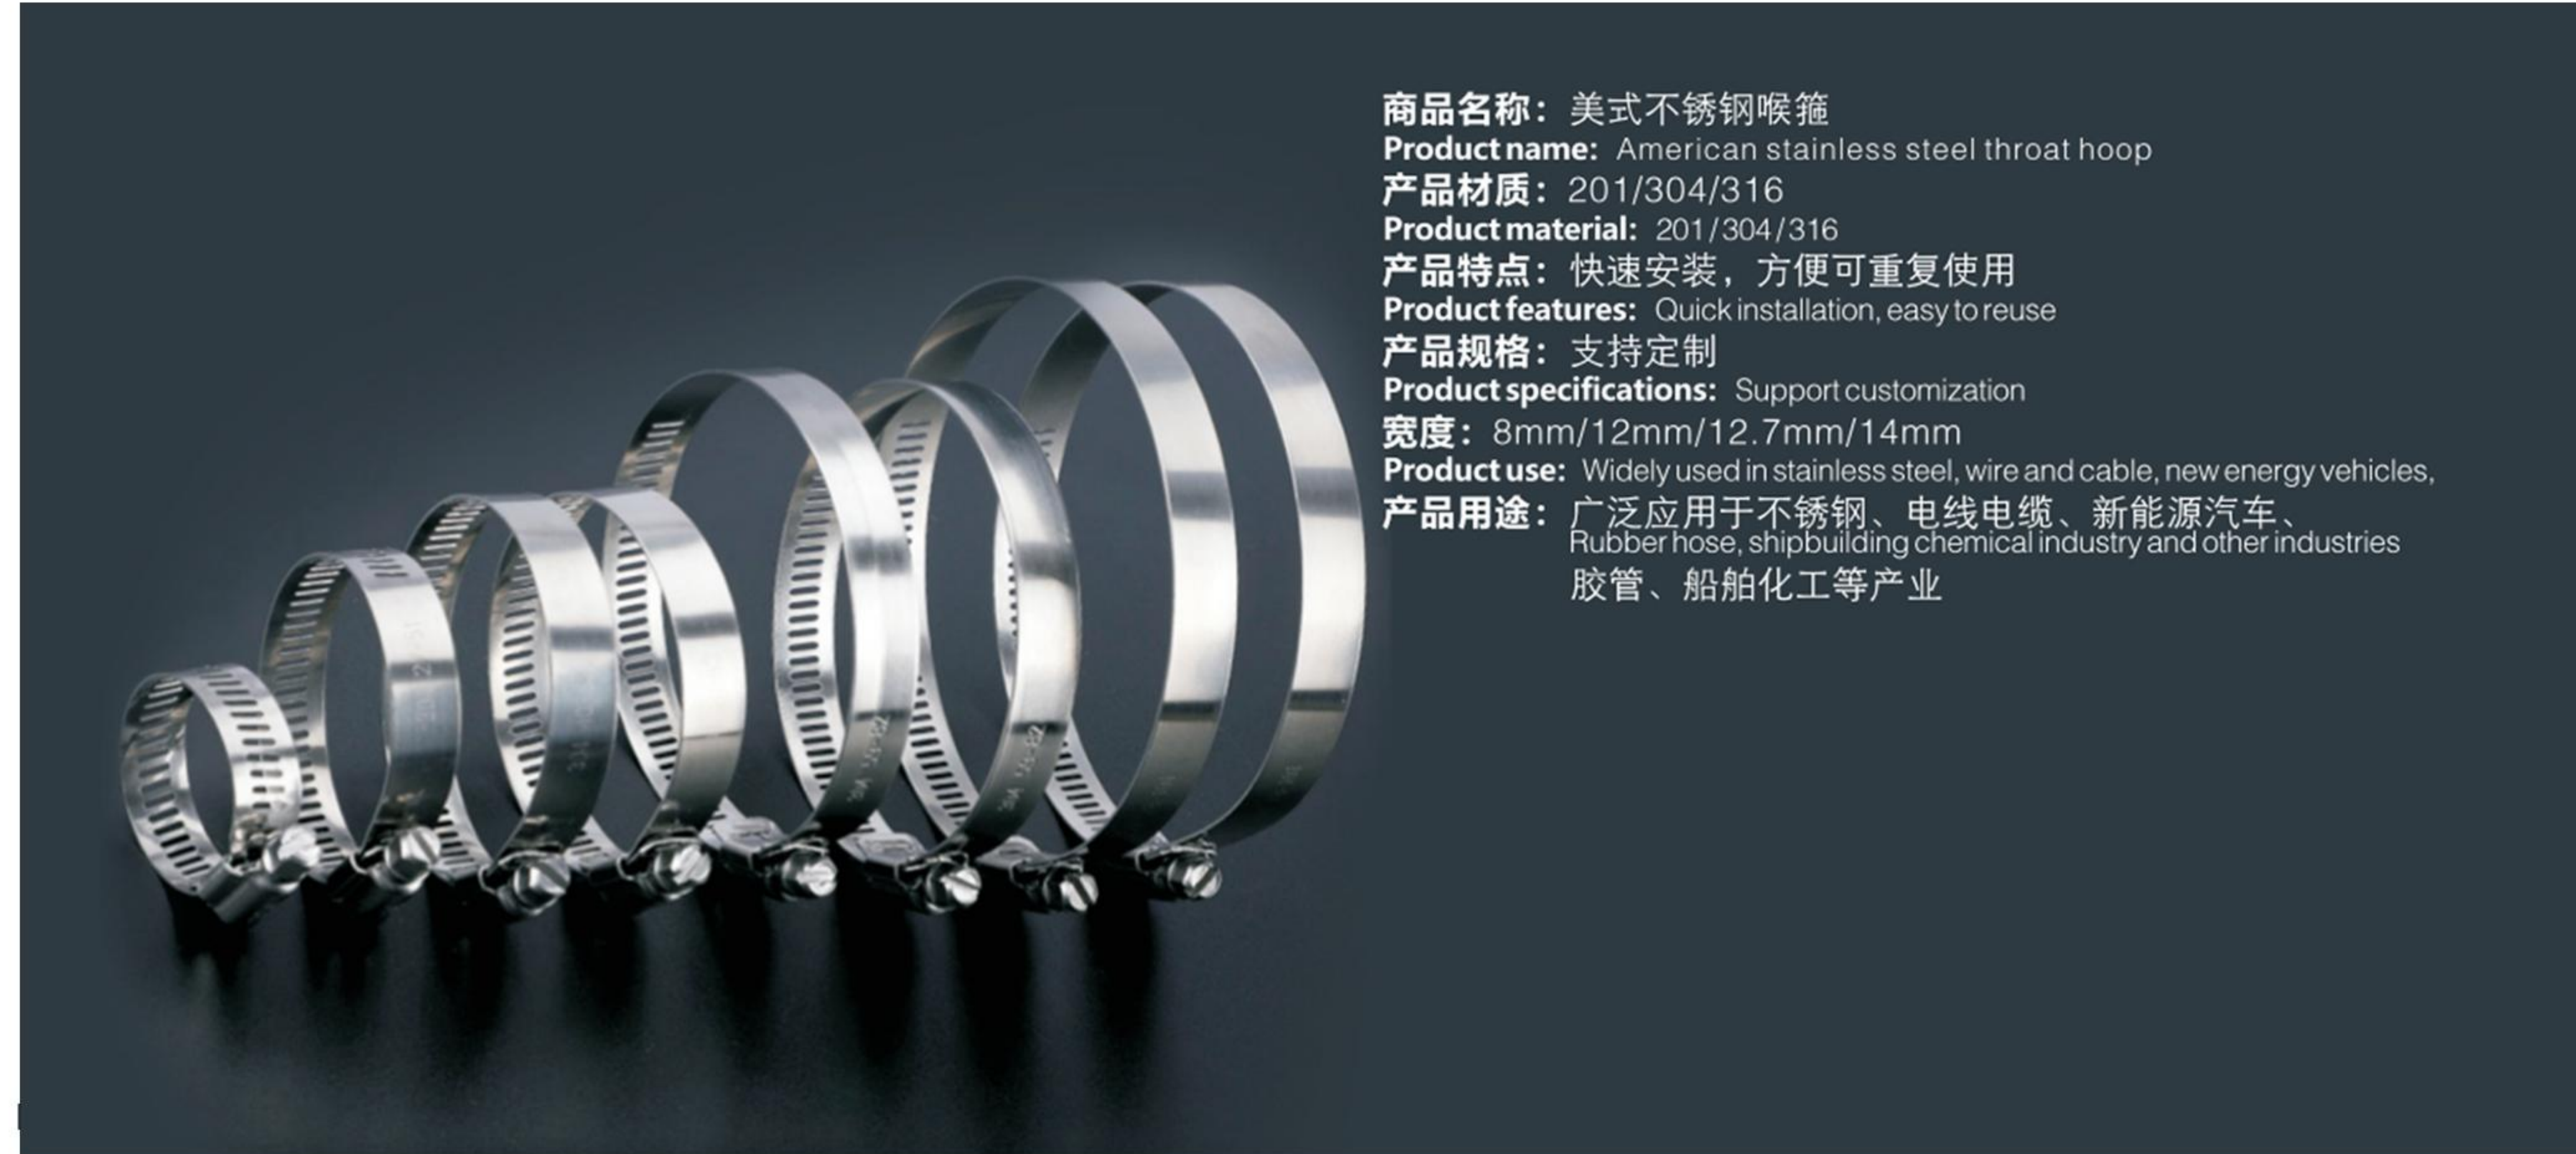

商品名称: 美式不锈钢喉箍
Product name: American stainless steel throat hoop
产品材质: 201/304/316
Product material: 201/304/316
产品特点: 快速安装, 方便可重复使用
Product features: Quick installation, easy to reuse
产品规格: 支持定制
Product specifications: Support customization
宽度: 8mm/12mm/12.7mm/14mm
Product use: Widely used in stainless steel, wire and cable, new energy vehicles,
产品用途: 广泛应用于不锈钢、电线电缆、新能源汽车、
Rubber hose, shipbuilding chemical industry and other industries
胶管、船舶化工等产业



喉箍锁头304不锈钢
Throat hoop lock 304 stainless steel



一字紧固螺丝, 内一字槽外六角设计
Slotted fastening screws, inner slotted
outer hexagon design



尺寸定制规格多样
Diverse custom sizes



多种类型选择
Multiple type selection

使用寿命更长精度更高
Longer service life and higher precision



钢带冲孔
Steel strip through hole

304具有良好的耐腐蚀性、耐氧化、耐热、耐低温、高强度等。
304 has good rust resistance and corrosion resistance. Heat resistance, low temperature resistance, high strength, etc.

规格数值
型号齐全
Specification value
Full range of models

304不锈钢标志
304 stainless steel mark

坚固锁头
Strong lock



精湛工艺
Exquisite craftsmanship

304不锈钢, 外观亮洁如新, 满足您的所有需求
304 stainless steel, bright and clean appearance, to meet all your needs

例如: 13--23表示可以用在直径12mm-23mm管道上 单位: mm

For example: 13--23 means it can be used on pipes with a diameter of 12mm-23mm Unit: mm

规格 Specifications	材质 Material	带宽 Bandwidth	厚度 Thickness	最小直径 Min. Dia.	最大直径 Max. Dia.	重量 (100个) Weight (100 pcs)
13-23	304	12/12.7/14mm	0.6mm	13mm	23mm	0.9kg
14-27	304	12/12.7/14mm	0.6mm	14mm	27mm	1.0kg
18-32	304	12/12.7/14mm	0.6mm	18mm	32mm	1.3kg
21-44	304	12/12.7/14mm	0.6mm	21mm	44mm	1.61kg
27-51	304	12/12.7/14mm	0.6mm	27mm	51mm	1.7kg
33-57	304	12/12.7/14mm	0.6mm	33mm	57mm	1.8kg
40-63	304	12/12.7/14mm	0.6mm	40mm	63mm	1.9kg
46-70	304	12/12.7/14mm	0.6mm	46mm	70mm	2.0kg
52-76	304	12/12.7/14mm	0.6mm	52mm	76mm	2.2kg
59-82	304	12/12.7/14mm	0.6mm	59mm	82mm	2.36kg
65-89	304	12/12.7/14mm	0.6mm	65mm	89mm	2.5kg
72-95	304	12/12.7/14mm	0.6mm	72mm	95mm	2.6kg
78-101	304	12/12.7/14mm	0.6mm	78mm	101mm	2.7kg
84-108	304	12/12.7/14mm	0.6mm	84mm	108mm	2.75kg
91-114	304	12/12.7/14mm	0.6mm	91mm	114mm	2.8kg
105-127	304	12/12.7/14mm	0.6mm	105mm	127mm	3.0kg
118-140	304	12/12.7/14mm	0.6mm	118mm	140mm	3.4kg
130-152	304	12/12.7/14mm	0.6mm	130mm	152mm	3.5kg
141-165	304	12/12.7/14mm	0.6mm	141mm	165mm	3.7kg
155-178	304	12/12.7/14mm	0.6mm	155mm	178mm	4.0kg
175-197	304	12/12.7/14mm	0.6mm	175mm	197mm	4.3kg
194-216	304	12/12.7/14mm	0.6mm	194mm	216mm	4.4kg
213-235	304	12/12.7/14mm	0.6mm	213mm	235mm	4.9kg
232-254	304	12/12.7/14mm	0.6mm	232mm	254mm	5.3kg
251-273	304	12/12.7/14mm	0.6mm	251mm	273mm	5.6kg
270-292	304	12/12.7/14mm	0.6mm	270mm	292mm	6.0kg
289-311	304	12/12.7/14mm	0.6mm	289mm	311mm	6.2kg



最小可调节状态
Minimum adjustable state



最大可调节状态
Maximum adjustable state

常用尺寸推荐:
Common size recommendations:
选购前, 需要测量管子外径或者周长
Before purchasing, you need to measure the outer diameter or circumference of the pipe
周长换算成外径公式: 周长+3.14
The formula for converting circumference into outer diameter: circumference +3.14
煤气管、天然气管、热水管: 13-19mm
Gas pipe, natural gas pipe, water heater pipe: 13-19mm
氧气乙炔管、汽车油管: 10-16mm
Oxygen acetylene pipe, automobile oil pipe: 10-16mm
家庭水龙头管: 16-25mm
Home faucet pipe: 16-25mm
油烟机管: 155-178mm
Range hood tube: 155-178mm



例如: 13--23表示可以用在直径12mm-23mm管道上 单位: mm

For example: 13--23 means it can be used on pipes with a diameter of 12mm-23mm Unit: mm

规格 Specifications	材质 Material	带宽 Bandwidth	厚度 Thickness	最小直径 Min. Dia.	最大直径 Max. Dia.	重量 (100个) Weight (100 pcs)
13-23	304	12/12.7/14mm	0.6mm	13mm	23mm	0.9kg
14-27	304	12/12.7/14mm	0.6mm	14mm	27mm	1.0kg
18-32	304	12/12.7/14mm	0.6mm	18mm	32mm	1.3kg
21-44	304	12/12.7/14mm	0.6mm	21mm	44mm	1.61kg
27-51	304	12/12.7/14mm	0.6mm	27mm	51mm	1.7kg
33-57	304	12/12.7/14mm	0.6mm	33mm	57mm	1.8kg
40-63	304	12/12.7/14mm	0.6mm	40mm	63mm	1.9kg
46-70	304	12/12.7/14mm	0.6mm	46mm	70mm	2.0kg
52-76	304	12/12.7/14mm	0.6mm	52mm	76mm	2.2kg
59-82	304	12/12.7/14mm	0.6mm	59mm	82mm	2.36kg
65-89	304	12/12.7/14mm	0.6mm	65mm	89mm	2.5kg
72-95	304	12/12.7/14mm	0.6mm	72mm	95mm	2.6kg
78-101	304	12/12.7/14mm	0.6mm	78mm	101mm	2.7kg
84-108	304	12/12.7/14mm	0.6mm	84mm	108mm	2.75kg
91-114	304	12/12.7/14mm	0.6mm	91mm	114mm	2.8kg
105-127	304	12/12.7/14mm	0.6mm	105mm	127mm	3.0kg
118-140	304	12/12.7/14mm	0.6mm	118mm	140mm	3.4kg
130-152	304	12/12.7/14mm	0.6mm	130mm	152mm	3.5kg
141-165	304	12/12.7/14mm	0.6mm	141mm	165mm	3.7kg
155-178	304	12/12.7/14mm	0.6mm	155mm	178mm	4.0kg
175-197	304	12/12.7/14mm	0.6mm	175mm	197mm	4.3kg
194-216	304	12/12.7/14mm	0.6mm	194mm	216mm	4.4kg
213-235	304	12/12.7/14mm	0.6mm	213mm	235mm	4.9kg
232-254	304	12/12.7/14mm	0.6mm	232mm	254mm	5.3kg
251-273	304	12/12.7/14mm	0.6mm	251mm	273mm	5.6kg
270-292	304	12/12.7/14mm	0.6mm	270mm	292mm	6.0kg
289-311	304	12/12.7/14mm	0.6mm	289mm	311mm	6.2kg



例如: 13--23表示可以用在直径12mm-23mm管道上 单位: mm

For example: 13--23 means it can be used on pipes with a diameter of 12mm-23mm Unit: mm

规格 Specifications	材质 Material	带宽 Bandwidth	厚度 Thickness	最小直径 Min. Dia.	最大直径 Max. Dia.	重量 (100个) Weight (100 pcs)
13-23	304	12/12.7/14mm	0.6mm	13mm	23mm	0.9kg
14-27	304	12/12.7/14mm	0.6mm	14mm	27mm	1.0kg
18-32	304	12/12.7/14mm	0.6mm	18mm	32mm	1.3kg
21-44	304	12/12.7/14mm	0.6mm	21mm	44mm	1.61kg
27-51	304	12/12.7/14mm	0.6mm	27mm	51mm	1.7kg
33-57	304	12/12.7/14mm	0.6mm	33mm	57mm	1.8kg
40-63	304	12/12.7/14mm	0.6mm	40mm	63mm	1.9kg
46-70	304	12/12.7/14mm	0.6mm	46mm	70mm	2.0kg
52-76	304	12/12.7/14mm	0.6mm	52mm	76mm	2.2kg
59-82	304	12/12.7/14mm	0.6mm	59mm	82mm	2.36kg
65-89	304	12/12.7/14mm	0.6mm	65mm	89mm	2.5kg
72-95	304	12/12.7/14mm	0.6mm	72mm	95mm	2.6kg
78-101	304	12/12.7/14mm	0.6mm	78mm	101mm	2.7kg
84-108	304	12/12.7/14mm	0.6mm	84mm	108mm	2.75kg
91-114	304	12/12.7/14mm	0.6mm	91mm	114mm	2.8kg
105-127	304	12/12.7/14mm	0.6mm	105mm	127mm	3.0kg
118-140	304	12/12.7/14mm	0.6mm	118mm	140mm	3.4kg
130-152	304	12/12.7/14mm	0.6mm	130mm	152mm	3.5kg
141-165	304	12/12.7/14mm	0.6mm	141mm	165mm	3.7kg
155-178	304	12/12.7/14mm	0.6mm	155mm	178mm	4.0kg
175-197	304	12/12.7/14mm	0.6mm	175mm	197mm	4.3kg
194-216	304	12/12.7/14mm	0.6mm	194mm	216mm	4.4kg
213-235	304	12/12.7/14mm	0.6mm	213mm	235mm	4.9kg
232-254	304	12/12.7/14mm	0.6mm	232mm	254mm	5.3kg
251-273	304	12/12.7/14mm	0.6mm	251mm	273mm	5.6kg
270-292	304	12/12.7/14mm	0.6mm	270mm	292mm	6.0kg
289-311	304	12/12.7/14mm	0.6mm	289mm	311mm	6.2kg



例如：13--23表示可以用在直径12mm-23mm管道上 单位：mm

For example: 13--23 means it can be used on pipes with a diameter of 12mm-23mm Unit: mm

规格 Specifications	材质 Material	宽度 Width	厚度 Thickness	L (mm)	L1 (mm)	重量 (100个) Weight (100 pcs)
6-12	304	8mm	0.6mm	6mm	12mm	/
8-16	304	8mm	0.6mm	8mm	16mm	/
10-16	304	8mm	0.6mm	10mm	16mm	/
11-20	304	8mm	0.6mm	11mm	20mm	/
13-19	304	8mm	0.6mm	13mm	19mm	/
13-23	304	8mm	0.6mm	13mm	23mm	/
14-27	304	12mm	0.6mm	14mm	27mm	1.0kg
18-32	304	12mm	0.6mm	18mm	32mm	1.3kg
21-38	304	12mm	0.6mm	21mm	38mm	1.32kg
21-44	304	12mm	0.6mm	21mm	44mm	1.7kg
27-51	304	12mm	0.6mm	27mm	51mm	1.8kg
33-57	304	12mm	0.6mm	33mm	57mm	1.9kg
40-63	304	12mm	0.6mm	40mm	63mm	2.0kg
46-70	304	12mm	0.6mm	46mm	70mm	2.2kg
52-76	304	12mm	0.6mm	52mm	76mm	2.3kg
59-28	304	12mm	0.6mm	59mm	82mm	2.46kg
65-89	304	12mm	0.6mm	65mm	89mm	2.6kg
72-95	304	12mm	0.6mm	72mm	95mm	2.7kg
78-101	304	12mm	0.6mm	78mm	101mm	2.75kg

常用尺寸推荐:

Common size recommendations:

选购前，需要测量管子的外径或者周长

Before purchasing, you need to measure the outer diameter or circumference of the pipe

周长换算成外径公式：周长+3.14

The formula for converting circumference into outer diameter: circumference + 3.14

煤气管、天然气管、热水管：13-19mm

Gas pipe, natural gas pipe, water heater pipe: 13-19mm

氧气乙炔管、汽车油管：10-16mm

Oxygen acetylene pipe, automobile oil pipe: 10-16mm

家庭水龙头管：16-25mm

Home faucet pipe: 16-25mm

油烟机管：155-178mm

Range hood tube: 155-178mm





细节缔造值得信赖
Details create trustworthiness.


使用寿命更长精度更高
Longer service life and higher precision.
精湛工艺
Fine Qi process.
优选304不锈钢，外观亮洁如新，
Preferred 304 stainless steel, the appearance is as bright and clean as new.
满足您的所有需求
Meet all your needs



加厚卡扣
Thickened buckle



优选材质，扎力紧实
Best material, strong and firm

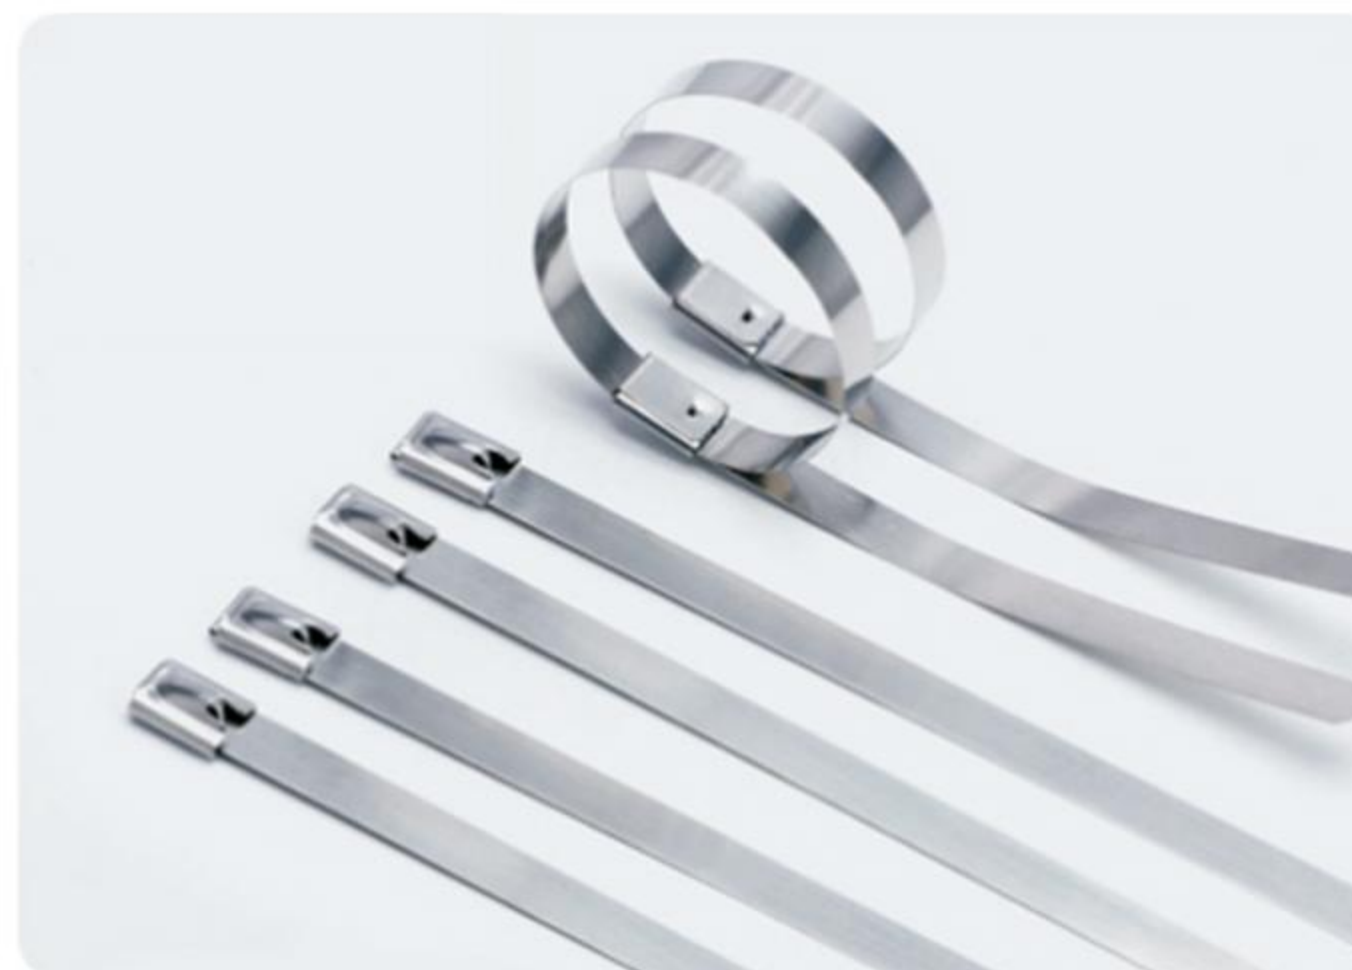


尺寸定制规格多样
Diverse custom sizes

型号 Item NO.	长度 Length		宽度 Width	厚度 Thickness	捆扎范围 Bundle Dia.	拉力 Min.loop Tensile Strength	
	inch	mm				LBS	kgs
NLSS-4.6X130	5-1/8"	130	4.6	0.25	31	135	60
NLSS-4.6X150	6"	150	4.6	0.25	37	135	60
NLSS-4.6X200	8"	200	4.6	0.25	50	135	60
NLSS-4.6X250	10"	250	4.6	0.25	63	135	60
NLSS-4.6X300	11-5/8"	300	4.6	0.25	76	135	60
NLSS-4.6X350	13-3/4"	350	4.6	0.25	89	135	60
NLSS-4.6X400	15-3/4"	400	4.6	0.25	102	135	60
NLSS-4.6X450	17-3/4"	450	4.6	0.25	115	135	60
NLSS-4.6X500	19-11/16"	500	4.6	0.25	128	135	60
NLSS-7.9X150	6"	150	7.9	0.25	37	230	100
NLSS-7.9X200	8"	200	7.9	0.25	50	230	100
NLSS-7.9X250	10"	250	7.9	0.25	63	230	100

型号 Item NO.	长度 Length		宽度 Width	厚度 Thickness	捆扎范围 Bundle Dia.	拉力 Min.loop Tensile Strength	
	inch	mm				LBS	kgs
NLSS-7.9X300	11-5/8"	300	7.9	0.25	79	230	100
NLSS-7.9X350	13-3/4"	350	7.9	0.25	89	230	100
NLSS-7.9X400	15-3/4"	400	7.9	0.25	102	230	100
NLSS-7.9X450	17-3/4"	450	7.9	0.25	115	230	100
NLSS-7.9X500	19-11/16"	500	7.9	0.25	128	230	100
NLSS-7.9X550	21-1/16"	550	7.9	0.25	141	230	100
NLSS-7.9X600	23-5/8"	600	7.9	0.25	154	230	100
NLSS-7.9X650	25-9/16"	650	7.9	0.25	167	230	100
NLSS-10.0X150	6"	150	10.0	0.25	37	270	120
NLSS-10.0X200	8"	200	10.0	0.25	50	270	120
NLSS-10.0X250	10"	250	10.0	0.25	63	270	120
NLSS-10.0X300	11-5/8"	300	10.0	0.25	76	270	120
NLSS-10.0X350	13-3/4"	350	10.0	0.25	89	270	120
NLSS-10.0X400	15-3/4"	400	10.0	0.25	102	270	120
NLSS-10.0X450	17-3/4"	450	10.0	0.25	115	270	120
NLSS-10.0X500	19-11/16"	500	10.0	0.25	128	270	120
NLSS-10.0X550	21-1-1/16"	550	10.0	0.25	141	270	120
NLSS-10.0X600	23-5/8"	600	10.0	0.25	154	270	120
NLSS-10.0X650	25-9/16"	650	10.0	0.25	167	270	120
NLSS-10.0X700	27-1/2"	700	10.0	0.25	180	270	120
NLSS-12X200	8"	200	12.0	0.25	50	337	150
NLSS-12X250	10"	250	12.0	0.25	63	337	150
NLSS-12X300	11-5/8"	300	12.0	0.25	76	337	150
NLSS-12X350	13-3/4"	350	12.0	0.25	89	337	150
NLSS-12X400	15-3/4"	400	12.0	0.25	102	337	150
NLSS-12X450	17-3/4"	450	12.0	0.25	115	337	150
NLSS-12X500	19-11/16"	500	12.0	0.25	128	337	150
NLSS-12X550	21-1/16"	550	12.0	0.25	141	337	150
NLSS-12X600	23-5/8"	600	12.0	0.25	154	337	150
NLSS-12X650	25-9/16"	650	12.0	0.25	167	337	150
NLSS-12X700	27-1/2"	700	12.0	0.25	180	337	150
NLSS-12X800	31-1/2"	800	12.0	0.25	193	337	150
NLSS-12X1000	39-3/8"	1000	12.0	0.25	206	337	150



商品名称: 阶梯式不锈钢扎带
Product name: Stepped stainless steel tie
产品规格: 4.5mm/7mm/10mm(宽)
Product specifications: 4.5mm/7mm/10mm(Wide)
尺寸: 长度可定制
Dimensions: The length can be customized
材质: 304不锈钢
Material: 304 stainless steel
应用场所: 电力通讯、石油化工、保暖管道等
Application site: Electric power communication, petrochemical industry, warm pipe, etc.

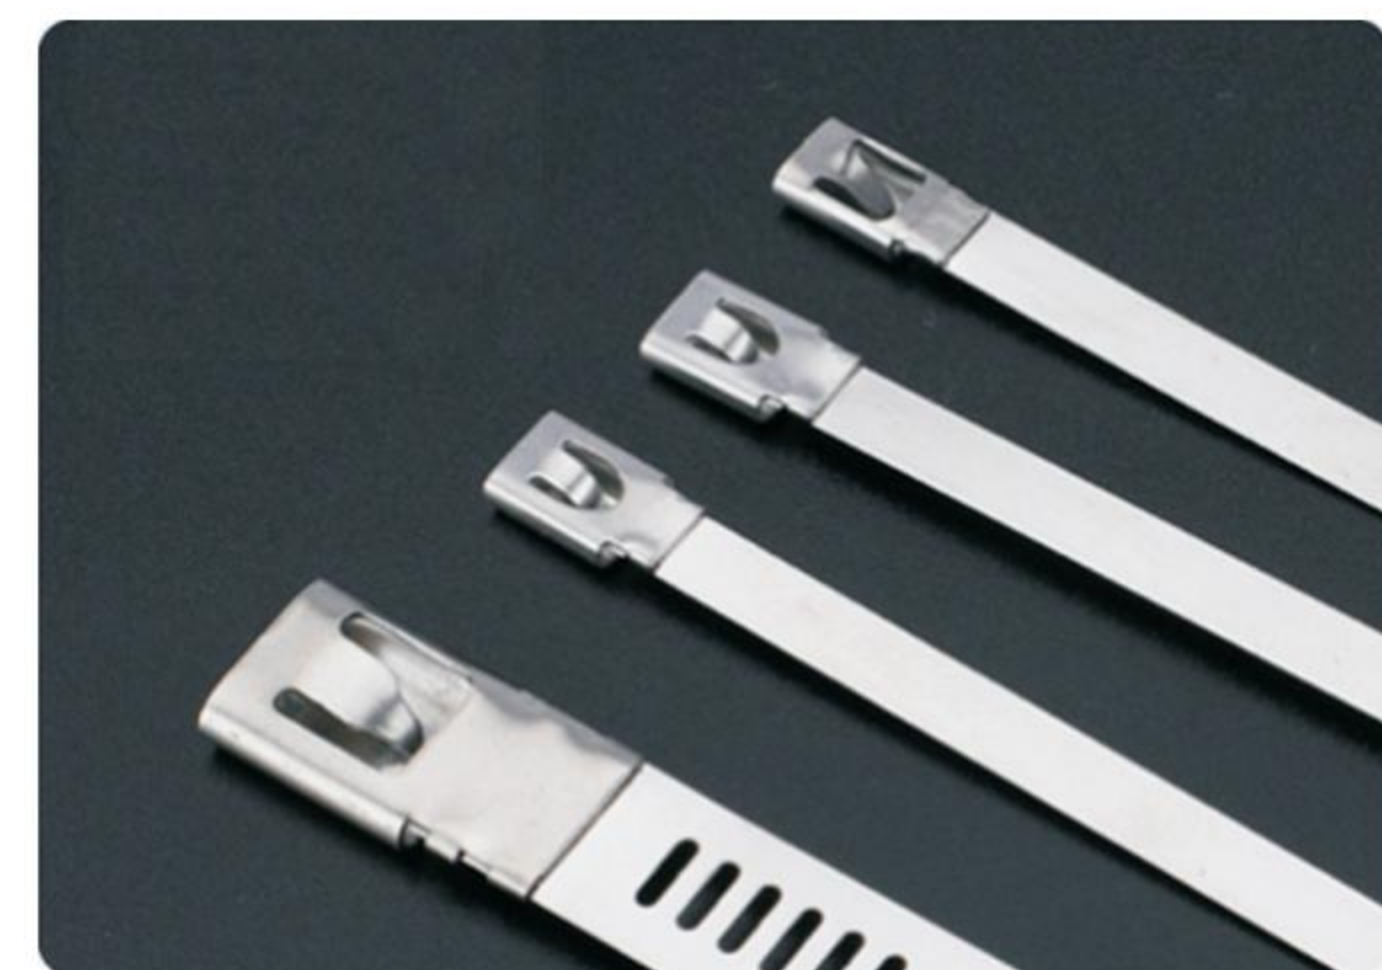

扎力紧实
Strong and firm



快速捆绑
Fast binding



尺寸定制规格多样
Diverse custom sizes

型号 Item NO.	长度 Length		宽度 Width	厚度 Thickness	捆扎范围 Bundle Dia.	拉力 Min.loop Tensile Strength	
	inch	mm				LBS	kgs
NLSD-4.6X150	6"	150	4.6	0.25	37	110	50
NLSD-4.6X200	8"	200	4.6	0.25	50	110	50
NLSD-4.6X250	10"	250	4.6	0.25	63	110	50
NLSD-4.6X300	11-5/8"	300	4.6	0.25	76	110	50
NLSD-4.6X350	13-3/4"	350	4.6	0.25	89	100	50
NLSD-4.6X400	15-3/4"	400	4.6	0.25	102	100	50
NLSD-4.6X450	17-3/4"	450	4.6	0.25	115	100	50
NLSD-4.6X500	19-11/16"	500	4.6	0.25	128	100	50
NLSD-7.9X150	6"	150	7.0	0.25	37	155	70
NLSD-7.9X200	8"	200	7.0	0.25	50	155	70
NLSD-7.9X250	10"	250	7.0	0.25	63	155	70
NLSD-7.9X300	11-5/8"	300	7.0	0.25	76	155	70

型号 Item NO.	长度 Length		宽度 Width	厚度 Thickness	捆扎范围 Bundle Dia.	拉力 Min.loop Tensile Strength	
	inch	mm				LBS	kgs
NLSD-7.9X350	13-3/4"	350	7.0	0.25	89	155	70
NLSD-7.9X400	15-3/4"	400	7.0	0.25	102	155	70
NLSD-7.9X450	17-3/4"	450	7.0	0.25	115	155	70
NLSD-7.9X500	19-11/16"	500	7.0	0.25	128	155	70
NLSD-7.9X550	21-1/16"	550	7.0	0.25	141	155	70
NLSD-7.9X600	23-5/8"	600	7.0	0.25	154	155	70
NLSD-7.9X650	25-9/16"	650	7.0	0.25	167	155	70
NLSD-10.0X150	6"	150	10.0	0.25	37	220	100
NLSD-10.0X200	8"	200	10.0	0.25	50	220	100
NLSD-10.0X250	10"	250	10.0	0.25	63	220	100
NLSD-10.0X300	11-5/8"	300	10.0	0.25	76	220	100
NLSD-10.0X350	13-3/4"	350	10.0	0.25	89	220	100
NLSD-10.0X400	15-3/4"	400	10.0	0.25	102	220	100
NLSD-10.0X450	17-3/4"	450	10.0	0.25	115	220	100
NLSD-10.0X500	19-11/16"	500	10.0	0.25	128	220	100
NLSD-10.0X550	21-1-1/16"	550	10.0	0.25	141	220	100
NLSD-10.0X600	23-5/8"	600	10.0	0.25	154	220	100
NLSD-10.0X650	25-9/16"	650	10.0	0.25	167	220	100
NLSD-10.0X700	27-1/2"	700	10.0	0.25	180	220	100



商品名称: 喷塑不锈钢扎带
Product name: Plastic sprayed stainless steel tie
产品规格: 4.6mm/8mm(宽)
Product specifications: 4.6mm/8mm(Wide)
尺寸: 长度可定制
Dimensions: The length can be customized
材质: 304不锈钢
Material: 304 stainless steel
应用场所: 电力通讯、石油化工、保暖管道等
Application site: Electric power communication, petrochemical industry, warm pipe, etc.



扎力紧实
Strong and firm

快速捆绑
Fast binding

尺寸定制规格多样
Diverse custom sizes

型号 Item NO.	长度 Length		宽度 Width	厚度 Thickness	捆扎范围 Bundle Dia.	拉力 Min.loop Tensile Strength	
	inch	mm				LBS	kgs
NLSC-4.6X130	5-1/8"	130	4.6	0.25	31	135	60
NLSC-4.6X150	6"	150	4.6	0.25	37	135	60
NLSC-4.6X200	8"	200	4.6	0.25	50	135	60
NLSC-4.6X250	10"	250	4.6	0.25	63	135	60
NLSC-4.6X300	11-5/8"	300	4.6	0.25	76	135	60
NLSC-4.6X350	13-3/4"	350	4.6	0.25	89	135	60
NLSC-4.6X400	15-3/4"	400	4.6	0.25	102	135	60
NLSC-4.6X450	17-3/4"	450	4.6	0.25	115	135	60
NLSC-4.6X500	19-11/16"	500	4.6	0.25	128	135	60
NLSC-7.9X150	6"	150	7.9	0.25	37	230	100
NLSC-7.9X200	8"	200	7.9	0.25	50	230	100
NLSC-7.9X250	10"	250	7.9	0.25	63	230	100

型号 Item NO.	长度 Length		宽度 Width	厚度 Thickness	捆扎范围 Bundle Dia.	拉力 Min.loop Tensile Strength	
	inch	mm				LBS	kgs
NLSC-7.9X300	11-5/8"	300	7.9	0.25	76	230	100
NLSC-7.9X350	13-3/4"	350	7.9	0.25	89	230	100
NLSC-7.9X400	15-3/4"	400	7.9	0.25	102	230	100
NLSC-7.9X450	17-3/4"	450	7.9	0.25	115	230	100
NLSC-7.9X500	19-11/16"	500	7.9	0.25	128	230	100
NLSC-7.9X550	21-1/16"	550	7.9	0.25	141	230	100
NLSC-7.9X600	23-5/8"	600	7.9	0.25	154	230	100
NLSC-7.9X650	25-9/16"	650	7.9	0.25	167	230	100
NLSC-10.0X150	6"	150	10.0	0.25	37	270	120
NLSC-10.0X200	8"	200	10.0	0.25	50	270	120
NLSC-10.0X250	10"	250	10.0	0.25	63	270	120
NLSC-10.0X300	11-5/8"	300	10.0	0.25	76	270	120
NLSC-10.0X350	13-3/4"	350	10.0	0.25	89	270	120
NLSC-10.0X400	15-3/4"	400	10.0	0.25	102	270	120
NLSC-10.0X450	17-3/4"	450	10.0	0.25	115	270	120
NLSC-10.0X500	19-11/16"	500	10.0	0.25	128	270	120
NLSC-10.0X550	21-1-1/16"	550	10.0	0.25	141	270	120
NLSC-10.0X600	23-5/8"	600	10.0	0.25	154	270	120
NLSC-10.0X650	25-9/16"	650	10.0	0.25	167	270	120
NLSC-10.0X700	27-1/2"	700	10.0	0.25	180	270	120
NLSC-12X200	8"	200	12.0	0.25	50	337	150
NLSC-12X250	10"	250	12.0	0.25	63	337	150
NLSC-12X300	11-5/8"	300	12.0	0.25	76	337	150
NLSC-12X350	13-3/4"	350	12.0	0.25	89	337	150
NLSC-12X400	15-3/4"	400	12.0	0.25	102	337	150
NLSC-12X450	17-3/4"	450	12.0	0.25	115	337	150
NLSC-12X500	19-11/16"	500	12.0	0.25	128	337	150
NLSC-12X550	21-1-1/16"	550	12.0	0.25	141	337	150
NLSC-12X600	23-5/8"	600	12.0	0.25	154	337	150
NLSC-12X650	25-9/16"	650	12.0	0.25	167	337	150
NLSC-12X700	27-1/2"	700	12.0	0.25	180	337	150
NLSC-12X800	31-1/2"	800	12.0	0.25	193	337	150
NLSC-12X1000	39-3/8"	1000	12.0	0.25	206	337	150



商品名称: L型不锈钢扎带
 Product name: L-shaped stainless steel cable tie
 产品规格: 4.6mm/8mm(宽)
 Product specifications: 4.6mm/8mm(Wide)
 尺寸: 长度可定制
 Dimensions: The length can be customized
 材质: 304不锈钢
 Material: 304 stainless steel
 应用场所: 电力通讯、石油化工、保暖管道等
 Application site: Electric power communication, petrochemical industry, warm pipe, etc.



扎力紧实
Strong and firm

快速捆绑
Fast binding

尺寸定制规格多样
Diverse custom sizes

型号 Item NO.	长度 Length		宽度 Width	厚度 Thickness	捆扎范围 Bundle Dia.	拉力 Min.loop Tensile Strength	
	inch	mm				LBS	kgs
NLS-12X200L	8"	200	12.0	0.3	50	270	120
NLS-12X250L	10"	250	12.0	0.3	63	270	120
NLS-12X300L	11-5/8"	300	12.0	0.3	76	270	120
NLS-12X350L	13-3/4"	350	12.0	0.3	89	270	120
NLS-12X400L	15-3/4"	400	12.0	0.3	102	270	120
NLS-12X450L	17-3/4"	450	12.0	0.3	115	270	120
NLS-12X500L	19-11/16"	500	12.0	0.3	128	270	120
NLS-12X550L	21-1/6"	550	12.0	0.3	141	270	120
NLS-16X250L	10"	250	15.0	0.3	63	337	150
NLS-16X300L	11-5/8"	300	15.0	0.3	76	337	150
NLS-16X350L	13-3/4"	350	15.0	0.3	89	337	150
NLS-16X400L	15-3/4"	400	15.0	0.3	102	337	150

型号 Item NO.	长度 Length		宽度 Width	厚度 Thickness	捆扎范围 Bundle Dia.	拉力 Min.loop Tensile Strength	
	inch	mm				LBS	kgs
NLS-16X450L	17-3/4"	450	15.0	0.3	115	337	150
NLS-16X500L	19-11/16"	500	15.0	0.3	128	337	150
NLS-16X550L	21-1/16"	550	15.0	0.3	141	337	150
NLS-16X600L	23-5/8"	600	15.0	0.3	154	337	150
NLS-16X700L	27-1/2"	700	15.0	0.3	180	337	150
NLS-16X750L	30"	750	15.0	0.3	191	337	150
NLS-16X800L	31-1/2"	800	15.0	0.3	193	337	150
NLS-16X1000L	39-3/8"	1000	15.0	0.3	206	337	150
NLS-19X300L	11-5/8"	300	19.0	0.4	76	270	120
NLS-19X400L	15-3/4"	400	19.0	0.4	102	270	120
NLS-19X500L	19-11/16"	500	19.0	0.4	128	270	120
NLS-19X600L	23-5/8"	600	19.0	0.4	154	270	120
NLS-19X700L	27-1/2"	700	19.0	0.4	180	270	120
NLS-19X800L	31-1/2"	800	19.0	0.4	193	270	120
NLS-19X900L	35-2/5"	900	19.0	0.4	200	270	120
NLS-19X1000L	39-2/5"	1000	19.0	0.4	203	270	120



产品名称: L型不锈钢打包扣
Product name: L-shaped stainless steel packing buckle
产品规格: 6.4系列/10系列/12系列
Product specifications: 6.4 Series / 10 Series / 12 Series.
 16系列/19系列/25系列
 16 series / 19 series / 25 series
尺寸: 长度可定制
Dimensions: The length can be customized
材质: 304不锈钢
Material: 304 stainless steel
应用场所: 电力通讯、石油化工、暖管道等
Application site: Electric power communication, petrochemical industry, warm pipe, etc.



扎力紧实
Strong and firm

快速捆绑
Fast binding

尺寸定制规格多样
Diverse custom sizes

产品名称 Product name	L型不锈钢包扣 L-shaped stainless steel buckle	产品规格 Product Specifications	8/10/12.7/16/19
尺寸 Size	长度可定制 Length can be customized	数量 Quantity	100
材质 Material	304不锈钢 304 stainless steel	操作温度 Operating temperature	-80°C~538°C
颜色 Color	银色 Silver	防火等级 Fire-proof level	阻燃 Flame retardant
材料特性 Material properties	抗紫外线 Anti-UV	产品结构 Product structure	滚珠式自锁 Ball type self-locking

型号 Item NO.	宽度 Width		厚度 Thickness	数量/袋 Qty/bag
	mm	inch	mm	PCS
NL-LB8	8	0.4	0.7	100
NL-LB10	10	0.4	0.7	100
NL-LB12.7	12.7	0.4	0.7	100
NL-LB16	16	0.4	0.8	100
NL-LB19	19	0.4	0.8	100

可配扎带宽度
Can be equipped with cable tie width

厚度选用建议:
Thickness selection suggestion:
如果选用扎带厚度超过0.7mm, 使用加强型 (即更厚) 的扎扣
If the thickness of the tie is more than 0.7mm, use a reinforced (that is, thicker) tie
关于其他规格:
About other specifications:
适配扎带宽度为9.5~20.0MM的牙型不锈钢扎扣为常用款
The tooth-shaped stainless steel buckle with a width of 9.5~20.0MM is a commonly used model



产品名称: 牙型不锈钢打包扣
Product name: Tooth type stainless steel packing buckle
产品规格: 6.4系列/10系列/12系列
Product specifications: 6.4 Series / 10 Series / 12 Series.
 16系列/19系列/25系列
 16 series / 19 series / 25 series
尺寸: 长度可定制
Dimensions: The length can be customized
材质: 304不锈钢
Material: 304 stainless steel
应用场所: 电力通讯、石油化工、暖管道等
Application site: Electric power communication, petrochemical industry, warm pipe, etc.



扎力紧实
Strong and firm

快速捆绑
Fast binding

尺寸定制规格多样
Diverse custom sizes

产品名称 Product name	牙型不锈钢包扣 L-shaped stainless steel buckle	产品规格 Product Specifications	6.4/10/12.7/16/19
尺寸 Size	长度可定制 Length can be customized	数量 Quantity	100
材质 Material	304不锈钢 304 stainless steel	操作温度 Operating temperature	-80°C~538°C
颜色 Color	银色 Silver	防火等级 Fire-proof level	阻燃 Flame retardant
材料特性 Material properties	抗紫外线 Anti-UV	产品结构 Product structure	滚珠式自锁 Ball type self-locking

型号 Item NO.	宽度 Width		厚度 Thickness	数量/袋 Qty/bag
	mm	inch	mm	PCS
NL-DB6.4	6.4	0.4	0.5	100
NL-DB10	10	0.4	0.5-1	100
NL-DB12.7	12.7	0.4	1.2-1.5	100
NL-DB16	16	0.4	1.2-1.5	100
NL-DB19	19	0.4	1.2-1.8	100

可配扎带宽度
Can be equipped with cable tie width

材料厚度
Material thickness

锁紧扎带不打滑
Lock the cable ties without slipping

厚度选用建议:
Thickness selection suggestion:
如果选用扎带厚度超过0.7mm, 使用加强型 (即更厚) 的扎扣
If the thickness of the tie is more than 0.7mm, use a reinforced (that is, thicker) tie
关于其他规格:
About other specifications:
适配扎带宽度为9.5~20.0MM的牙型不锈钢扎扣为常用款
The tooth-shaped stainless steel buckle with a width of 9.5~20.0MM is a commonly used model

产品名称: 不锈钢扎带工具
Product name: Stainless steel strapping tool
产品规格: 全系列可选
Product specifications: Full range of options
产品材质: 合金钢
Product Material: Alloy steel
工作温度: -30°C-300°C
Working temperature: -30°C-300°C
产品用途: 捆扎电缆, 管道标牌, 托架等
Product uses: bundled cables, pipe signs, brackets, etc
产品特性: 耐酸, 抗腐蚀, 适用于各种室内外环境, 使用简单
Product characteristics: acid resistance, corrosion resistance, suitable for a variety of indoor and outdoor environments, easy to use



G600 不锈钢扎带工具 G600 Stainless steel strapping tool



舒适手柄
Comfortable handle
贴合手掌好操作
Fitting the palm of the hand is easy to operate
 塑粉厚实, 耐磨损, 防锈防腐蚀, 适合复杂的操作环境
 Plastic powder is thick, wear-resistant, anti-rust and anti-corrosion, suitable for complex operating environment



LQA 打包工具 LQA Packaging tool



刀口锋利
The knife edge is sharp.
使用携带方便
Easy to use and carry

塑粉厚实, 耐磨损, 防锈防腐蚀, 适合复杂的操作环境
 Plastic powder is thick, wear-resistant, anti-rust and anti-corrosion, suitable for complex operating environment



重型手摇式扎带工具 Heavy hand strapping tool



螺旋式扎带钳
Spiral belt binding forceps
 选材优良, 捆扎力强, 收缩紧, 上手操作简单
 Excellent material selection, strong binding force, tight contraction, easy to operate



G3388 不锈钢扎带枪 G3388 Stainless steel strapping gun



自锁式
Self-locking type
不锈钢扎带枪
Stainless steel strapping gun
 适用于自锁式不锈钢扎带, 收紧自动切断功能
 Suitable for self-locking stainless steel straps, tightening automatic cutting function



1. 档适合裁剪
1. The file is suitable for cutting
4. 档收紧力度大
4. The gear is tightened greatly